

**LAC ARSENAULT PROJECT
NI 43-101 TECHNICAL REPORT,
QUÉBEC, CANADA**

Prepared for

**AMSECO EXPLORATION LTD. &
CANADIAN GOLD RESOURCES LTD.**

**185 ROYAL OAKS BLVD.
SUITE 202
Moncton NB E1H 2P7
Canada**

Prepared by:
GoldMinds Geoservices Inc.
Claude Duplessis, Eng.

Issue date: August 29, 2024

Certificate of Qualification (Claude Duplessis)

Claude Duplessis, Eng. - GoldMinds Geoservices Inc. 2999 Chemin Sainte-Foy, suite 200, Québec, QC Canada G1X 1P7

To accompany the Report entitled: “LAC ARSENAULT NI 43-101 Technical Report, QUÉBEC, CANADA” dated August 29, 2024 (the “Technical Report”).

I, Claude Duplessis, Eng., do hereby certify that:

- a) I am a graduate from the University of Quebec in Chicoutimi, Quebec in 1988 with a B.Sc. in geological engineering and I have practised my profession continuously since that time;
- b) I am a registered member of the Ordre des Ingénieurs du Québec (Registration Number 45523). I am also a registered engineer in the province of Alberta, Ontario and Newfoundland & Labrador. I am a Member of the Canadian Institute of Mining, Metallurgy and Petroleum. I am a Senior Engineer and Consultant at GoldMinds Geoservices Inc.;
- c) I have worked as an engineer for a total of 34 years since my graduation. My relevant experience for the purpose of the Technical Report is: Over 25 years of consulting in the field of Mineral Resource estimation, orebody modelling, mineral processing, mine design, exploration, mineral resource auditing and geotechnical engineering, cash flow analysis, commodity market and economic analysis.
- d) I am responsible for all sections of the technical report .
- e) I have visited the Property from 28 to 30 July 2021 for Resources 1844 and June 12th 2024 for Canadian Gold & Amseco;
- f) I am independent of the issuer and previous owner (1844, Canadian Gold & Amseco) as defined in section 1.5 of NI 43-101(“The Instrument”); I am independent of the Vendor and the Property.
- g) I was involved in the preparation of the technical report as independent QP for previous owner 1844 Resources.
- h) I have read the definition of “qualified person” set out in the National Instrument 43-101 and certify that by reason of my education, affiliation with a professional association and past relevant work experience, I fulfil the requirements to be an independent qualified person for the purposes of NI 43-101;
- i) I have read NI 43-101 and Form 43-101F1 and have prepared the Technical Report in compliance with NI 43-101 and Form 43-101F1; and have prepared the report in conformity with generally accepted Canadian mining industry practice, and as of the date of this certificate, to the best of my knowledge, information and belief, the Technical Report contains all scientific and technical information that is required to be disclosed to make the Technical Report not misleading;
- j) I have no personal knowledge as of the date of this certificate of any material fact or material change, which is not reflected in this report.

This 29 day of August 2024, in Québec, Québec

Original signed and sealed

(Signed) “Claude Duplessis”

Claude Duplessis, P. Eng., (OIQ #45523)
GoldMinds Geoservices Inc.

TABLE OF CONTENTS

1	Summary (Item 1).....	11
2	Introduction (Item 2).....	17
2.1	Overview.....	17
2.2	Report Responsibility and Qualified Persons.....	17
2.3	Sources of information.....	18
2.4	Currency, Units, Abbreviations and Definitions.....	18
2.5	Disclaimer.....	20
3	Reliance on other experts (Item 3).....	20
4	Property description and location (Item 4).....	20
4.1	Location.....	20
4.2	Ownership, Royalties and Agreements.....	25
4.3	Quebec Mining Law.....	26
5	Accessibility, climate, local resources, infrastructures and physiography (Item 5).....	26
5.1	Accessibility.....	26
5.2	Climate.....	27
5.3	Local resources.....	29
5.4	Infrastructure.....	29
5.5	Physiography and vegetation.....	30
6	History (Item 6).....	32
7	Geological setting (Item 7).....	35
7.1	Regional geology.....	35
7.2	Property Geology.....	37
8	Deposit Types (Item 8).....	44

9	Exploration (Item 9)	44
9.1	Geophysical surveying.....	44
9.1.1	High-resolution magnetic (MAG) survey.....	44
9.1.1.1	Survey specifications.....	45
9.1.1.2	Results and Discussion.....	47
9.1.2	Resistivity and induced polarization survey.....	52
9.1.2.1	IP Survey technical specifications	53
9.1.2.2	Results and discussion.....	55
9.2	Surface sampling	57
9.2.1	Channel and grab samples	57
9.2.2	Soil samples.....	62
9.3	Recent work by Canadian Gold & 1844.....	67
9.3.1	Mapping & Prospection 2023.....	67
9.3.2	GoldMinds site visit of June 2024.....	69
10	Drilling (Item 10)	72
	<u>Historical (PREVIOUS PROPERTY OWNER) Neither Amseco Exploration Ltd. (Issuer) nor Canadian Gold Resources Ltd. (Target) have done exploration or drilling on the property. Except sampling of a 30 kg composite in June 2024 for Metallurgical testing and soil sampling in 2023...</u>	72
10.1	Historical drilling.....	72
10.2	Surface diamond drilling.....	75
11	Sample preparation, analysis and security (Item 11).....	76
11.1	soil sampling	76
11.1.1	Sampling procedures.....	76
11.1.2	Samples preparation and analysis.....	78
11.2	Drilling.....	78
11.2.1	Core sampling procedures	78

11.2.2	Sample preparation at the laboratory	80
11.3	Quality Assurance/Quality Control (QA/QC) program.....	80
11.3.1	Drilling program.....	80
11.3.2	Soil sampling program.....	83
11.4	Security	86
12	Data verification (item 12)	87
12.1	The database	87
12.2	Site visit.....	88
12.3	QA/QC program.....	89
12.4	Independent sampling.....	89
13	Mineral processing and metallurgical testing (Item 13)	93
14	Mineral resource estimate (Item 14)	94
23	Adjacent properties (Item 23).....	96
24	Other relevant data and information (Item 24).....	98
25	Interpretation and conclusions (Item 25).....	99
26	Recommendations (Item 26)	100
27	References (Item 27)	102

List of Tables

Table 1: Estimation of the exploration program at the Lac Arsenault property.....	15
Table 2 : List of abbreviations.....	18
Table 3 : Mining title list of the Lac Arsenault Property.....	23
Table 4 : Weather averages by Month at Bonaventure	29
Table 5 : Survey block particulars.....	44
Table 6 : Mineral claims covered by the survey.....	54
Table 7 : Class of value per element.....	66
Table 8 : Drill holes program 2005 information	73
Table 9 : The main mineralized intervals intersected during 2005 dilling program	74
Table 10 : Summary of the drilling program 2021	75
Table 11: The high grade intervals intersected during 2021 drilling program	76
Table 12 : Core sample original assays and their duplicates	82
Table 13 : Summary of analytical quality control data produced by 1844 Resources inc.....	89
Table 14 : Correlation between original assays and SGS re-assays control data for Au, Ag, Cu, Pb and Zn.....	90
Table 15 : Surface samples Assays (Au, Ag, Cu, Pb and Zn).....	90
Table 16: Estimation of the exploration program at the Lac Arsenault property.....	101

List of Figures

Figure 1: General location of the Lac Arsenault property	21
Figure 2: The mining claims location at Lac Arsenault property (July, 2024).....	22
Figure 3 : The property access road from Paspébiac (Google Map, course).....	27
Figure 4 : Monthly precipitation data (millimetres) at Bonaventure	28
Figure 5 : Monthly snowfall (millimetres) data at Bonaventure.....	28
Figure 6 : Monthly temperatures data (°C) at Bonaventure	28
Figure 7 : Lac Arsenault property showing boreal type vegetation(looking NE)	30
Figure 8 : Regional Geology (property red star).....	36
Figure 9 : Lac Arsenault trenches and veins location (Modified from Mersereau, 1987)	38
Figure 10 : The conceptual model of formation and deformation of quartz veins at the Lac Arsenault project (M. Desrochers)	40
Figure 11 : Induce polarization survey with the location of the major mineralized veins at the Lac Arsenault (source 1844).....	42
Figure 12 : Structural features of shear zones and associated vein types (Hodgson, 1987).....	43
Figure 13 : Regional Survey location (NAD-83 datum, UTM projection zone 20N)	45
Figure 14 : High resolution interpreted magnetic survey (1844)	48
Figure 15 : Residual Total Magnetic Intensity with equal area color distribution (1844).....	49
Figure 16 : Tilt Angle Derivative (1844).....	50
Figure 17 : First Vertical Derivative of the TMI (1844).....	51
Figure 18 : Regional location of the Lac Arsenault Project and IP survey grid (1844)	52
Figure 19 : Digital elevation model with survey lines and mineral claims (1844).....	53
Figure 20 : Field conditions on the Lac Arsenault project (1844)	54
Figure 21 : IP interpretation over airborne FVD data (1844)	56
Figure 22 : Structural data and surface samples from Baker zone (1844)	58
Figure 23 : Structural data and surface samples from L4W zone (1844).....	59

Figure 24 : Structural data and surface samples from Marleau zone (1844)	60
Figure 25 : Structural data and surface samples from Mersereau zone (1844)	61
Figure 26 : Location of soil samples (1844)	63
Figure 27 : Soil samples and Au (ppb) results (1844)	64
Figure 28 : Soil samples and Ag (ppb) results (1844)	64
Figure 29 : Soil samples and Sc (ppm) results (1844)	65
Figure 30: Traverse and sample points (B.O. Martel 2023).....	69
Figure 31: Duplessis marking sample bag and vein in the steep slope	69
Figure 32: Mersereau Vein in steep slope.....	70
Figure 33: Close-up view of vein mineralization.....	72
Figure 34: Historical drillholes	72
Figure 35 : Drill holes location program 2005.....	73
Figure 36: Collars location, drilling program 2021.....	75
Figure 37 : Soil sampler Auger (example).....	77
Figure 38 : Drill core boxes (hole LA-21-01)	79
Figure 39: Electrical saw used for cutting the core samples	79
Figure 40 : Standards and blank samples, Au g/t	81
Figure 41 : Original assays and duplicate Au g/t	81
Figure 42 : Original assays and duplicate Ag g/t.....	82
Figure 43 : Original assays and duplicate Cu ppm	83
Figure 44 : Soil sample duplicate for Au-Ag-As-Pb assemblage.....	84
Figure 45 : Soil sample duplicate for Cu-Co-Ni-Zn assemblage	85
Figure 46 : Soil sample duplicate for Cr-Mo-Ti-Sb.....	85
Figure 47 : ALS soil sample re-assays.	86
Figure 48 : Drill hole location	87

Figure 49 : A) Core shack racks; B) Core boxe showing tag sample at the end of the sample interval; C) Independent core samples taken by M. Duplessis for assay.....	88
Figure 50 : Location of the independant surface samples, Lac Arsenault.....	91
Figure 51 : Adjacent properties.....	97

1 Summary (Item 1)

Introduction

This technical report, completed in accordance with National Instrument (NI) 43-101 guidelines, has been prepared for the Lac Arsenault project at the request of Canadian Gold resources Ltd. & Amseco Exploration Ltd.

This report provides a summary of the technical information relating to the exploration activities, carried out on the Lac Arsenault project as per July 2024.

The Lac Arsenault property is located in the Paspébiac area, Gaspésie region, Province of Québec.



The purpose of this technical report is a reverse takeover (RTO) where Amseco will have name changed to Canadian Gold as part of the transaction. In press release of June 3rd 2024 ; AMSECO EXPLORATION ANNOUNCES DEFINITIVE AGREEMENT FOR PROPOSED REVERSE TAKEOVER TRANSACTION WITH CANADIAN GOLD RESOURCES LTD.

Amseco Exploration Ltd. (the “**Company**” or “**Amseco**”) entered into a share exchange agreement with Canadian Gold Resources Ltd. (“**Canadian Gold**”) and the shareholders of Canadian Gold (the “**Canadian Gold Shareholders**”), dated May 31, 2024 (the “**Agreement**”) in respect of a proposed share acquisition of Canadian Gold (the “**Transaction**”). It is anticipated that the Proposed Transaction will constitute a “Reverse Takeover” of Amseco in accordance with Policy 5.2 – *Changes of Business and Reverse Takeovers* of the Exchange.

Pursuant to the Agreement, in consideration for the acquisition of all the issued and outstanding common shares in the capital of Canadian Gold (the “**Canadian Gold Shares**”), the Company will issue 20,000,000 common shares in the capital of the Company (the “**Amseco Shares**”) on a post-consolidation basis, at a deemed price of \$0.25 per Amseco Share. The Transaction will result in the reverse takeover of Amseco by Canadian Gold. As such, Canadian Gold will become a wholly-owned subsidiary of Amseco and Amseco will be the exclusive owner of the Lac Arsenault property. Concurrent with the closing of the Transaction, Amseco will change its name to “Canadian Gold Resources Ltd.” or a similar name.

The property was owned by 1844 Resources Inc. (formerly Gespeg Copper Resources Inc.) and an agreement was signed in January 27, 2023 between 1844 Resources Inc. (The Vendor) and Canadian Gold Resources Ltd. (The Purchaser) The Purchase price for the mining claims is six hundred thousand Canadian dollars (\$600,000.00CAD).

- One hundred thousand Canadian Dollars (\$100,000.00CAD) was paid in cash to 1844 Resources Inc.
- From the treasury of the purchaser having a value of Five Hundred Thousand Canadian dollars (\$500,000.00CAD) that is provided to the Vendor.

The Vendor shall be entitled to a one percent (1%) NSR and the Purchaser shall have the right to repurchase the NSR for Five Hundred Thousand Canadian Dollars (\$500,000.00CAD).

All the engagements have been done by the vendor and Canadian Gold.

The effective date of the technical report is July 16th, 2024.

Property Description and Location

The Lac Arsenault property is located in the province of Québec, Gaspé Peninsula, southwest of Gaspé Municipality (Figure 1). The Lac Arsenault property is centered at 335612 mE and 5360068 mN within National Topographic System (NTS) map sheets 22A06. The locations in this report are referenced to NAD 83 UTM coordinates zone 20.

Table 3, lists the status of these cells which include the claim number, the expiry date, the area in hectare, the excess work credit and the required work and fees.

Royalties

The mining claims concerned in this report were owned by 1844 Resources Inc. (formerly Gespeg Copper Resources Inc.) and were transferred to The Canadian Gold Resources LTD. when the payment was fully made.

The vendor (1844 Resources Inc.) is entitled to a one (1%) NSR and the Purchaser (The Canadian Gold Resources Ltd.) have the right to repurchase the NSR for Five Hundred Thousand Canadian Dollars (\$500,000.00CAD).

Accessibility, Climate, Local Resources, Infrastructure and Physiography

The Lac Arsenault property is located near the boundary of Honorat and Weir Townships approximately twenty-five kilometers north of the village of Paspébiac.

The claims group can be reached in approximately 2 hours from Paspébiac town (Figure 3). From Paspébiac town head north to the small farming community saint-Jogues, and then travelling over jeep road (26 km) to the small Lac Arsenault.

The interior climate of the Gaspé Peninsula is of the boreal type. Relief and maritime influence are responsible for strong differences in temperature and precipitation. The climate in the Bonaventure city (disponible climate data close from the property) is cold in the winter and temperate in the summer with a significant rainfall. The average annual temperature is 4.3°C (39.7 °F). The precipitation is about 1334 mm per year. The driest month is February with 80 mm of rainfall. Most of the precipitation here falls in October averaging 145 mm. The difference in precipitation between the driest month and the wettest month is 65 mm. Throughout the year, temperatures vary by 29.1 °C.

Mining in the region has existed for a century with Gaspé Copper in Murdochville. The mining manpower is available in the region (Ste-Anne-des-Monts, Gaspé, Chandler and Bonaventure). There is enough water in the area (Lac Arsenault) to supply exploration and mining activities.

Basic supplies such as food and limited accommodation are available at Paspébiac town. The largest nearby community is Bonaventure, located 58 km south of the property. The special items can be purchased from Bonaventure town.

Geology Setting and Mineralization

The Lac Arsenault property is situated in a sequence of Palaeozoic metasedimentary rocks, located near the eastern end of the Aroostook-Matapedia Anticlinorium a major structural unit of the Appalachians that extends from Matapedia to Percé in Quebec. The Anticlinorium is bordered to the north by the Siluro-Devonian Gaspé- Connecticut Valley synclinorium, and to the south by the Siluro-Devonian Baie-des-Chaleurs synclinorium.

The property is situated within an assemblage of Paleozoic metasedimentary rocks along the eastern limit of the Aroostook-Matapedia Anticlinorium. The claims are underlain by the Arsenault Formation and Garin Formation sediments of the Ordovician Honorat Group.

The mineralization in the Lac Arsenault property occurs within the Honorat Group rocks. The mineralization is vein type, characterized by brittle deformation and occurs in competent Honorat

Group sandstones and greywackes. Mineralization has not been located to date in the chemically favourable Matapedia Group limestones to the north of the Grand Pabos fault.

Drilling, Sampling Method, Approach and Analysis

In 2021 the company (1844 Resources from which Canadian Gold made the acquisition) started a diamond drilling program at the Lac Arsenault property. The drilling program consist of eleven holes drilled on three claims (2488082, 2488083 and 2488084) totaling 1951.9 metres.

All logging activities took place at the core shack located on Lac Arsenault's property following procedures further described herein. At reception, all core boxes were stacked on tables where quick logging is performed. Once complete, they are then palleted and stored within the fenced property until the full complete log is performed. All meterage wood blocks were verified to control core box numbers and any possible mistakes made during drilling procedures.

The drill core samples less than 25 cm of the mineralized intervals were not splitted and were totally sent to the lab for assaying. This later do not reflect the best practice of drill holes sampling. Even in the mineralized intervals the core has to be cut in half with one half to the lab and the other half to be archived for future use.

The core sample preparation, handling and transport all followed a safety procedure that included a strict chain of custody from sampling to the laboratory.

Data Verification

The diamond drilling data was verified and validated by the authors, after that they have been integrated into the database. Claude Duplessis visited the property and used a portable GPS for collars location. The 1844 resource's geologist used a portable GPS for collars location. The collar surveys are considered adequate for the purpose of this report, but it is recommended that all collars be surveyed using a total station or a DGPS.

Mr. Duplessis, Eng. of GoldMinds Geoservices inc.(GMG), accompanied by Sylvain Laberge President and CEO of the 1844 Resources Inc. visited the property from July 28 to 30 July 2021. The site visit focused on the verification of the field data, independent sampling and the visit of the core shack situated in the Municipality of Paspebiac for 1844. A recent site visit took place on June 12th 2024 for the benefit of Canadian Gold/Amseco. A composite sample was taken for metallurgical testing at SGS.

All core samples were assayed in one laboratory (ALS) and no external laboratory used. GMG had access to the assay certificates and the geological logs. In general, the authors considers that the quality control program implemented during the drilling campaign meet industry best practices. The authors did not identify any accuracy or precision issues and concluded that the analytical data reviewed are acceptable.

Mineral Resource Estimate

There are no mineral resources.

Interpretation and Conclusions

The author site visit with independent sampling shows high mineralized zones with up to 17.43 g/t Au at Baker vein. The authors believe that the various mineralized structures on the Lac Arsenault property (L4W, Donat, Baker, Mersereau and Marleau), have excellent exploration potential along strike and at depth surrounding the Au showings. More detailed knowledge and understanding of the property-scale controls and structures will help guide and focus future drilling programs. The authors believe that the Canadian Gold Resources LTD., could continue to refine its understanding of the structural complexity to help interpret and define other potentially mineralized structures along the different vein zones.

The authors believe that the Canadian Gold Resources LTD. & Amseco Exploration, should continue follow-up exploration, drilling, metallurgical investigation and project development activities on the Property.

The mining exploration at Lac Arsenault is at an early stage of development, there is no guarantee that future work will lead to an economic viable project.

Recommendations

The recommendations aim at validating what has been identified with metallurgical testing, bulk sample application and thereafter could be followed by additional drilling. It could in a subsequent phase test other known occurrences, to test new target areas, and to continue assess the overall potential of the Property. The second phase drilling program designed using the drillholes database and also surface samples taken from the exposed veins by Claude Duplessis Eng., (Independent qualified person) during the site visit. Four surface samples returned greater than 6 g/t Au, three were greater than 260 g/t Ag, and the highest value was 17.43 g/t Au from Baker vein (sample 21908A) also containing 204 g/t Ag. The authors recommend also a trenching program and surface exploration mainly in the area with gold potential (Table 16).

Should the client elect to go for a bulk sample underground, authors recommend geotechnical drillholes at the property and the following table shows the recommended works.

Table 1: Estimation of the exploration program at the Lac Arsenault property

Recommended works	All included cost (\$CAD)
-------------------	---------------------------

Collar survey/topographic surface/density measurement	10,000
Metallurgical test for recovery	50,000
Environmental tests	50,000
Drone LIDAR survey	75,000
Surface exploration works - regular channel samples	50,000
Estimation of Mineral resources (update NI43-101 technical report); assistance in press release and act as independent QP	75,000
Application for Bulk samples & reclamation plan	100,000
Total	410,000

- The author suggests specific gravity measurement on sample program which should allow conversion at adequate estimation of tonnage.
- A collars survey using station total is needed for the 2021 drill holes.
- A topographic survey on all the property is highly recommended.
- A hydrogeological study is recommended to reduce risks associated with ground water and better define the water management strategy.
- A geotechnical data collection program is recommended if Underground bulk sample is selected to include more parameters (fractures, joints, shearing, roughness, weathering, alteration, etc).
- A metallurgical tests program will be required at the Lac Arsenault zone.
- More exploration works on the corridors of deformation oriented NNE.

The authors believe that the recommended work program and proposed expenditures are appropriate and believe that the estimated budget reasonably reflects the type and amount of contemplated activities.

2 Introduction (Item 2)

2.1 Overview

This technical report, completed in accordance with National Instrument (NI) 43-101 guidelines, has been prepared for Amseco Exploration Ltd and Canadian Gold Resources Ltd.

Amseco Exploration Ltd. (the “**Company**” or “**Amseco**”) entered into a share exchange agreement with Canadian Gold Resources Ltd. (“**Canadian Gold**”) and the shareholders of Canadian Gold (the “**Canadian Gold Shareholders**”), dated May 31, 2024 (the “**Agreement**”) in respect of a proposed share acquisition of Canadian Gold (the “**Transaction**”). It is anticipated that the Proposed Transaction will constitute a “Reverse Takeover” of Amseco in accordance with Policy 5.2 – *Changes of Business and Reverse Takeovers* of the Exchange.

Pursuant to the Agreement, in consideration for the acquisition of all the issued and outstanding common shares in the capital of Canadian Gold (the “**Canadian Gold Shares**”), the Company will issue 20,000,000 common shares in the capital of the Company (the “**Amseco Shares**”) on a post-consolidation basis, at a deemed price of \$0.25 per Amseco Share. The Transaction will result in the reverse takeover of Amseco by Canadian Gold. As such, Canadian Gold will become a wholly-owned subsidiary of Amseco and Amseco will be the exclusive owner of the Lac Arsenault property. Concurrent with the closing of the Transaction, Amseco will change its name to “Canadian Gold Resources Ltd.” or a similar name.

The company Canadian Gold Resources Ltd (‘the issuer’) is a private company created in 2011 and registered with a corporate number 798524-0.

The aim of this technical report is to present a summary of the technical information relating to the exploration activities, carried out on the Lac Arsenault project.

The authors are from GoldMinds Geoservices an independent exploration and mining consulting firm based in Québec City, Québec (Canada).

2.2 Report Responsibility and Qualified Persons

The Technical Report was prepared by Mr. Merouane Rachidi, P. Geo., Ph.D., and Claude Duplessis Eng., from GoldMinds Geoservices for the Canadian Gold Resources LTD. in compliance with the disclosure requirements of the Canadian National Instrument 43-101 (NI 43-101).

The Report has been prepared conform to the format and content required under the National Instrument 43-101 (“NI43-101”) regulations of the Canadian Securities Administrators, including Form 43-101F1, and other related guidelines.

Unless otherwise stated, information and data contained in this report or used in its' preparation has been provided by the issuer.

The Qualified Persons for preparation of this report are Merouane Rachidi, P.Geo., and Claude Duplessis, Eng., of GoldMinds Geoservices Inc.

Claude Duplessis has visited the Property from the 28 to 30 July, 2021 and June 11th to June 13th 2024, while M. Rachidi did not visit the Property.

2.3 Sources of information

As part of the current mandate, the independent qualified persons (QPs) as defined by NI 43-101 have reviewed the following with respect to the Lac Arsenault Property: claims and their status recorded in GESTIM (the Government of Quebec's online claim management system); agreements and technical data supplied by 1844 resources Inc. geologist (the previous owner of the lac Arsenault property); public sources of relevant technical information available through SIGÉOM (the Government of Quebec's online warehouse for assessment work) and GESTIM (the Government of Quebec's online claim management system).

The authors have sourced the information for the Technical Report from the collection of reports listed in Item 27 – References.

The authors believe that the information used to prepare the Technical Report is valid and appropriate considering the status of the project and the purpose for which the report is prepared. The authors have no known reason to believe that any of the information used to prepare the Technical Report is invalid or contains misrepresentations.

The QPs does not have, nor has he previously had, any material interest in the issuer or its related entities. The relationship with the issuer is solely a professional association between the issuer and the independent consultant.

2.4 Currency, Units, Abbreviations and Definitions

All currency amounts are stated in Canadian dollars. Quantities are stated in both imperial and SI units (Canadian and international practice), including metric tonnes (tonnes, t) and kilograms (kg) for weight, kilometres (km) or metres (m) for distance, hectares (ha) for area, grams (g) and grams per metric tonne (g/t) or parts per billion (ppb) grams per metric tonne (g/t), (Table 2).

Table 2 : List of abbreviations

Unit or Term	Abbreviation or Symbol
American dollars	US\$ or USD
Canadian dollar	\$, CA\$, CAD
centimetre	cm
chalcopyrite	cpy

Unit or Term	Abbreviation or Symbol
carbon-in-pulp	CIP
copper	Cu
cubic metre	m ³
decametre	dm
degree Celsius	°C
diamond drill hole	DDH
electromagnetic	EM
foot	ft, '
gold	Au
gram	g
gram per cubic centimetre	g/cm ³
gram per metric ton	g/t
hectare	ha
inch	in, "
induced polarization	IP
inductively coupled plasma	ICP
iron	Fe
joint venture	JV
kilogram	kg
kilometre	km
magnetometer, magnetometric	Mag
metre	m
metres above sea level	masl
metric ton (tonne)	t
micron (micrometre)	µm
millimetre	mm
million	M
million metric tons	Mt
million ounces	Moz
million years	Ma
Ministère de l'Énergie et des Ressources Naturelles du Québec	MERN
Ministère des Forêts, de la Faune et des Parcs	MFFP
Ministère de l'Environnement et de la Lutte contre les changements climatiques	MELCC
National Instrument 43-101	NI 43-101, 43-101
net smelter return	NSR
nickel	Ni
ounce per short ton	oz/st
part per billion	ppb
part per million	ppm
pyrite	py
pyrrhotite	po
short ton	st, ton
silver	Ag
thousand	k
thousand ounces	koz
tonnes (metric tons) per day	tpd
troy ounce	oz
tungsten	W
underground	UG, U/G

Unit or Term	Abbreviation or Symbol
versatile time domain electromagnetic	VTEM
volcanogenic massive sulphide	VMS
zinc	Zn
Percent sign	%
Degree	°
Degree Celsius	°C

2.5 Disclaimer

There are no mineral resources estimation in this report. The information and comments presented in this Technical Report reflect the author’s best judgement in light of the information available.

3 Reliance on other experts (Item 3)

This report has been prepared by Mr. Merouane Rachidi, P.Geo., and Mr. Claude Duplessis, Eng., from GoldMinds Geoservices Inc. for Amseco Exploration Ltd and Canadian Gold Resources LTD.

The authors are not experts in legal and rely on legal documents submitted in the agreement prepared by their respective lawyers. It applies in summary and Item 4.

4 Property description and location (Item 4)

4.1 Location

The Lac Arsenault property located within the province of Québec, Gaspé Peninsula, southwest of the Gaspé municipality (Figure 1). The Lac Arsenault property is centered at 335612 mE and 5360068 mN within National Topographic System (NTS) map sheets 22A06. The locations in this report are referenced to NAD 83 UTM coordinates zone 20 (Figure 1 and Figure 2).

The Lac Arsenault property, the subject of this report covers an approximate total area of 4175.57 hectares (Table 3).

Table 3, lists the status of these cells which include the claim number, the expiry date, the area in hectare, the excess work credit and the required work and fees.

This Report is intended to be used by Amseco Exploration Ltd. and Canadian Gold Resources LTD. in the reverse take over (RTO) process as a Technical Report with Canadian Securities Regulatory Authorities pursuant to provincial securities legislation. In addition, this report is for use by Canadian authorities. Except for the purposes contemplated under provincial securities laws, any other use of this Report by any third party is at the party’s sole risk.

There is requirement of 87,600\$ exploration spending for work requirement and there is 622,865.30\$ in Excess of work which can be applied for renewals.



Figure 1: General location of the Lac Arsenault property

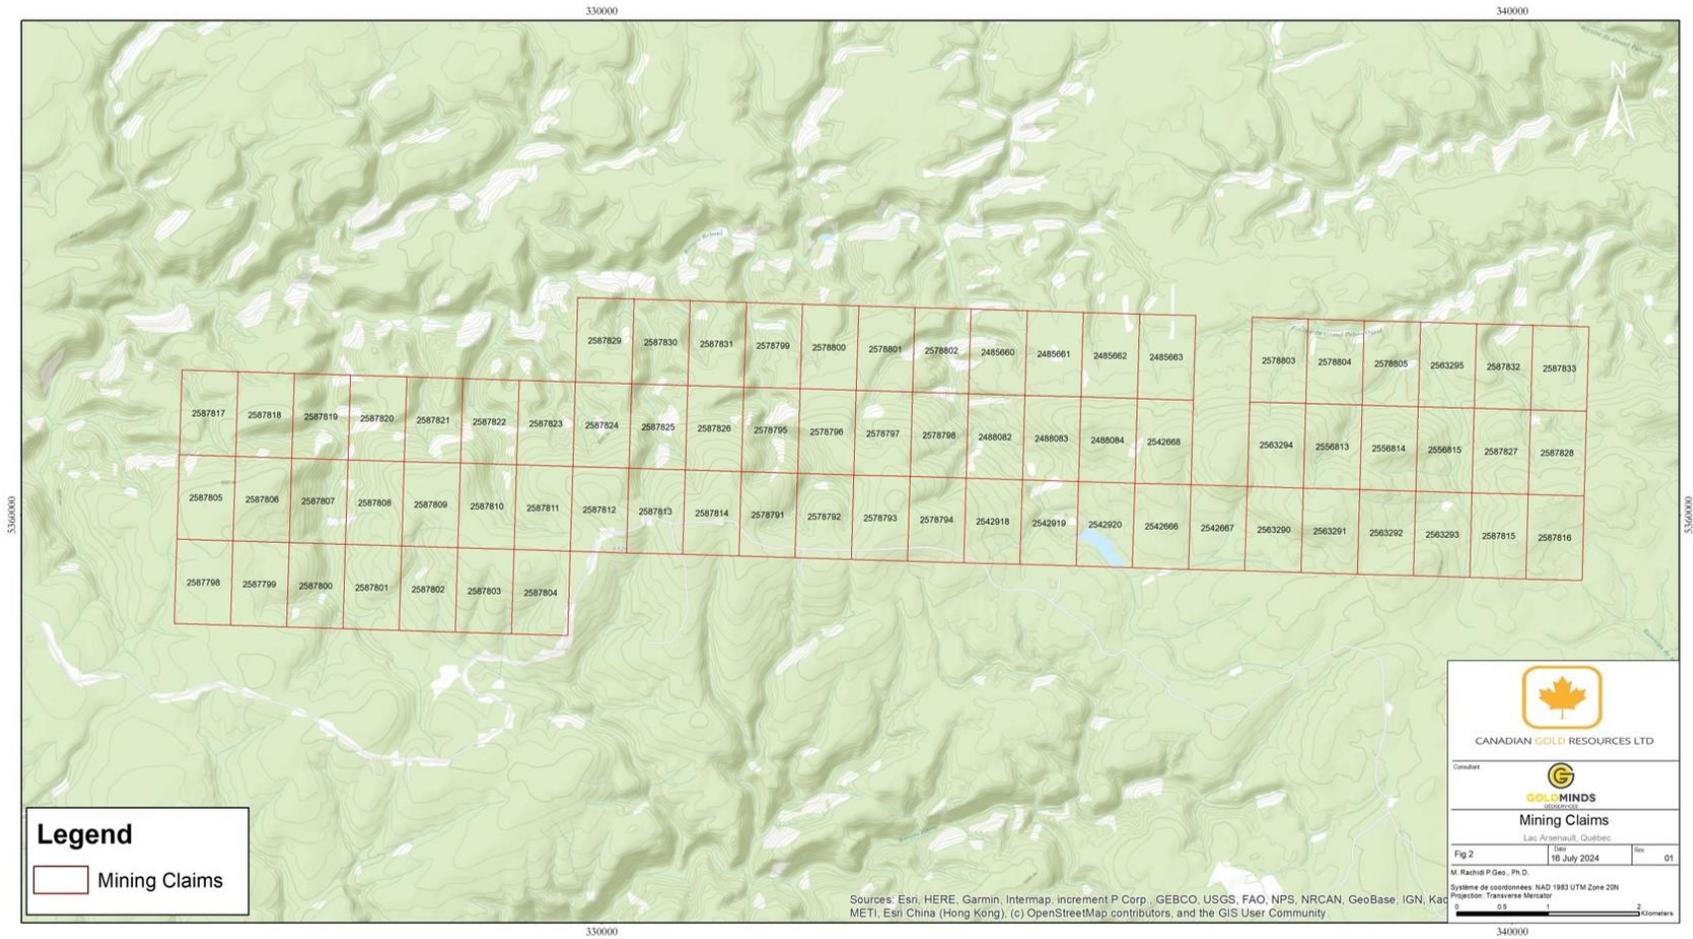


Figure 2: The mining claims location at Lac Arsenault property (July, 2024)

Table 3 : Mining title list of the Lac Arsenault Property

Type of title	No titre	Expiry date	Area (Ha)	Excess Work \$	Required Work \$	Owner
CDC	2587813	2025-11-11	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578796	2025-09-02	57.2	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587803	2025-11-11	57.22	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587810	2025-11-11	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578792	2025-09-02	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587816	2025-11-11	57.2	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2563295	2025-04-28	57.18	198	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587829	2025-11-11	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587831	2025-11-11	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578799	2025-09-02	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578800	2025-09-02	57.19	31.08	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578801	2025-09-02	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578802	2025-09-02	57.19	31.07	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2485660	2026-03-21	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2485661	2026-03-21	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2485662	2026-03-21	57.19	1662.68	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2485663	2026-03-21	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578803	2025-09-02	57.18	198	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578804	2025-09-02	57.18	198	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578805	2025-09-02	57.18	198	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587832	2025-11-11	57.18	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587833	2025-11-11	57.18	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578798	2025-09-02	57.2	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2488082	2026-04-04	57.2	123406.26	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2488083	2026-04-04	57.2	213207.13	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2488084	2026-04-04	57.19	191570.66	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2563294	2025-04-28	57.19	198	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2556813	2026-02-27	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2556814	2026-02-27	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2556815	2026-02-27	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587827	2025-11-11	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587828	2025-11-11	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587817	2025-11-11	57.2	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587819	2023-11-11	57.2	115.95	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587820	2025-11-11	57.2	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587821	2025-11-11	57.2	79.91	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587822	2025-11-11	57.2	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587823	2025-11-11	57.2	79.91	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587824	2025-11-11	57.2	79.91	1200	Canadian Gold Resources Ltd. (105225) 100 %

Type of title	No titre	Expiry date	Area (Ha)	Excess Work \$	Required Work \$	Owner
CDC	2587825	2025-11-11	57.2	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587826	2025-11-11	57.2	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578795	2025-09-02	57.2	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578797	2025-09-02	57.2	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587806	2025-11-11	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587807	2025-11-11	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587808	2025-11-11	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587809	2025-11-11	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587811	2025-11-11	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587812	2025-11-11	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587814	2025-11-11	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578791	2025-09-02	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578793	2025-09-02	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587798	2025-11-11	57.22	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587799	2025-11-11	57.22	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587800	2025-11-11	57.22	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587801	2025-11-11	57.22	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587802	2025-11-11	57.22	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587804	2025-11-11	57.22	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2563293	2025-04-28	57.2	198	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587815	2025-11-11	57.2	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2563292	2025-04-28	57.2	198	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2578794	2025-09-02	57.21	31.08	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2563290	2025-04-28	57.2	198	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2563291	2025-04-28	57.2	198	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587805	2025-11-11	57.21	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587818	2025-11-11	57.2	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2587830	2025-11-11	57.19	0	1200	Canadian Gold Resources Ltd. (105225) 100 %
CDC	2542666	2025-08-26	57.2	17851.46	1200	1844 Resources inc. (101404) 100 %
CDC	2542919	2025-08-29	57.2	198	1200	1844 Resources inc. (101404) 100 %
CDC	2542668	2025-08-26	57.19	67481.02	1200	1844 Resources inc. (101404) 100 %
CDC	2542918	2025-08-29	57.2	198	1200	1844 Resources inc. (101404) 100 %
CDC	2542920	2025-08-29	57.2	4861.18	1200	1844 Resources inc. (101404) 100 %
CDC	2542667	2025-08-26	57.2	198	1200	1844 Resources inc. (101404) 100 %

The 6 claims owned by 1844 in the list are being transferred and GESTIM has not been updated yet.

4.2 Ownership, Royalties and Agreements

The mining claims (73) concerned by this technical report are 100% owned by Canadian Gold. Ltd.

An agreement was signed in January 27, 2023 between 1844 Resources Inc. (The Vendor) and Canadian Gold Resources Ltd. (The Purchaser) The Purchase price for the mining claims is six hundred thousand Canadian dollars (\$600,000.00CAD).

- One hundred thousand Canadian Dollars (\$100,000.00CAD) was paid in cash to 1844 Resources Inc.
- From the treasury of the purchaser having a value of Five Hundred Thousand Canadian dollars (\$500,000.00CAD) that has been provided to the Vendor.

The Vendor is entitled to a one percent (1%) NSR and the Purchaser shall have the right to repurchase the NSR for Five Hundred Thousand Canadian Dollars (\$500,000.00CAD).

The mining claims have been transferred to The Canadian Gold Resources LTD. when the payments were fully made.

The mining titles have been verified and validated using "GESTIM" the official and public mining title management website operated by the "Ministère de l'Énergie et des Ressources Naturelles du Québec".

The authors are not aware of any environmental liabilities on the claims.

The AMSECO transaction

Amseco Exploration Ltd. (the "**Company**" or "**Amseco**") entered into a share exchange agreement with Canadian Gold Resources Ltd. ("**Canadian Gold**") and the shareholders of Canadian Gold (the "**Canadian Gold Shareholders**"), dated May 31, 2024 (the "**Agreement**") in respect of a proposed share acquisition of Canadian Gold (the "**Transaction**"). It is anticipated that the Proposed Transaction will constitute a "Reverse Takeover" of Amseco in accordance with Policy 5.2 – *Changes of Business and Reverse Takeovers* of the Exchange.

Pursuant to the Agreement, in consideration for the acquisition of all the issued and outstanding common shares in the capital of Canadian Gold (the "**Canadian Gold Shares**"), the Company will issue 20,000,000 common shares in the capital of the Company (the "**Amseco Shares**") on a post-consolidation basis, at a deemed price of \$0.25 per Amseco Share. The Transaction will result in the reverse takeover of Amseco by Canadian Gold. As such, Canadian Gold will become a wholly-owned subsidiary of Amseco and Amseco will be the exclusive owner of the Lac Arsenault property. Concurrent with the closing of the Transaction, Amseco will change its name to "Canadian Gold Resources Ltd." or a similar name.

The company Canadian Gold Resources Ltd (“the issuer”) is a private company created in 2011 and registered with a corporate number 798524-0.

4.3 Quebec Mining Law

Under the Québec Mining law, a claim is the only exploration title that can be granted by the government for the exploration of mineral substances on lands in the public domain. It can be obtained:

- By map designation, henceforth the principal method for acquiring a claim.
- By staking on lands that have been designated for this purpose.

A claim is a mineral right that gives its holder a two-year exclusive right to explore a designated territory for any mineral substances that are part of the public domain with the exception of:

- Petroleum, natural gas and brine;
- Sand other than silica sand used for industrial purposes, gravel, common clay used in the manufacture of clay products, and other mineral substance found in its natural state as a loose deposit, as well as inert mine tailings used for construction purposes;
- On any part of land that is also subject to an exploration licence for surface mineral substances or an exclusive lease to mine surface mineral substances, every other surface mineral substance.

The claim holder may renew the title for a two-year period. To do so they must: submit an application for renewal at least 60 days prior to the claim expiry date; pay the required fees, which vary according to the surface area of the claim, its location, and the date the application is received.

Each claim provides access rights to a parcel of land on which exploration work may be performed. However, the claim holder cannot access land that has been granted, alienated or leased by the State for non-mining purposes, or land that is the subject of an exclusive lease to mine surface mineral substances, without first having obtained the permission of the current holder of these rights.

5 Accessibility, climate, local resources, infrastructures and physiography (Item 5)

5.1 Accessibility

The Lac Arsenault property is located near the boundary of Honorat and Weir Townships approximately twenty-five kilometers north of the village of Paspebiac (Figure 3).

The claims group can be reached in approximately 1 hour from Paspébiac town (Figure 3). From Paspébiac town head north to the small farming community saint-Jogues, and then travelling over jeep road (26 km) to the small Lac Arsenault.

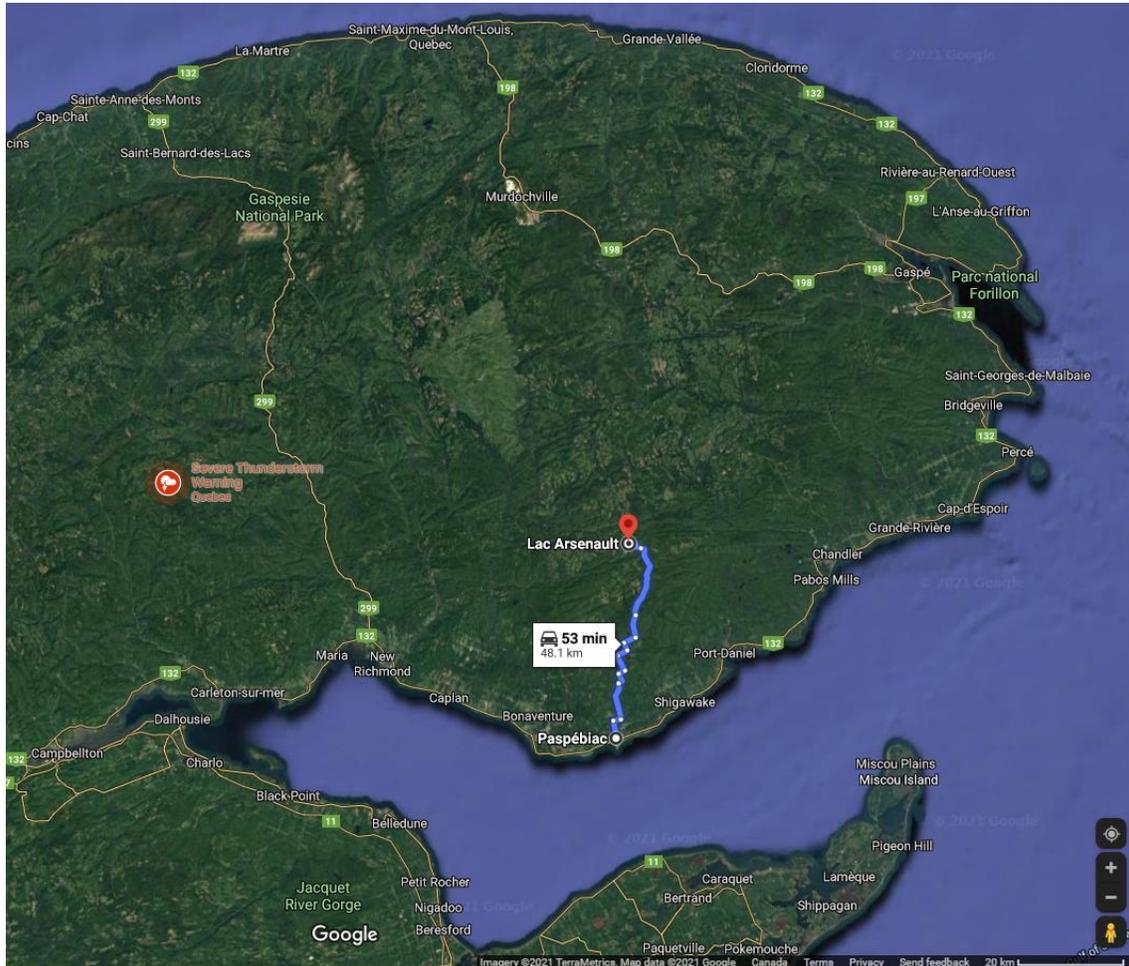


Figure 3 : The property access road from Paspébiac (Google Map, source)

Alternate access is north from the village of Bonaventure approximately thirty-five kilometers to a new road installed by the Minister of natural Resources. This road intersects the Lac Arsenault Road about two kilometers south of Lac Arsenault. Total distance from Bonaventure is about 58 kilometers.

5.2 Climate

The interior climate of the Gaspé Peninsula is of the boreal type. Relief and maritime influence are responsible for strong differences in temperature and precipitation. The climate in the Bonaventure city (disponible climate data close from the property) is cold in the winter and temperate in the summer with a significant rainfall (Figure 4 and Figure 5). The average annual temperature is 4.3°C

(39.7 °F). The precipitation is about 1334 mm per year. The driest month is February with 80 mm of rainfall. Most of the precipitation here falls in October averaging 145 mm.

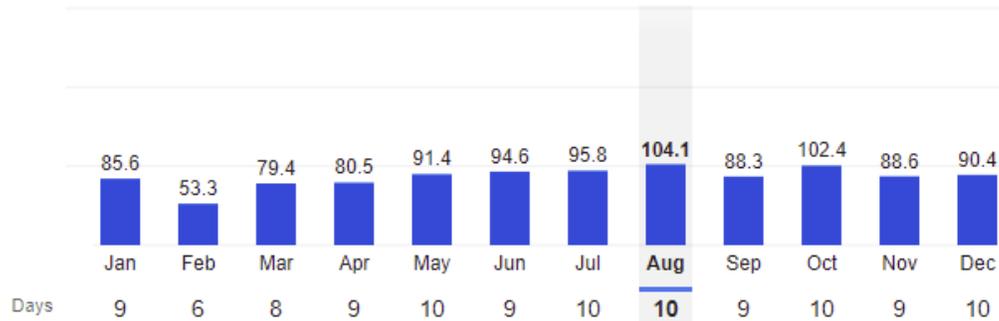


Figure 4 : Monthly precipitation data (millimetres) at Bonaventure

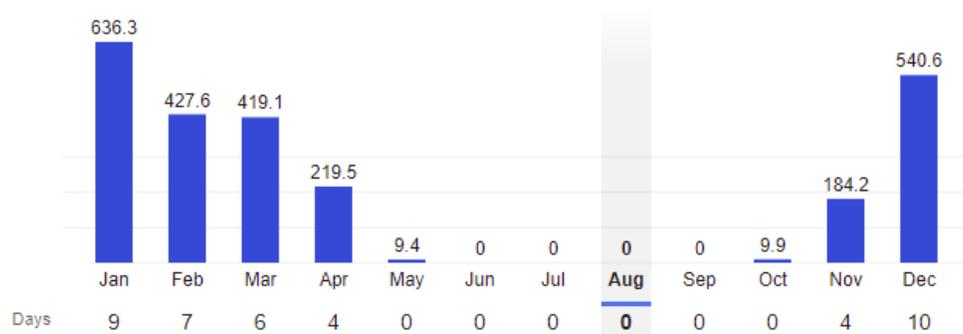


Figure 5 : Monthly snowfall (millimetres) data at Bonaventure

Spring conditions occur between the months of April and June and consist of warming temperatures. Summer starts at the end of June and ends in September. The warmest month of the year is July, with an average temperature of 18.5 °C (65.3 °F), (Figure 6). January is the coldest month, with temperatures averaging -10.6 °C (13.0 °F).

Temperatures (°C)

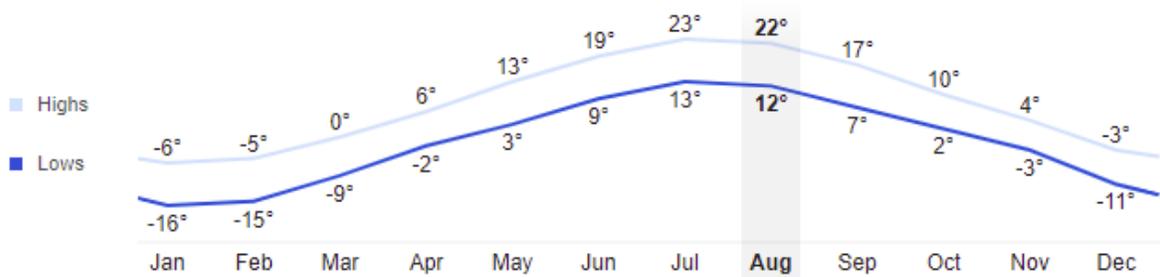


Figure 6 : Monthly temperatures data (°C) at Bonaventure

The difference in precipitation between the driest month and the wettest month is 65 mm. Throughout the year, temperatures vary by 29.1 °C. The month with the highest relative humidity is December (77.66 %). The month with the lowest relative humidity is March (72.14 %), (Table 4).

The month with the highest number of rainy days is July (12.53 days). The month with the lowest number of rainy days is February (9.60 days).

Table 4 : Weather averages by Month at Bonaventure

	January	February	March	April	May	June	July	August	September	October	November	December
Avg. Temperature °C (°F)	-10.6 °C (13) °F	-9.7 °C (14.5) °F	-4.8 °C (23.4) °F	1.2 °C (34.2) °F	8.2 °C (46.7) °F	14.3 °C (57.7) °F	18.5 °C (65.3) °F	18.1 °C (64.6) °F	14 °C (57.2) °F	7.3 °C (45.2) °F	0.8 °C (33.4) °F	-6.2 °C (20.8) °F
Min. Temperature °C (°F)	-13.9 °C (7) °F	-13 °C (8.5) °F	-8.2 °C (17.3) °F	-2 °C (28.5) °F	4.5 °C (40.1) °F	10.8 °C (51.5) °F	15.3 °C (59.5) °F	15 °C (59) °F	11 °C (51.7) °F	4.9 °C (40.8) °F	-1.5 °C (29.3) °F	-9.1 °C (15.7) °F
Max. Temperature °C (°F)	-6.7 °C (19.9) °F	-5.8 °C (21.5) °F	-0.9 °C (30.4) °F	4.9 °C (40.9) °F	12.6 °C (54.8) °F	18.3 °C (65) °F	22.2 °C (72) °F	21.6 °C (71) °F	17.7 °C (63.8) °F	10.3 °C (50.5) °F	3.5 °C (38.3) °F	-3.1 °C (26.4) °F
Precipitation / Rainfall mm (in)	99 (3.9)	80 (3.1)	100 (3.9)	109 (4.3)	118 (4.6)	107 (4.2)	103 (4.1)	100 (3.9)	120 (4.7)	145 (5.7)	134 (5.3)	119 (4.7)
Humidity(%)	75%	74%	72%	74%	74%	74%	76%	76%	75%	75%	77%	78%
Rainy days (d)	8	7	8	9	9	9	9	8	8	9	9	9
avg. Sun hours (hours)	4.2	5.4	6.3	7.4	8.8	10.0	10.3	9.4	7.9	5.7	4.4	3.7

5.3 Local resources

Mining in the region has existed for a century with Gaspé Copper in Murdochville. The mining manpower is available in the region (Ste-Anne-des-Monts, Gaspé, Chandler and Bonaventure). There is enough water in the area (Lac Arsenault) to supply exploration and mining activities.

Basic supplies such as food and limited accommodation are available at Paspébiac town. The largest nearby community is Bonaventure, located 58 km south of the property. The special items can be purchased from Bonaventure town.

The field exploration operating season is possible on a full year basis, however, due to additional costs associated with road maintenance and reduced efficiency of field work in winter, the best exploration time covers 8 Months from April to November.

5.4 Infrastructure

The property is easily accessible by a well-maintained gravel road from Paspébiac town (48 km, Figure 7). The town is noted for the Banc de Pêche de Paspébiac, a large sandbar jutting out into the bay which has been designated a National Historic Site of Canada. Services available include meals and lodgings, outfitting, and purchase of basic supplies including fuel.

The property is also close to the Bonaventure city (58 km) with a regional airport with regularly scheduled flights to and from Montreal, and also acts as a hub for flights to the Gaspé Peninsula. The Bonaventure city has a numerous tourist camps catering mainly to hunters and fishermen.

The property is at the North from Port-Daniel (73 km) which is the sea-port on the Bay of Chaleur.

5.5 Physiography and vegetation

The area has accentuated topography with an average of around 400m and the maximum of around 560m. The area is cut by deep valleys with small rivers and creeks.

The hydrography is controlled by a drainage network which flow from the north to the south belongs to the Rivière Port-Daniel to the sea of Baie des chaleurs.

The vegetation cover is very dense along the rivers and becomes more and sparser as one rises in altitude. The forest cover consists of coniferous and mixed-wood forests characterizing the boreal type vegetation of the Gaspé Peninsula.



Figure 7 : Lac Arsenault property showing boreal type vegetation(looking NE)

The property is on public land surface rights are government owned. The claims area are sufficient to sustain a potential mining project.

6 History (Item 6)

1900-1910 The first exploration work at the Lac Arsenault property were done by MacLaurin Brothers of Montréal in the Weir serpentinites to verify their Asbestos content. The result of their work conclude that the prospect is commercially impossible related to the short fibers and the insufficient quantities.

1941 the office of Québec mines (Bureau des mines du Québec) in its search for strategic minerals of war did some geological works by H.W. McGerrigle to explore the serpentinite belt in order to establish its potential in Chromium. H.W. McGerrigle describes that the Chromium appears as grains within the serpentinite with more marked local concentrations.

1942 The Chromium Mining and Smelting Corporation options the majority of the claims. The trenches and the core drillings revealed some chromite horizons which could reach about ten feet in width. Due to insufficient tonnage and location, the site did not offer an economically profitable character.

1946 Boulders containing gold, silver and the sulphides sphalerite, galena, arsenopyrite and pyrite were discovered by prospector, Walter Baker while on a moose hunting holiday at Lac Arsenault.

1966 Vesper Mines Ltd. explored the area, conducting geological mapping, geochemical sampling and a magnetic survey over the property.

1971 J.G. Mayman for Impérial Oil Entreprises Ltd. done two magnetic profiles.

1973 Z. Hazan for Impérial Oil Entreprises Ltd, following a summary study recommends detailed mapping and soil sampling.

1973-1974 Aggressive Mining drilled the initial drill hole on the project in 1973. A mineralized vein intersected in the diamond drilling contained 1.7 feet of zone that assayed 0.28 oz. Au/ton and 2.96 oz Ag/ton. Imperial Oil Ltd optioned the claims in 1974 and spent \$477,675 on the property. Their exploration consisted of geological mapping, ground geochemistry, geophysics and diamond drilling. A total of 8963 feet of diamond drilling was cored during this phase of the exploration. The drilling by Imperial Oil Ltd. explored several gold bearing quartz veins.

1975-1978 Imperial Oil and Esso minerals started an exploration program that consist of geological mapping of the area, geochemical and geophysical surveys, trenched geochemical anomalies where possible and drilled 34 holes for a total of 8,955 feet.

Work by Esso Resources Canada outlined geological historical resources* of 40,000 tonnes, grading 15.43 g/t Au, 197.00 g/t Ag, 6.6% Pb and 3.5% Zn in the three veins exposed on surface, Baker, Mesereau and Line 4W (DV-85-08 p.1).

* The estimates presented above are treated as historic information and have not been verified or relied upon for economic evaluation by the Issuer or the authors. This historical mineral resources do not refer to any category of sections 1.2 and 1.3 of the NI-43-101 Instrument such as mineral resources or mineral reserves as stated in the CIM Definition Standards on Mineral Resources and Mineral Reserves 2019.

1980 Le Groupe Platine de la Fosse takes possession for several years of the area with ophiolitic mixture. No statutory work was filled. Several holes were drilled at the western part of the ophiolitic mixture.

1985-1987 Imperial Oil Ltd. optioned the claims to DsOro Resources Inc in 1985 and following limited orientation surveys the property was optioned to Mondor Explorations Inc. for whom the 1986 field programme was conducted.

Three zones were the subject of the drilling program, Baker, Mersereau, L-4W and Marleau. The 1986 exploration programme discovered a new Au bearing zone intersected by hole 86-24 (Marleau vein) with an assay of 0.36 oz Au/t over 5.2 feet (GM45384).

1990 M. Goulet carry out some exploration work in the western part of the property. His work includes a surface sampling (103 soil samples) for geochemical analysis, magnetometric and electromagnetic surveys, and detailed geological mapping at a scale of 1:2500 complemented by 79 litho-geochemical samples. This work revealed anomalous gold-bearing sectors (100 to 8500 ppb Au in the soil), in elements of the platinum group "EGP" and the update of three massive chromite horizons exposed in an old trenches.

1991 - 1992 M. Goulet continued his exploration work by taking 411 soil samples and carrying out detailed geological mapping. This work confirms the extent of three anomalous gold bearing sectors (zone A, B and C) linked to breccia and to the listwaenite. The results obtained from this work made it possible to specify the location and orientation of the trench and the blasting zones. A total of 172 rock samples were analyzed. Anomalous gold grades over a width of 30 meters and reaching 1.3 g/t were obtained.

In 1992 a total of 180 soil samples were analyzed and allow the increase of the interest zone and to identify almost the three gold anomalous patterns.

1995 M. Goulet and J.M. Pronovost carry out a geophysical survey of induced polarization along 7.1 km, a detailed geological mapping 8 trenches and three diamond drill holes.

1996 Peter J. Hawley in report dated Feb 7. 1996, states that the Arsenault Prospect contains 220,042.52 Short tons at 0.307 oz/ton Au. (GM 55619) * The estimates presented above are treated as historic information and have not been verified or relied upon for economic evaluation by the Issuer or the authors. This historical mineral resources do not refer to any category of sections 1.2 and 1.3 of the NI-43-101 Instrument such as mineral resources or mineral reserves as stated in the CIM Definition Standards on Mineral Resources and Mineral Reserves 2019.

1997 Campbell and G. Henriksen cut 8.9 miles of lines on the northern 3 claims of the originally staked 9 claims and the southern regions of the 5 additional claims staked in 1994. Where possible the old Esso Minerals-Mondor Explorations grid references were used. 8.4 miles of magnetic and VLF-electromagnetic surveying was completed over the newly cut lines and reconnaissance prospecting, mapping and rock sampling (3 samples) was performed. Twelve old trenches were found and 3 electromagnetic anomalies and numerous magnetic anomalous zones were delineated. A \$ 93,000 Phase 1 exploration program of linecutting, geophysical surveying, prospecting, mapping, stripping, trenching, washing, sampling, compilation and report preparation, and a \$ 330,000 Phase 2 program of diamond drilling, were recommended by geologist G.N. Henriksen.

2000 Scorpio Mining Corporation completed a program of ground exploration designed to better define and extend the limits of the mineralized vein systems and to discover new polymetallic and Au/Ag bearing veins and quartz rubble/float by studying the previously obtained exploration results, especially the 1987 I. P. data; completing the linecutting (20.19 miles), total field magnetic (3.93 miles), VLF-EM (3.8 miles) and HLEM (13.32 miles) surveying, geochemical soil (72 samples) and rock (190 samples) sampling, prospecting and geological mapping on selected areas in order to provide total coverage across the property; stripping/excavating, power washing and chip sampling the exposed mineralized quartz veins (Baker, Marleau Mersereau and Greek); and trenching areas containing quartz float/rubble and geophysical anomalies (24 trenches).

2000 Scorpio Mining Corporation staked 4 claims (5255640 to 5255643) contiguous with the eastern 5 claims of the 14 acquired in 1992 and 1994. These 4 claims cover I.P. and geochemical anomalies and an old trench.

2001 Scorpio Mining Corporation staked an additional 12 claims (5262369 to 5262380), contiguous to the east and to the south, forming a 30 claims rectangular shaped block.

2001 Two diamond holes of 100 feet each were drilled on the A and B gold zones, to verify the presence of north-south structures within the Nadeau fault. Six geochemical soil samples and a trench was dug on the extension of the massive chromite vein of the old AT4 trench. A total 61 core samples and 5 samples of the overburden samples were analyzed at the Bondar-Clegg laboratory at Val d'Or.

2005 Ressources Appalaches concluded with Scorpio Mining Corporation the option to acquire a 51% interest in the Lac Arsenault property. The property includes 30 contiguous claims for a total area of 480 hectares. Exploration work was carried out in the fall 2005 by Ressources Appalaches in order to assess the gold potential of the property. This exploration work consist of 29 holes mainly focused on the Baker and Mersereau veins to verify their gold content as well as their extensions. The best drilling results come from the Baker vein with 7.2 g/t Au over 3 m and 14.7g/t Au over 0.7 m, respectively in drill holes F05-01 and F05-07. The Mersereau vein obtains a maximum grade of 6.74 g/t Au over 40 cm in hole F05-17 (Hupé and Baker 2007). A total of 7 trenches (105 metres) were excavated using a mechanical shovel. These trenches were made in order to expose the

Mersereau vein and to verify their extensions (Hupé and Baker 2007). The best result from Mersereau vein is 17.9 g/t Au and 201 g/t Ag over 30cm (Hupé and Baker 2007).

Work from 1844 (previous owner) could appear here, however author kept them in their respective sections (exploration, drilling) with the mention historical.

Historical information on potential target:

1975-1978 Work by Esso Resources Canada outlined geological historical resources* of 40,000 tonnes, grading 15.43 g/t Au, 197.00 g/t Ag, 6.6% Pb and 3.5% Zn in the three veins exposed on surface, Baker, Mesereau and Line 4W (DV-85-08 p.1).

1996 Peter J. Hawley in report dated Feb 7. 1996, states that the Arsenault Prospect contains 220,042.52* Short tons at 0.307 oz/ton Au. (source GM 55619)

*** The estimates presented above are treated as historic information and have not been verified or relied upon for economic evaluation by the Issuer or the authors.**

Cautionary statement: The historical mineral resources do not refer to any category of sections 1.2 and 1.3 of the NI-43-101 Instrument such as mineral resources or mineral reserves as stated in the CIM Definition Standards on Mineral Resources and Mineral Reserves 2019. The work has been prepared by a world renown geologist based in Val d'Or. Canadian Gold management had a chance to talk to Mr. Hawley. At this date the supporting documents were not retrieved.

With the site visit and extent of exposed mineralisation and historical drill hole intervals, the historical estimates are relevant and should be considered relevant historical estimates without being considered as current obviously. More works are required to bring the estimates to NI 43-101 compliance. Diamond drilling and channel sampling could be done to verify the historical estimate.

7 Geological setting (Item 7)

7.1 Regional geology

The Lac Arsenault property is situated in a sequence of Palaeozoic metasedimentary rocks, located near the eastern end of the Aroostook-Matapedia Anticlinorium a major structural unit of the Appalachians that extends from Matapedia to Percé in Quebec (Figure 8). The Anticlinorium is bordered to the north by the Siluro-Devonian Gaspé- Connecticut Valley synclinorium, and to the south by the Siluro-Devonian Baie-des-Chaleurs synclinorium.

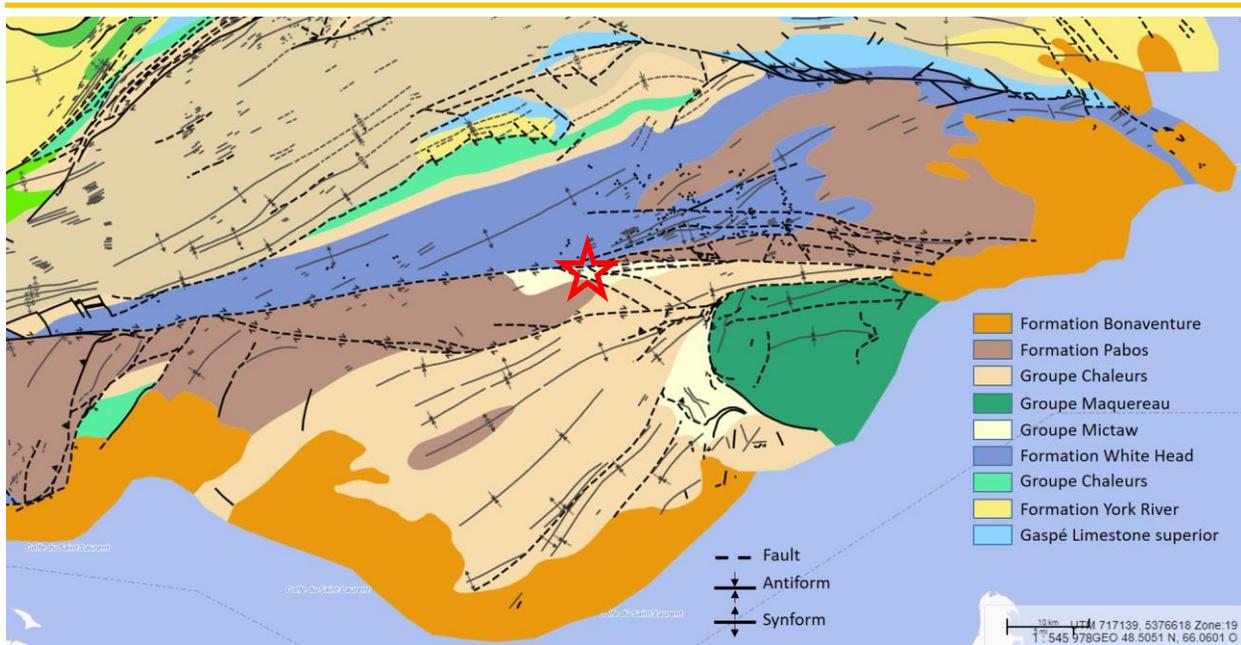


Figure 8 : Regional Geology (property red star)

The Aroostook-Percé Anticlinorium is composed of upper Ordovician to lower Silurian sedimentary rocks that have been divided in the area into four formations. They are, from the base to the top:

- The Arsenault Formation, composed of wackes and claystones with minor horizons of tuffs and silty limestones;
- The Garin Formation, composed of mudstones, siltstones, wackes, conglomerates and silty dolomitic limestones;
- The Pabos Formation, composed of mudstones, sandstones and conglomerates; and the White Head Formation, composed of calcilitites interbedded with shales, argillaceous limestones and calcarenites.
- The Arsenault and Garin formations constitute the Honorat Group and the Pabos and White Head formations the Matapedia Group.

The Anticlinorium is intersected by two major faults. The Grand Pabos Fault separates the Honorat Group clastics from Ordovician Matapedia Group limestones located to the north of the fault (Figure 8). The Garin River Fault is another major E-W fault located some five kilometres south of the Grand Pabos Fault. Secondary conjugated structures also developed during the Acadian Orogeny, such as NW-SE dextral faults linking the Grand Pabos and Garin River faults.

7.2 Property Geology

The property is situated within an assemblage of Paleozoic metasedimentary rocks along the eastern limit of the Aroostook-Matapedia Anticlinorium.

The claims are underlain by the Arsenault Formation and Garin Formation sediments of the Ordovician Honorat Group. The Arsenault Formation greywackes, claystone, tuffs and sandstones underlie around 95 % of the property and exhibit east to northeast, steeply dipping bedding which is locally overturned. A contact with the Garin Formation mudstone, siltstone, wackes, conglomerate and sandstone strikes eastnortheast across the extreme southeastern claim. The major east striking Grand Pabos Fault Zone, separating the Arsenault Formation rocks from the White Head Formation limestones, shale and siltstone of the Matapedia Group, lies just north of the property boundary. A probable secondary fault strikes 055° from the Grand Pabos Fault Zone, crossing the northeastern claims, possibly between the Baker and Mesereau Vein systems.

The mineralization in the Lac Arsenault property occurs within the Honorat Group rocks. The mineralization occurs in quartz veins systems with shears striking 012° to 040°. The veins contains minimal to 80% sulfides including arsenopyrite, galena, sphalerite, pyrite and possible argentite. Assays range for gold from trace to 1.4 oz Au/ton and trace to 25 oz Ag/ton have been recorded. Base metal content ranges from traces to 15 percent combined Pb-Zn.

The veins have sharp lateral margins in carbonatized silicified, sericite and sulphide rich Arsenault Formation metasedimentary rocks. The veins are of probable epithermal to mesothermal origin. The lack of vuggy quartz, the presence of locally abundant Pb-Zn and significant Ag suggest a deep epithermal to mesothermal origin for the veins. In addition to the known veins (Figure 9), mineralized quartz vein float of unknown origin has also been located on the property.

The mineralization is vein type, characterized by brittle deformation and occurs in competent Honorat Group sandstones and greywackes. Mineralization has not been located to date in the chemically favourable Matapedia Group limestones to the north of the Grand Pabos fault.

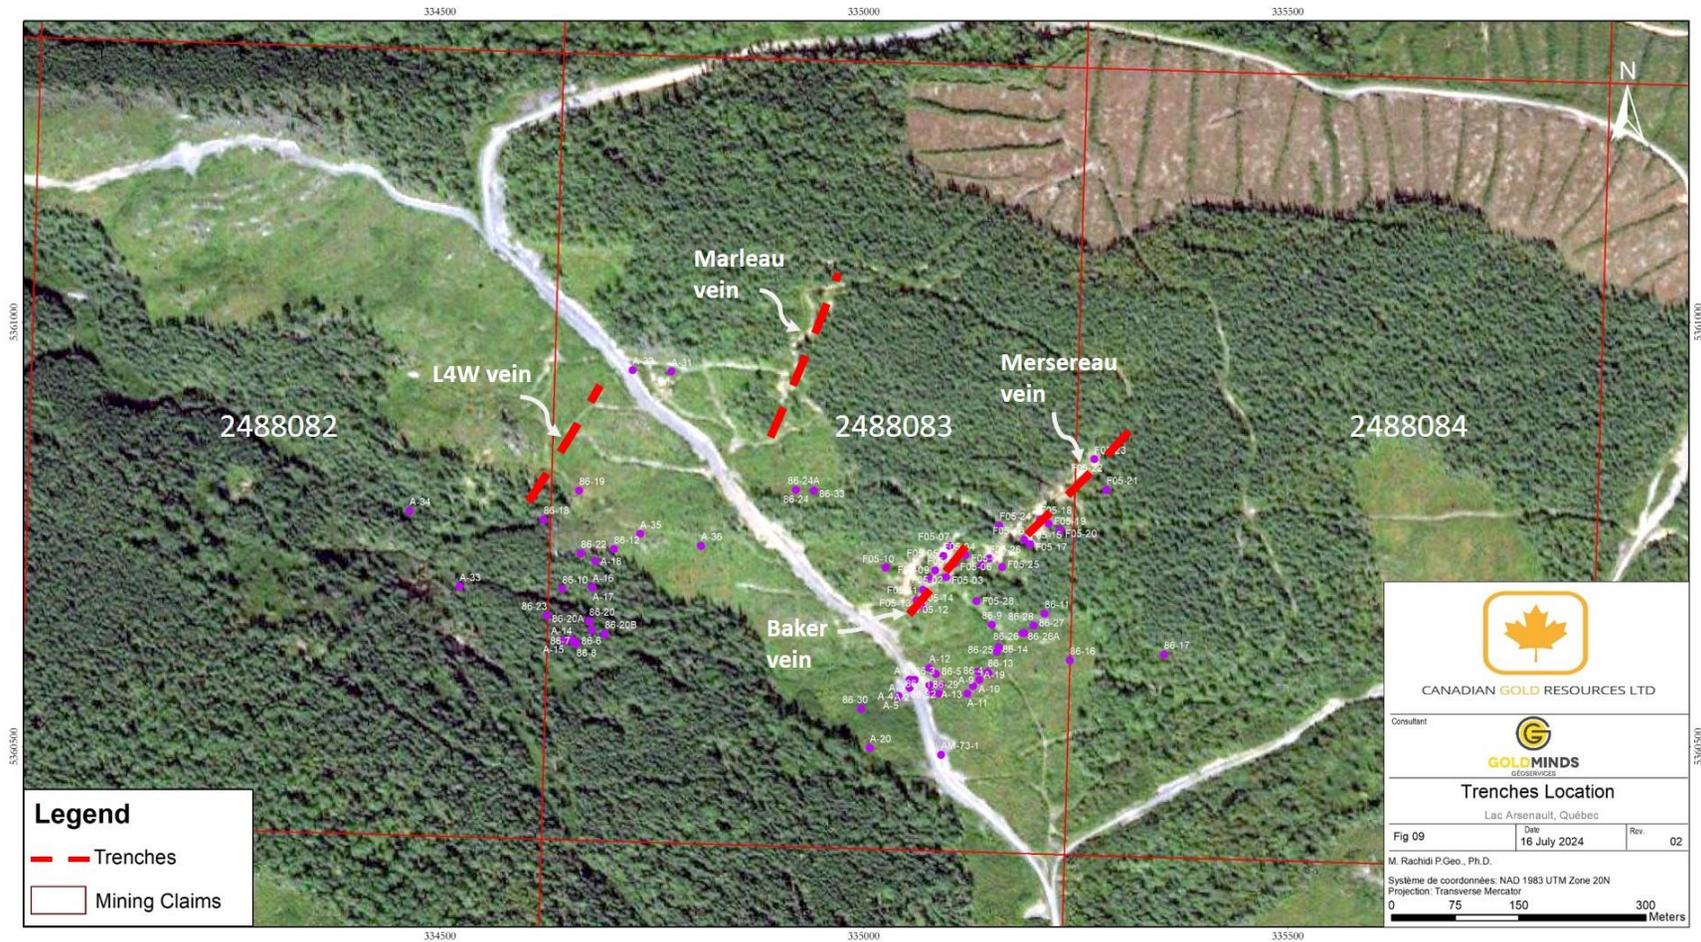


Figure 9 : Lac Arsenault trenches and veins location (Modified from Mersereau, 1987)

Newly excavated and cleaned trenches on the Lac Arsenault gold property provided a unique opportunity to identify 4 types of quartz veins that are concentrated along deformation corridors (Desrochers, 2020).

a) Type 1 veins are laminated veins (shear veins) rich in sulphides (pyrite, galena, sphalerite and some arsenopyrite and chalcopyrite) which contain high levels of gold, silver, lead, and sometimes zinc. Despite being relatively thin in the trenches, they represent veins that have a potential for continuity,

b) Type 2 veins are tension veins rich in sulphides and which were formed contemporaneously with type 1 veins during sinistral shear. They have been developed at a high angle with respect to the shears but have been folded in an isoclinal way which means that their envelope is subparallel to the shears. They appear to contain high levels of metals like type 1 veins. When present in large quantities and tightly folded, these veins also have interesting potential.

c) Type 3 veins are tension veins generally poorer in sulphides than type 1 and 2 veins. When less deformed, they have a comb texture with quartz crystals high angle to the contacts of the veins. These veins generally have lower gold grades (generally less than 1 g/t). These veins were generated at a high angle to the shear and were subsequently variably folded during continuous deformation. They are richer in arsenopyrite than type 1 and 2 veins. Although they contain a little gold, these veins have less potential and could even represent a dilution when they cut type 1 and 2 veins.

d) Type 4 veins are also tension veins very low in sulphides and possessing a filling texture with quartz crystals which are perpendicular to the contacts of the veins. These veins are poor in metals and are weakly undulating. They do not seem to represent a very large volume

Based on existing analyzes, interpretation is that type 1 and 2 veins are enriched in gold, silver, lead, cadmium, copper and zinc compared to type 3 veins, and all the veins form a deformation continuum along corridors-oriented N-S to NNE-SSO with a progressive decrease in metal contents as the deformation progressed.

The sinistral shear movement which was interpreted by Malo et al. (1998) and Pelchat (1995) was confirmed during the 2020 mapping for the shears that are associated with the vein corridors. Evidence of this sinister movement has been identified on the Mersereau, Baker and L4W trenches. According to Malo and al., (1993, 1998) and Desrochers (2020) the deposit is structurally controlled since veins are found in NNE-oriented sinistral, brittle-ductile shear zones that correspond to secondary structures associated with the Grand Pabos Fault. These secondary structures appear faulted/intersected by NNW-SSE brittle faults. These structures are visible at the outcrop scale and interpreted using helicopter-borne geophysical surveys and ground IP survey. The chargeability model produced from the IP survey clearly illustrates the presence of these N/NE deformation corridors but also shows several chargeable lineaments which trend E/NE and E/W. This indicates a stepped network producing a majority of polarized axes "sigmoidal" appearances. It further

indicates the presence of NW-SE faults, with appearances of dextral displacements in a RIEDEL fault system.

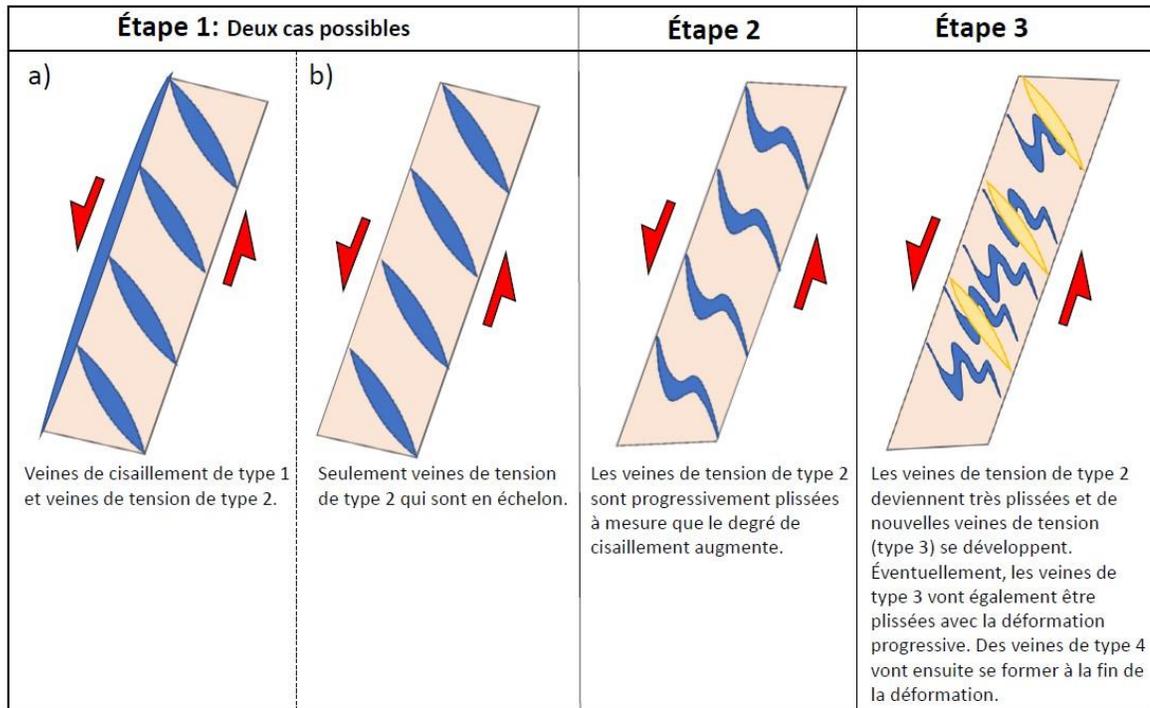


Figure 10 : The conceptual model of formation and deformation of quartz veins at the Lac Arsenault project (M. Desrochers)

Four major veins systems were mapped at the property (and). The four major vein systems previously outlined on the property, Baker, Mesereau, Line 4W and Marleau Vein Systems lie along I.P. anomalies defined during the 1988 survey. In addition to the mineralized vein systems, mineralized quartz vein float of unknown origin have also been located on the property (and).

- The Baker vein strikes 012° to 021° dipping steeply to the east (claim 2488083). On surface, it has been exposed for 122 feet. The Baker Quartz Vein system contains 5 to 75% sulphides mainly pyrite with minor argentite and galena (R. A. Campbell, 1994).
- The Mersereau vein, oriented NNE and located at around 100 meters to the east from the Baker vein (claim 2488083). Possibly the faulted northern extension of the Baker vein, striking 025° to 035° dipping 78° to the east along a contact between fracture shale and siltstone. The Mersereau vein containing sometimes 5% pyrite, sphalerite and galena (R. A. Campbell, 1994). Drilling in 2005 by Ressources Appalaches indicated a possible extension of the vein up to a vertical depth of 55 metres, as a sheared quartz vein intersected at this point assayed 0.15 g/t Au over 0.55 metre in Hole F05-20.

-
- The Line 4 W vein, is two feet wide, strikes 020° to 025° dips subvertically, located at around 500 metres to the west of the Baker vein (claim 2488082). The Line 4 W vein is comprised of banded quartz with stringers of pyrite, minor lead sulphide and zinc sulphide. The A grab sample, collected by Imperial Oil assayed 0.25 oz/ton Au, 1.04 oz/ton Ag, 1.63% Pb and 0.10% Zn (R. A. Campbell, 1994).
 - The Marleau vein was discovered in the 1986 Mondor Explorations drilling program (Claim 2488083) is located between the Baker vein and the Line 4W vein.

All the veins form a deformation continuum along corridors oriented N-S to NNE-SSO with a progressive decrease in metal contents as the deformation progressed. The mineralized vein systems may be related to the emplacement of the probable east-southeast trending fault and may be cut and offset by sets of en echelon northwest striking shear zones (and).

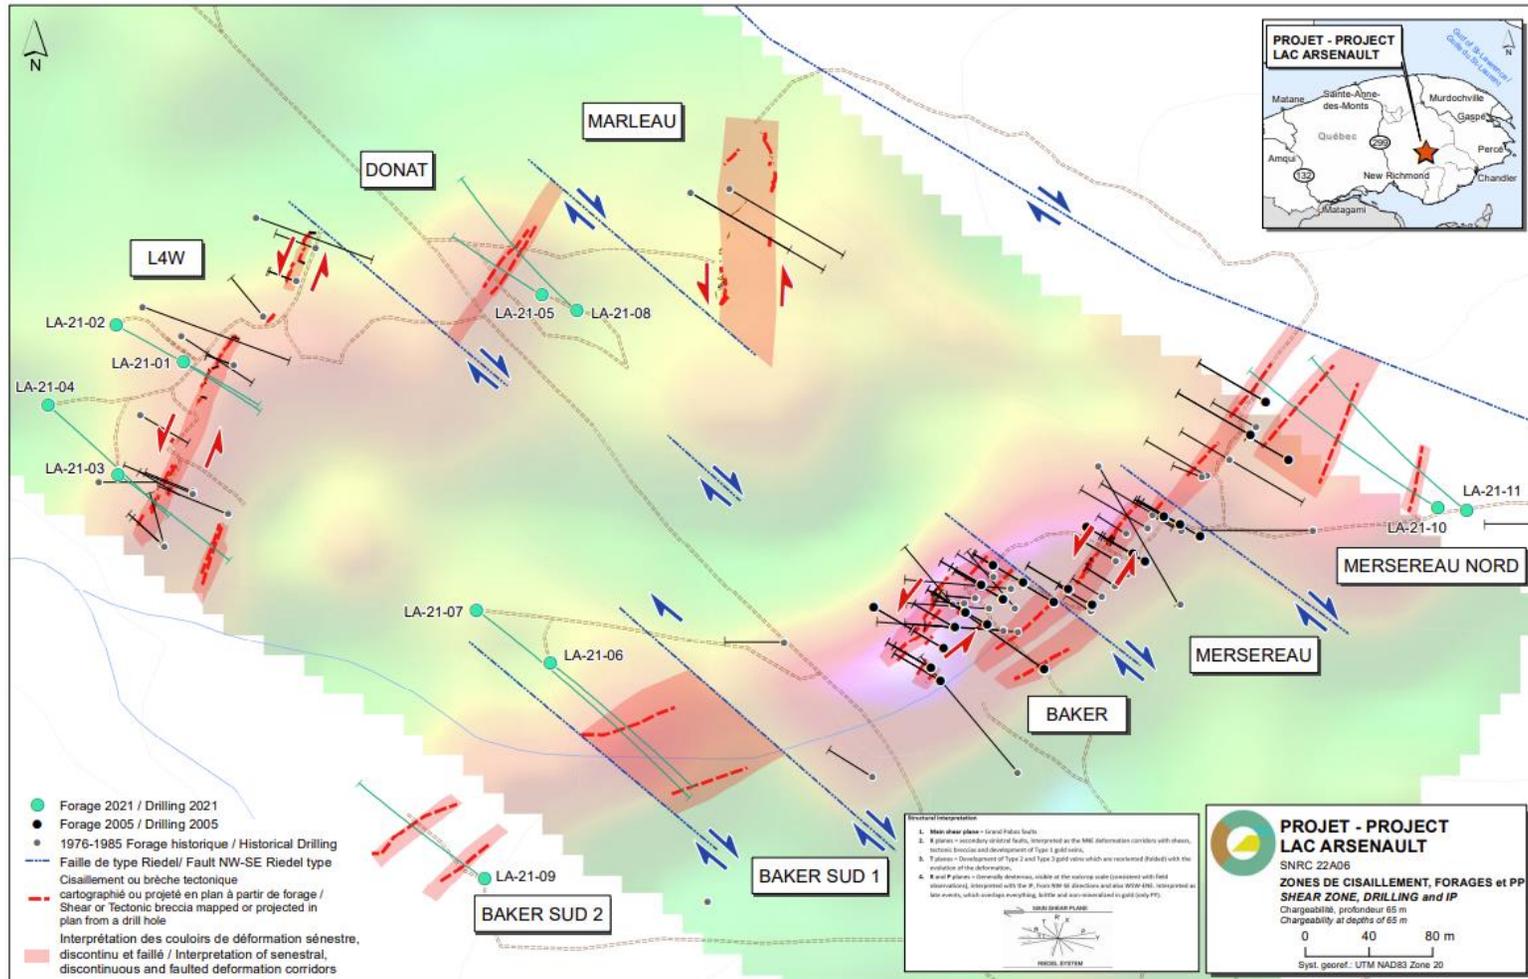


Figure 11 : Induce polarization survey with the location of the major mineralized veins at the Lac Arsenault (source 1844)

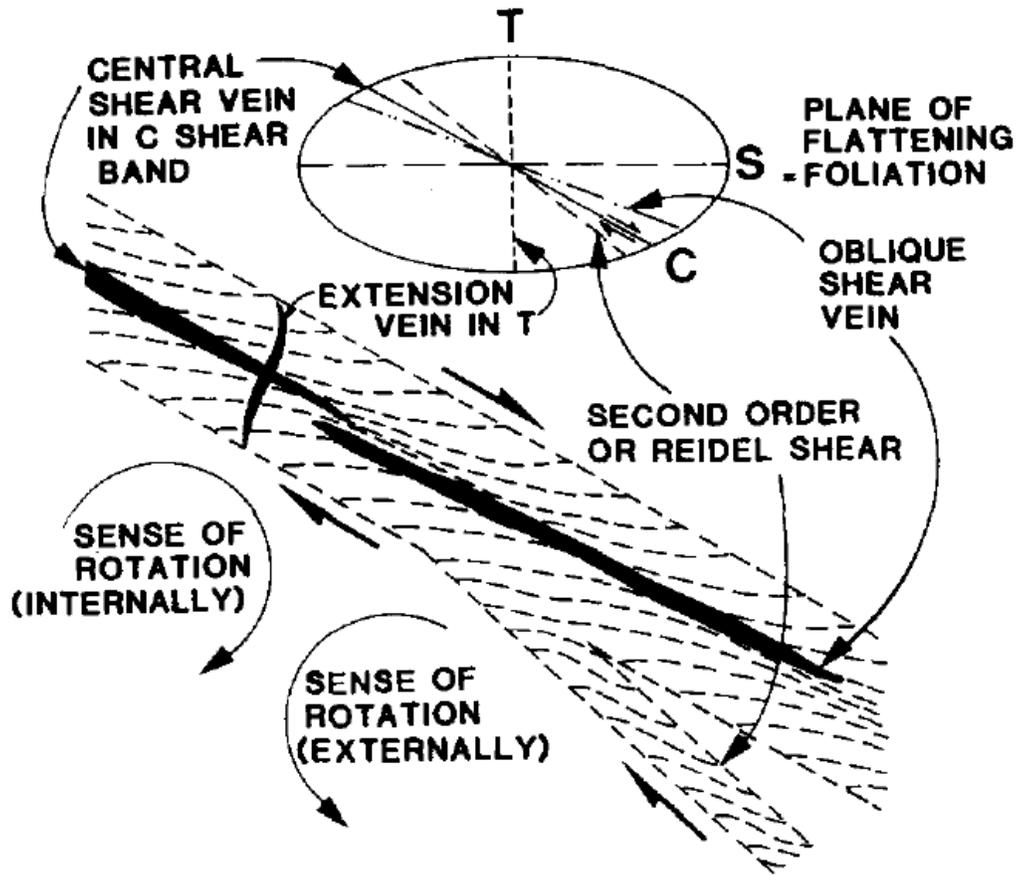


Figure 12 : Structural features of shear zones and associated vein types (Hodgson, 1987)

The mineralization occurs as fault-fill veins intruded in the greywackes and siltstones of the Arsenault Formation (Pelchat, 1995). The mineralized veins on the Lac Arsenault property can be classified as mesothermal auriferous vein-type deposits.

8 Deposit Types (Item 8)

Situated along the Grand Pabos Fault known for high grade Au, Ag, Cu, Pb. The Lac Arsenault property mineralization consists of polymetallic quartz-carbonate veins that cut through the greywackes and the siltstones of the Arsenault Formation. Most of these veins were emplaced in brittle-ductile shear zones generally striking NNE that are considered as secondary structures associated to the Grand Pabos fault. Epithermal vein system associated with tectonics along a regional fault.

9 Exploration (Item 9)

Historical (PREVIOUS PROPERTY OWNER) Neither Amseco Exploration Ltd. (Issuer) nor Canadian Gold Resources Ltd. (Target) have done exploration or drilling on the property. Except sampling of a 30 kg composite in June 2024 for Metallurgical testing and soil sampling in 2023.

Exploration work on the Lac Arsenault project was first initiated in late 2018 by 1844 Resources Inc. (formerly Gespeg copper Resources Inc.). Geological reconnaissance, airborne geophysical survey, cleaning / widening / structural mapping of historic trenches, geochemical soil survey, induced polarization geophysical survey and drilling was carried out on the Lac Arsenault project.

9.1 Geophysical surveying

9.1.1 High-resolution magnetic (MAG) survey

Prospectair conducted a heliborne high-resolution magnetic (MAG) survey for the mineral exploration company 1844 Resources Inc. over its Lac Arsenault Property (Figure 13). The survey was flown from October 26th to 29th 2020 (Dubé, 2020). One survey block was flown for a total of 481 l-km (Table 5). A total of 6 production flights were performed using Prospectair's Eurocopter EC120B, registration C-GEDI.

Table 5 : Survey block particulars

Block	NTS Mapsheet	Line-km flown	Flight numbers	Dates Flown
Lac Arsenault	22A06	481 l-km	Flt 1 to 6	October 26 th to 29 th

The Lac Arsenault block was flown with traverse lines at 50 m spacing and control lines spaced every 500 m. The survey lines were oriented N002. The control lines were oriented perpendicular to traverse lines. The average height above ground of the helicopter was 41 m and the magnetic sensor was at 22 m.



Figure 13 : Regional Survey location (NAD-83 datum, UTM projection zone 20N)

9.1.1.1 Survey specifications

A) Data Recording

The following parameters were recorded during the course of the survey:

In the helicopter:

- GPS positional data: time, latitude, longitude, altitude, heading and accuracy (PDOP) recorded at intervals of 0.1 s;
- Total magnetic field: recorded at intervals of 0.1 s;
- Pressure as measured by the barometric altimeter at intervals of 0.1 s;
- Terrain clearance as measured by the radar altimeter at intervals of 0.1 s;

At the base and remote magnetic ground stations:

- Total magnetic field: recorded at intervals of 1 s;
- GPS time recorded every 1s to synchronize with airborne data.

B) Technical specifications

The data quality control was performed on a daily basis. The following technical specifications were adhered to:

- Height – 50m mean terrain clearance for the helicopter except in areas where Transport Canada regulations prevent flying at this height, or as deemed by the pilot to ensure safety. Traverse lines and control lines must be flown at the same altitude at points of intersection; the altitude tolerances are limited to no more than 30 m difference between traverse lines and control lines.
- Airborne Magnetometer Data – A 0.5 nT noise envelope not to be exceeded for more than 500 m line-length without a reflight.
- Diurnal Specifications – A maximum tolerance of 5.0 nT (peak to peak) deviation from a long chord of one minute at the base station.
- Flying Speed – The average ground speed for the survey aircraft should be 120 kph. The acceptable high limit is 180 kph over flat topography.
- Radar Altimeter – minimal accuracy of 5%, minimum range of 0-2500 m.
- Barometer – Absolute air pressure to 0.1 kPa.
- Flight Path Following – The line spacing not to vary by more than 30% from the ideal spacing over a distance of more than 300 m, except as required for aviation safety.

9.1.1.2 Results and Discussion

The residual Total Magnetic Intensity (TMI) of the Lac Arsenault block, presented in Figure 15, is very settled and varies over a range of 841 nT, with an average of -80 nT and a standard deviation of 45 nT.

The magnetic field is characterized by a few dispersed magnetic anomalies surrounded by areas with extremely settled magnetic variations (Figure 14). In a general sense, areas with lower background values (especially in the northern half of the block) and decreased signal variability are likely to be dominated by sedimentary rocks, while the magnetic anomalies are probably related to intrusive rocks.

The stronger anomalies, mostly located at the extreme east of the block, are likely related to mafic intrusive rocks, while weaker anomalies could rather be associated to intermediate or felsic intrusions. Stronger magnetic anomalies are best seen on Figure 15 which shows the residual TMI data with a linear color distribution. The longer wavelength component of the magnetic anomalies seen are indicative of the rooting of the magnetic sources at depth for most anomalies, and seem to indicate a general south dip for E-W trending sources and a general east dip for N-S trending.

Magnetic lineaments are generally trending E-W in the area, but can vary from ENE-WSW to NW-SE. Several lineaments are locally curved, attesting that the area underwent strong deformation events in the past and indicating that shearing has possibly occurred in the area. In general terms, magnetic lineaments are related to rock formations that are enriched in magnetic minerals (magnetite and/or pyrrhotite).

In many areas, it is possible to detect structural features offsetting observed magnetic lineaments and causing abrupt interruption or changes of the magnetic response. These features are typically caused by faults, fractures and shear zones (Figure 16 and Figure 17). If they are thought to be favorable structures in the exploration context of the Lac Arsenault project, they should be paid particular attention and should be the object of a comprehensive structural interpretation, which is beyond the scope of this report.

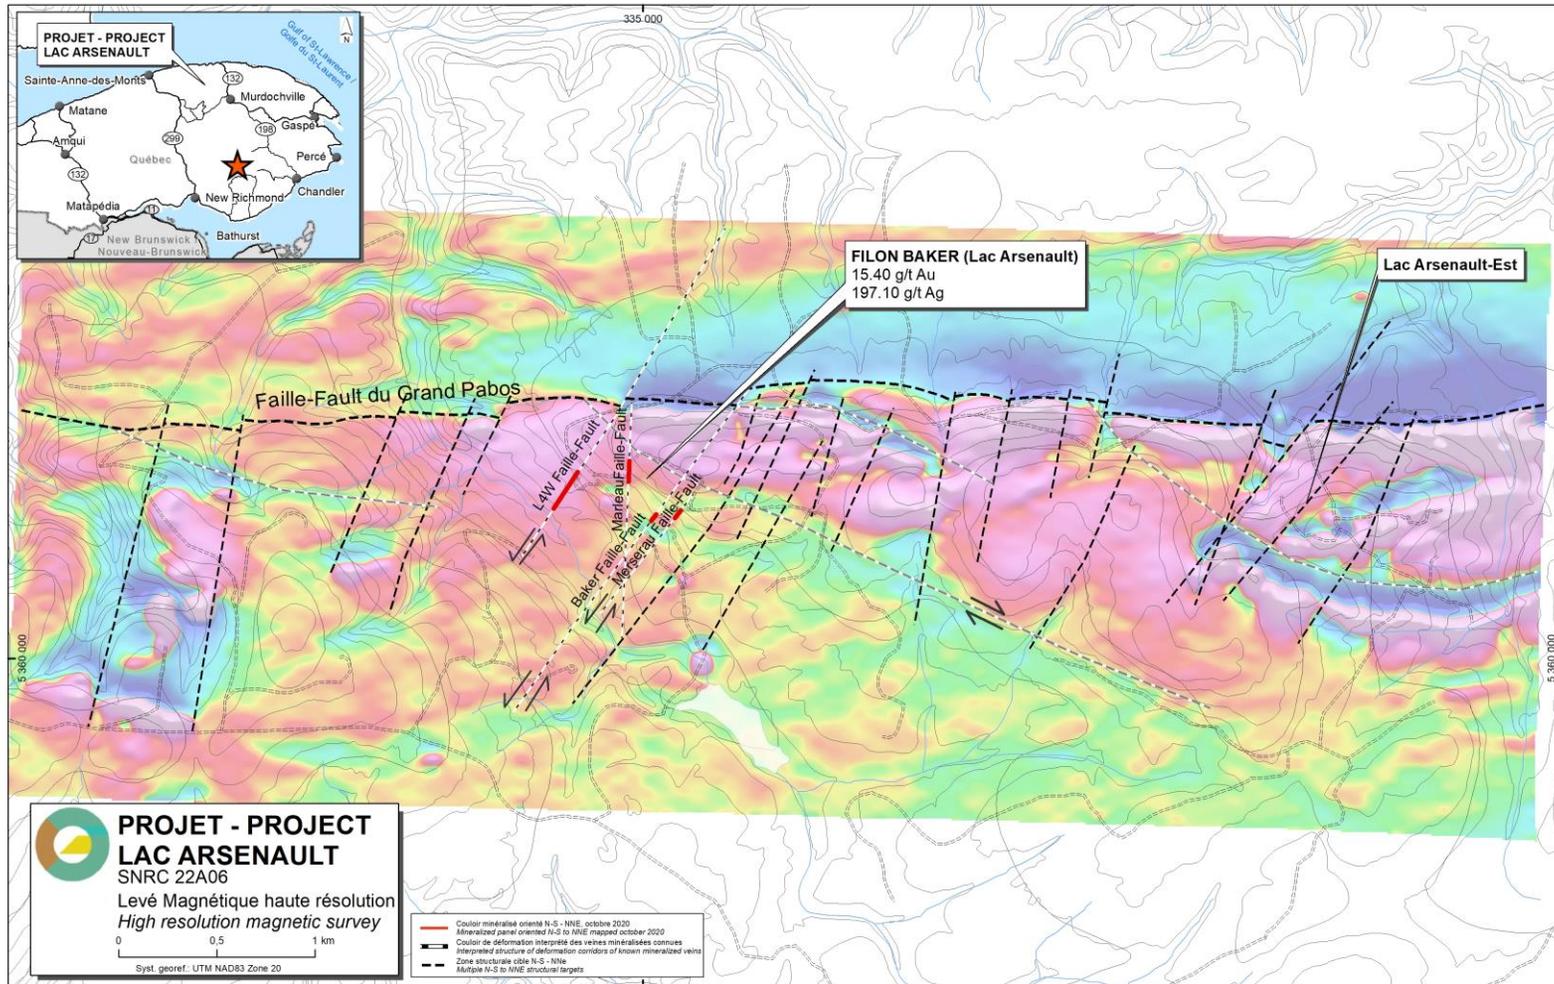


Figure 14 : High resolution interpreted magnetic survey (1844)

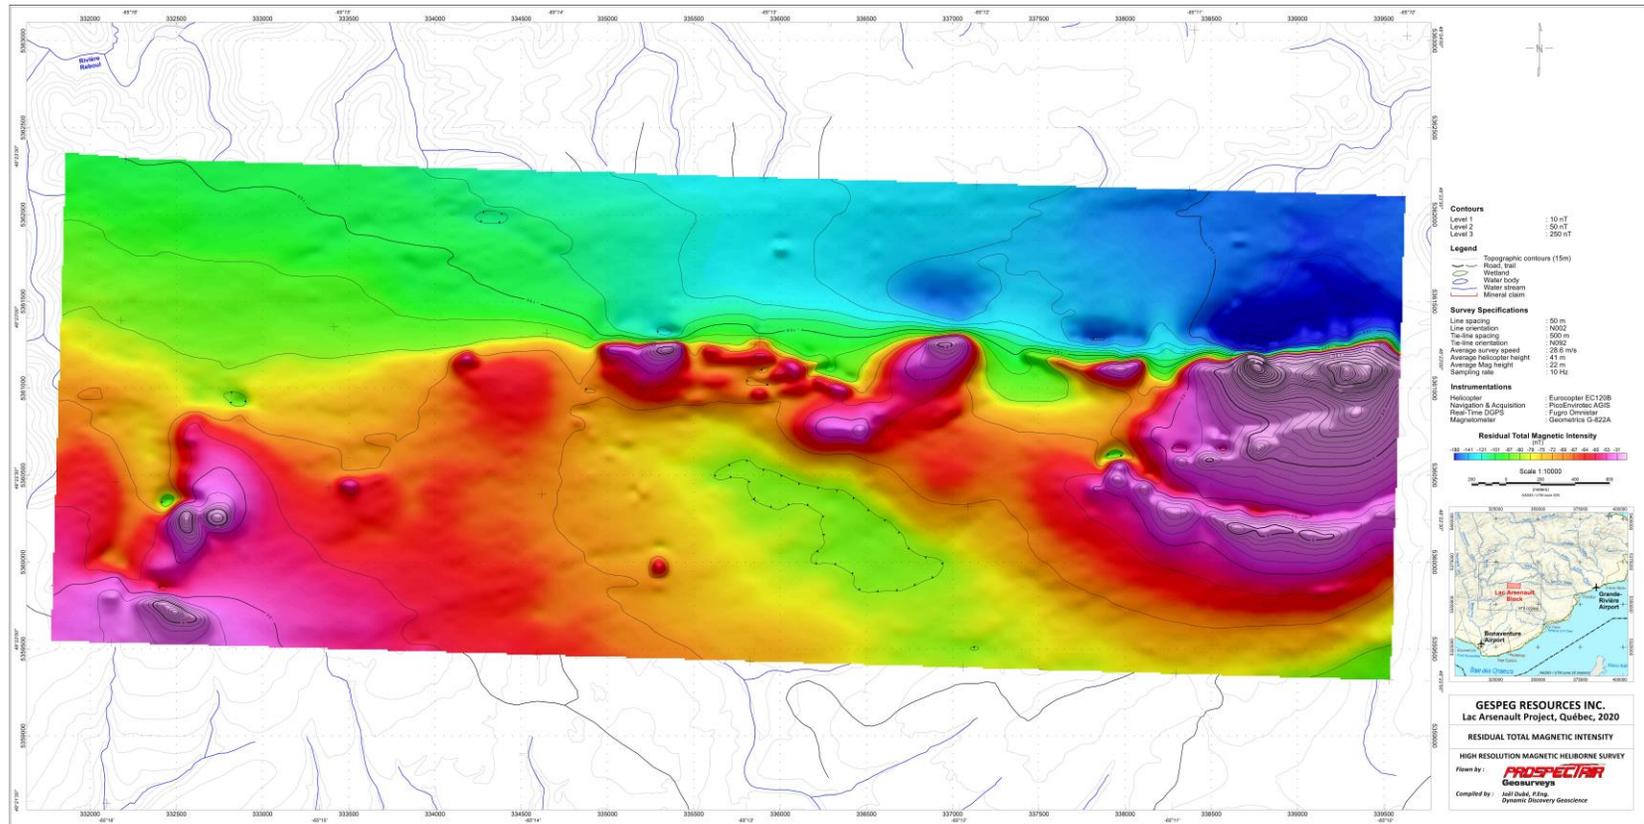


Figure 15 : Residual Total Magnetic Intensity with equal area color distribution (1844)

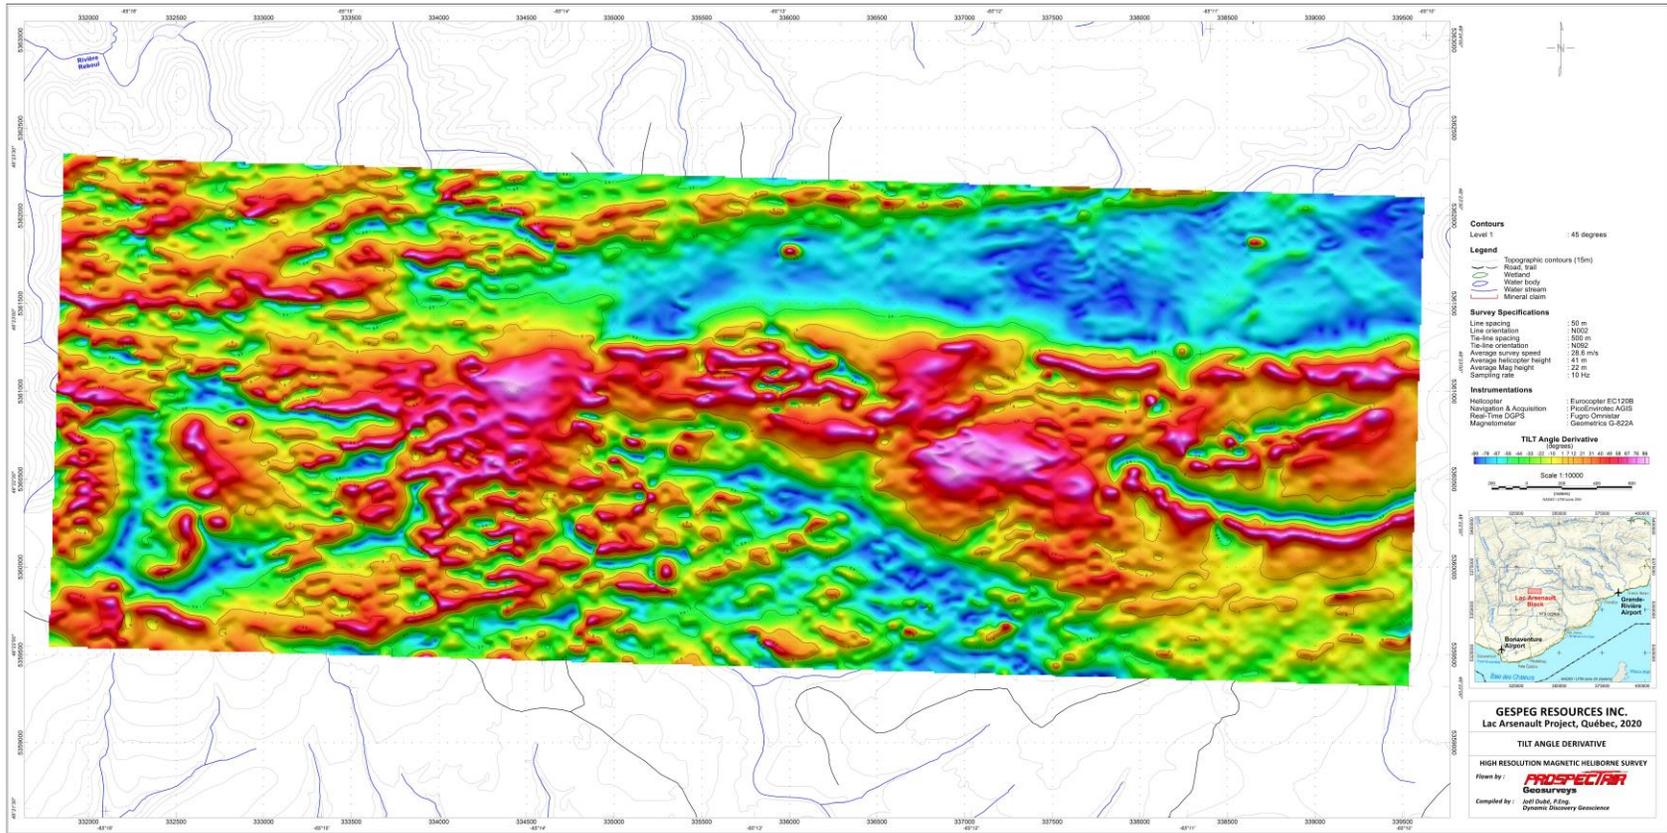


Figure 16 : Tilt Angle Derivative (1844)

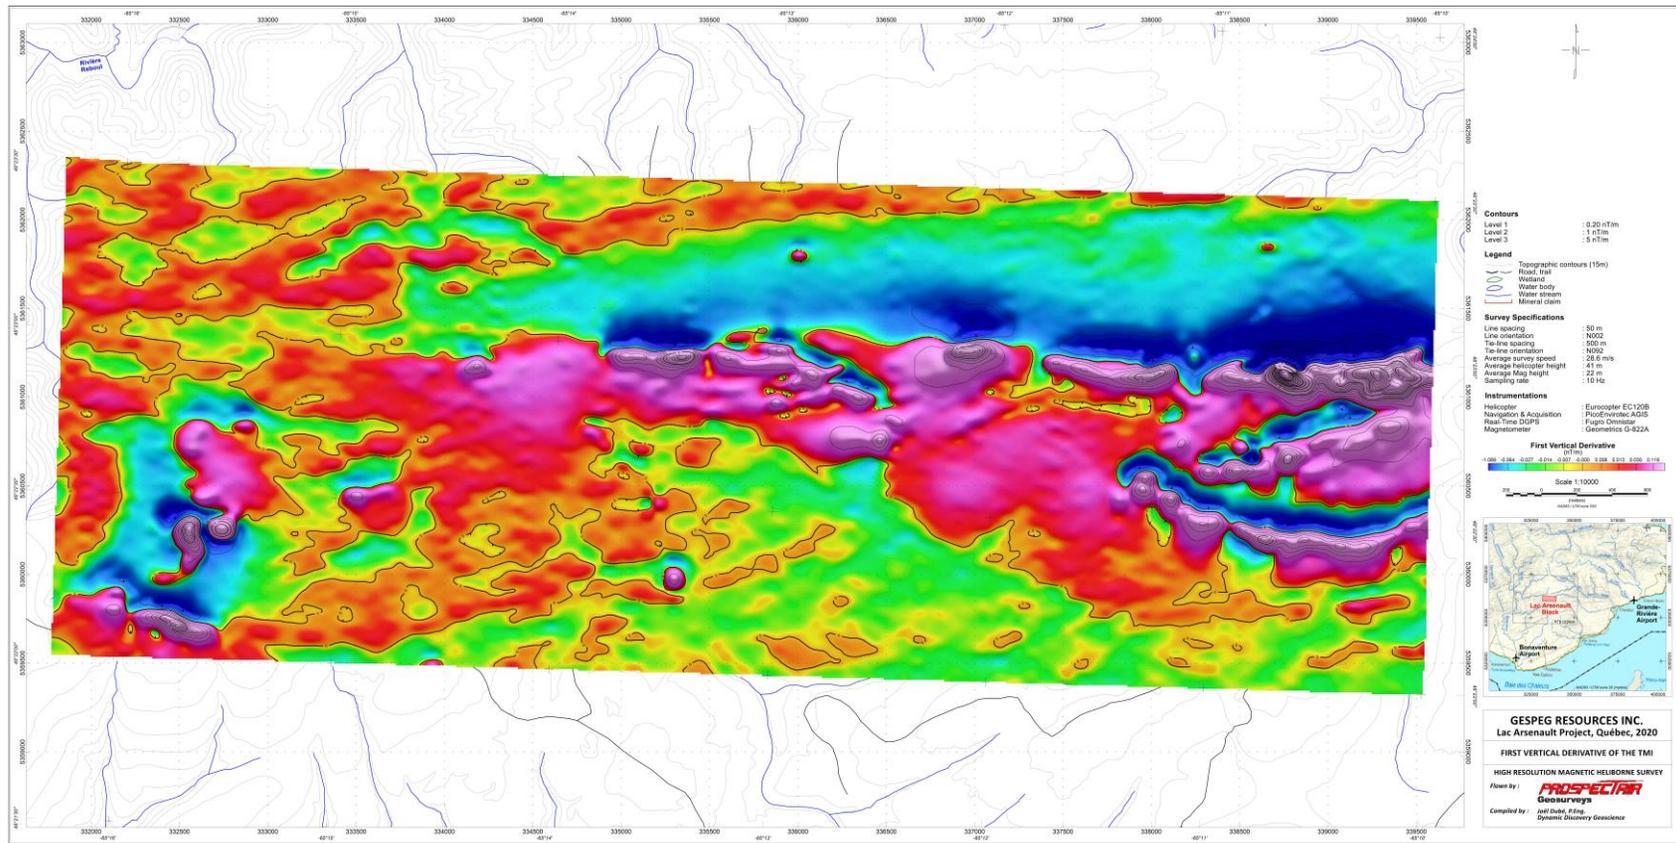


Figure 17 : First Vertical Derivative of the TMI (1844)

The survey grid that was prepared over the area consists of a network of ten lines (L400N to L850S) oriented N125, spaced every 50m and of 1,300 m in length, for a total of 13.0 km of IP surveying (Figure 18).

9.1.2.1 IP Survey technical specifications

Two 450 m long tie-lines were also cut perpendicular to survey lines, but were not surveyed, for a grand total of 13.9 km of line cutting. Lines were cut and chained by a team under the supervision of Mr. Samuel Choquette, of Exploration Choquette Inc. A handheld GPS unit was used by the IP crew to record survey stations locations every 100 m or so along survey lines with an absolute accuracy of 2 to 5 m.

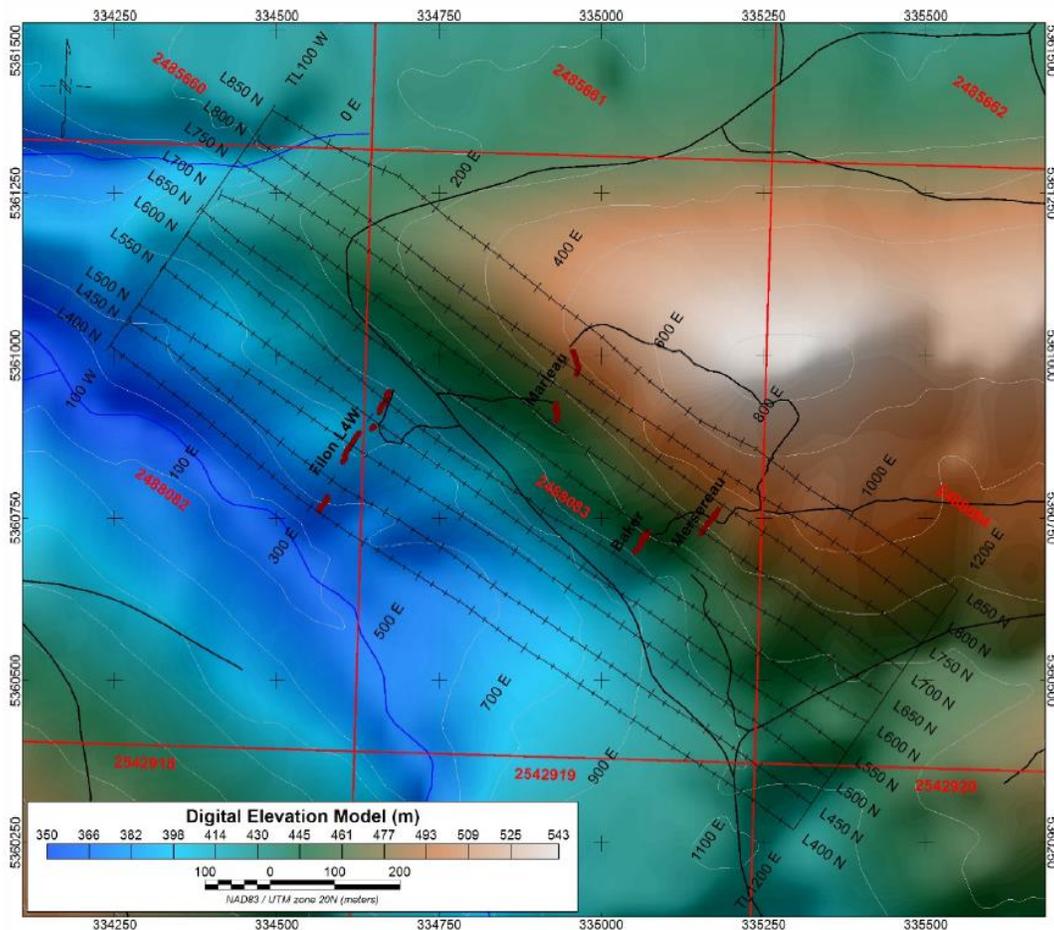


Figure 19 : Digital elevation model with survey lines and mineral claims (1844)

The active mineral claim titles covered by the survey are shown in light red on Figure 19, and are listed in Table 6. Mineralized veins reported in 1844 Resources’ databases are also identified and shown as dark red lines on this figure.

Table 6 : Mineral claims covered by the survey

Mineral Claim
2485660
2488082
2488083
2488084
2542919
2542920

The IP survey, totalling 13.0 km, was performed by one survey crew of Géophysique TMC inc. from Val-d’Or, which was managed by Mr. Esteban Zaragoza. The IP survey took place from November 15th to 25th 2020. Field conditions were challenging with steep topography within the survey grid and difficult access road conditions (Figure 20), but the crew made sure to operate in a safe manner and the data collection process went well overall. A total of 4,550 data samples were recorded.



Figure 20 : Field conditions on the Lac Arsenault project (1844)

Technical supervision was provided by Mr. Joël Dubé, P.Eng., of Dynamic Discovery Geoscience in Ottawa. On top of data inspection performed on the field by the operator while conducting the survey and after transferring the data to a computer, the data were sent to Dynamic Discovery

Geoscience's office on a daily basis to undergo full data QC. All data were verified in this manner before authorizing demobilization of the survey crew from the field.

The equipment used for the IP survey was made of a transmitting and a receiving circuit operating in time domain. An Instrumentation GDD TXII transmitter, with a power of 1800 W, was used to create the current square wave form. The source of current was supplied by a 2.0 kW motor generator. Stainless steel electrodes were used to ensure measurements' stability. The transmitter signal had an effective half-cycle of 2 seconds.

The primary voltage VP and the chargeability M were recorded by an Elrec-Pro receiver from IRIS Instruments. Integration of the transient voltage after current shut-off was achieved using 20 time windows of equal duration. During survey acquisition on the field, the chargeability recorded for each window was normalized to Newmont standards, which enabled identification of electromagnetic coupling effects, of abnormally strong telluric noise or of any other type of interference requiring to be addressed before continuing the survey. A minimum of 8 half-cycles were recorded at each measurement point.

9.1.2.2 Results and discussion

Data compilation including editing and filtering, quality control (QC), and final data processing was performed by Joël Dubé, P.Eng. Processing was performed on high performance computers optimized for rapid processing tasks. Seequent (Geosoft) software Oasis Montaj version 9.9.1 was used.

For each of the lines surveyed with the IP technique, sections have been created showing apparent resistivity and chargeability pseudo-sections, true-depth inversion models of resistivity and chargeability, as well as an interpretation line. The interpretation consists in series of interpretation boxes. Boxes above the interpretation line enable classification of chargeability anomalies based on their intensity. Four anomaly classes are used: marginal, weak, moderate and strong. Boxes below this line are used to classify resistivity classes, mainly to highlight correlations between chargeability and resistivity anomalies, and are simply divided into two categories: resistive or conductive. Interpretation boxes are located in the vertical projection of the area where the source is thought closest to surface. Chargeability anomalies that can be recognized and followed over multiple lines enabled the definition of polarizable axes or of compact networks of axes. These chargeable axes were given ID numbers, and these numbers are shown on sections, above chargeability interpretation boxes. The sections are provided at the 1:2,500 scale in digital form as PDF, PNG and Geosoft MAP files.

Results are also shown on plan maps. First of all, results from IP inversion models have been extracted at several depths for each line, and then interpolated between the lines to create grids showing the lateral changes of the resistivity and chargeability distribution within the ground. Results were extracted at depths of 10, 35 and 65 meters. The data grids shown on these images were

created with a 12.5 m grid cell size, appropriate for the survey stations spaced every 25 m. Finally, an interpretation map was made, which integrates interpretation elements based on the newly acquired IP data as well as on the highest resolution airborne magnetic data available in the area (Dubé, 2020).

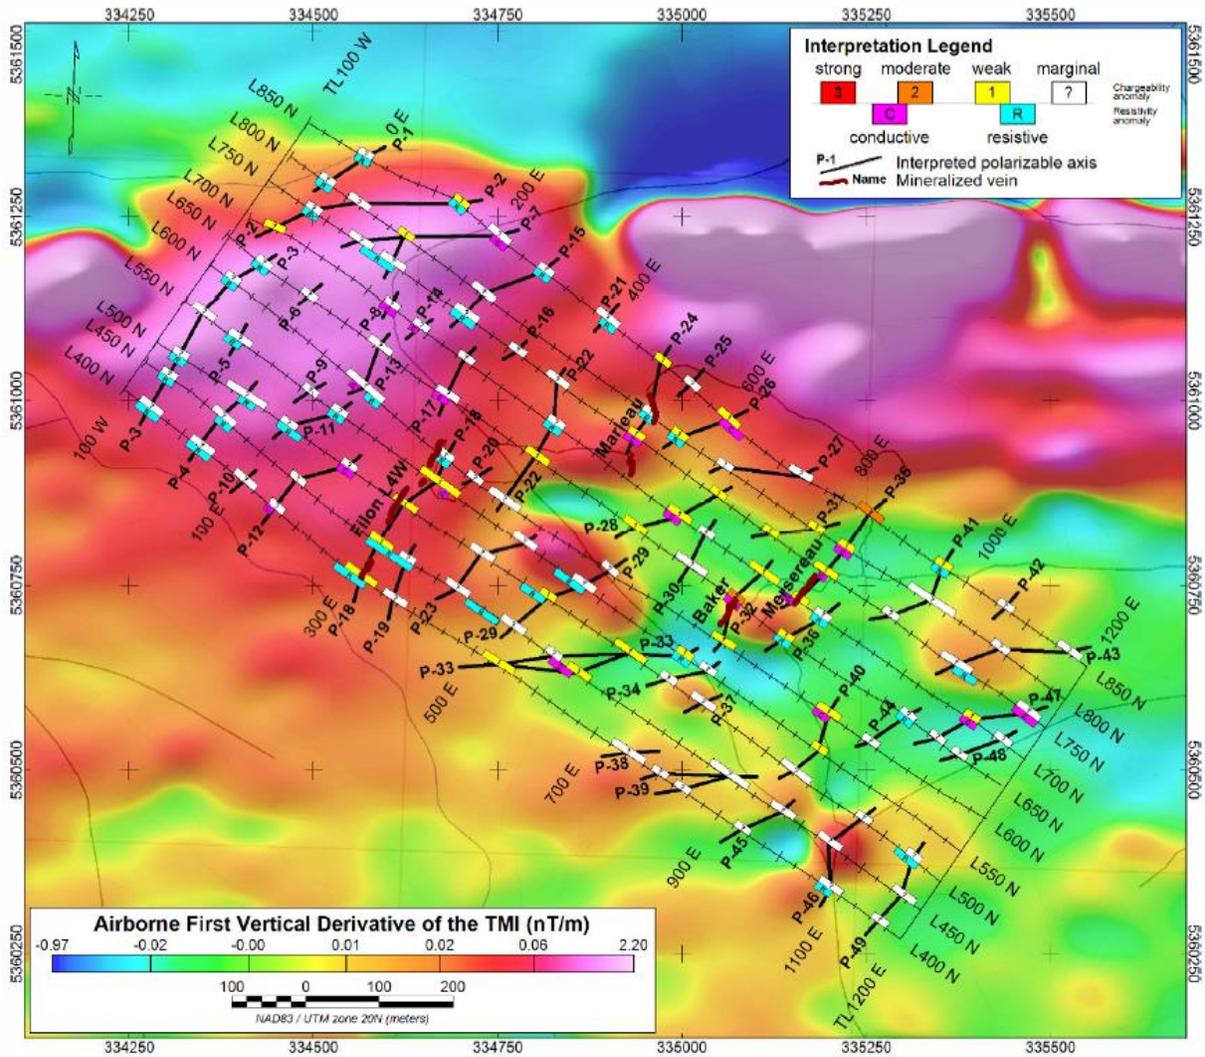


Figure 21 : IP interpretation over airborne FVD data (1844)

The first vertical derivative (FVD) of the total magnetic intensity data from this survey are shown in the background of Figure 21 and of the interpretation map to enable direct comparison of the IP

interpretation with the magnetic data. The maps created are referenced with respect to the NAD-83 datum, UTM zone 20N projection. In total, 56 resistivity contrast anomalies are reported: 19 as conductive and 37 as resistive.

Regarding the magnetic data, given the very low magnetic susceptibility values expected from the sedimentary rocks, which are dominant in the area, the magnetic response seems to be mostly controlled by intrusive rocks preferentially elongated in an E-W fashion and likely associated to the dominant Grand-Pabos fault system also oriented E-W and passing at the north tip of the survey grid. The fact that pyrrhotite is absent from the assemblage of sulphides found in known mineral occurrences explains why no direct correlation can be established between these occurrences and the magnetic data. However, as stated above breaks seen in the magnetic signal appear to be a good mean to outline fragile/ductile structures affecting the area. On the other hand, based on the analysis presented at the preceding section, chargeability data are a better tool to directly identify these faulting and shearing structures, at least for those that are mineralized in sulphides.

9.2 Surface sampling

9.2.1 Channel and grab samples

Several channel and grab samples were taken from different zone at the Lac Arsenault property (Baker, Marleau, Mersereau and L4W), (Figure 22, Figure 23, Figure 24 and Figure 25). Sampling intervals were selected based on interpretation of the subsurface geology. Samples batches were submitted for preparation and assaying for Au, Ag, Pb and Zn to the laboratory.

At the Baker zone several channel (8 samples) and grab samples (6 samples) were collected. The best results include 32.83 g/t Au over 0.27 m (sample VB R10) and 30 g/t Au from grab sample K434484.

At Zone L4W a total of 6 surface channel samples and 12 grab samples from the exposed veins were collected. The best results from the southern part of the L4W zone Channel sample LA-20-R3 (13.5 g/t Au over 0.75m).

At Marleau zone a total of 7 channel samples and 11 grab samples. The best results from the southern part of the Marleau zone grab sample X340128 (10.9 g/t Au).

At Mersereau zone a total of 11 channel samples and 7 grab samples. The best results from the southern part of the Mersereau zone grab sample K434489 (39.7 g/t Au).

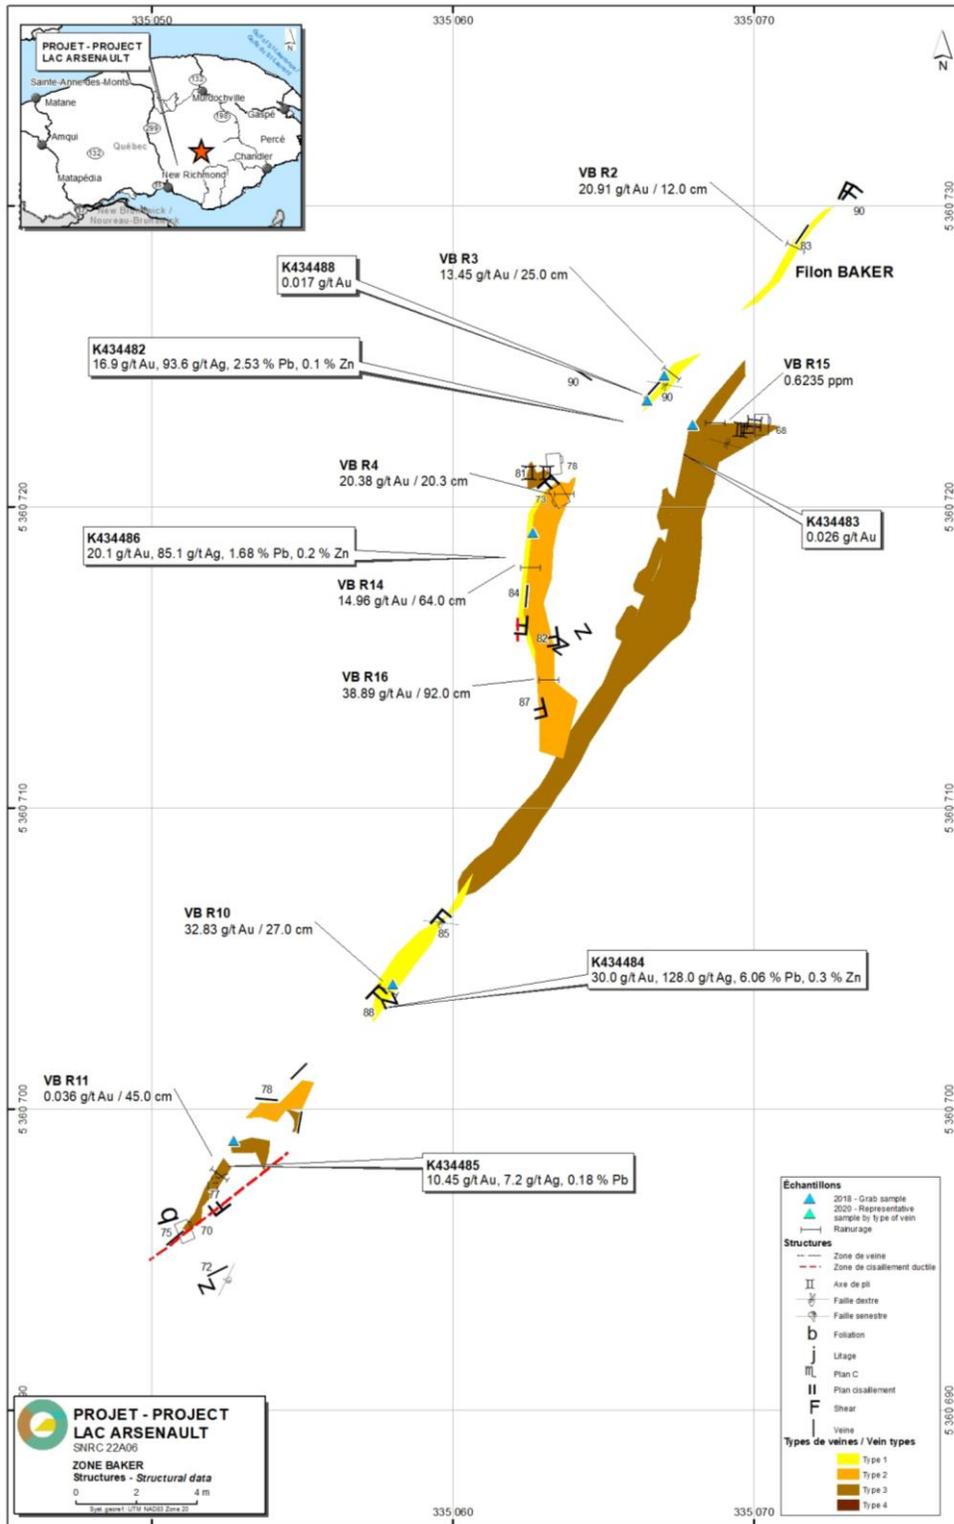


Figure 22 : Structural data and surface samples from Baker zone (1844)

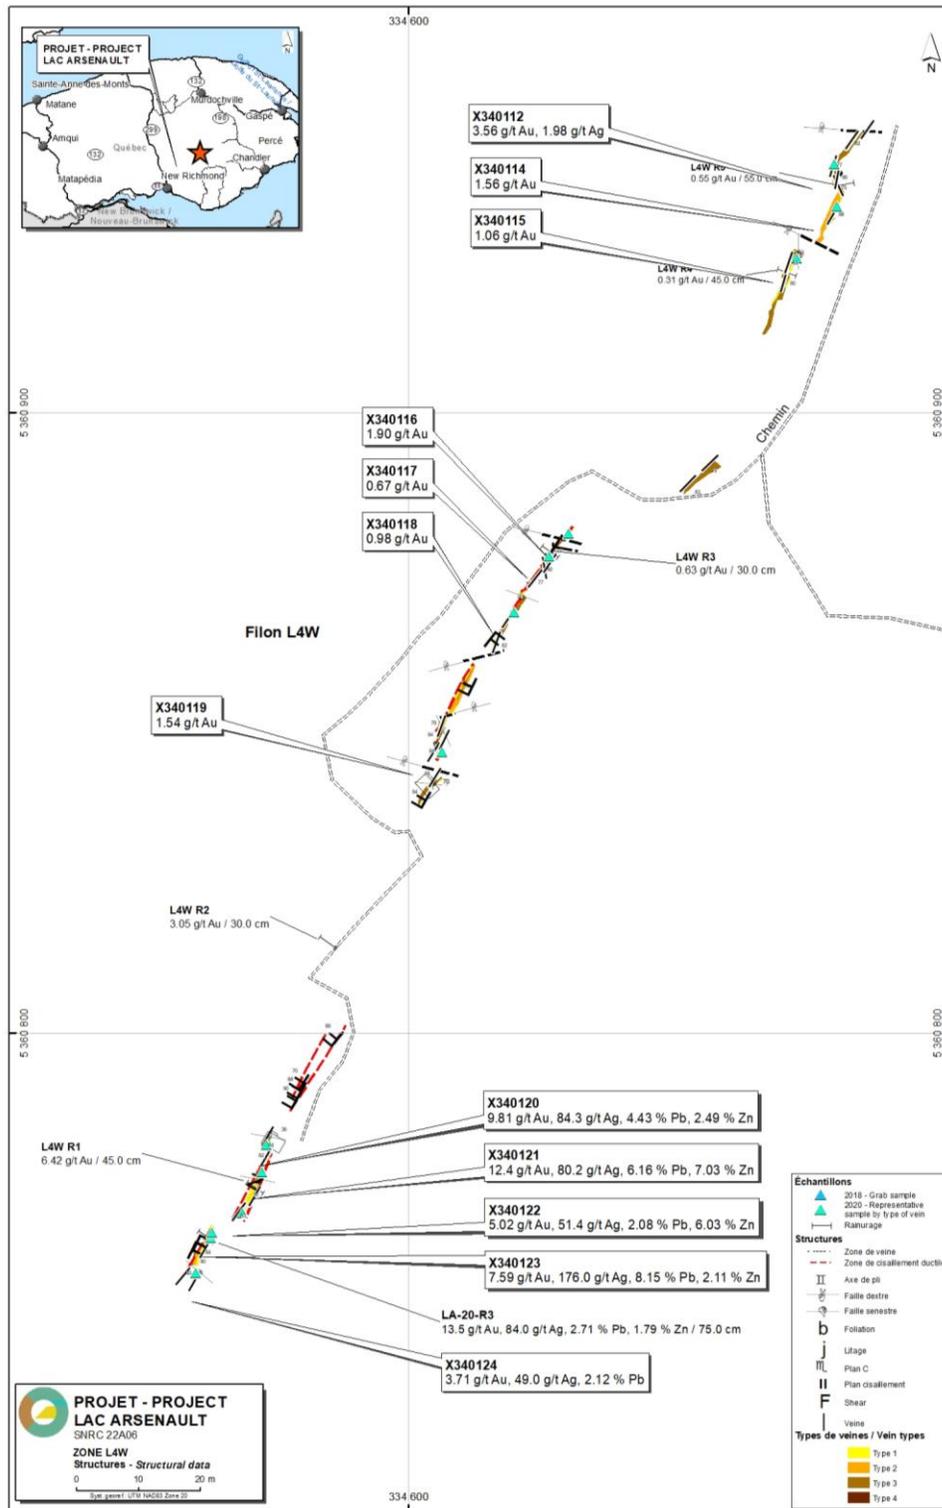


Figure 23 : Structural data and surface samples from L4W zone (1844)

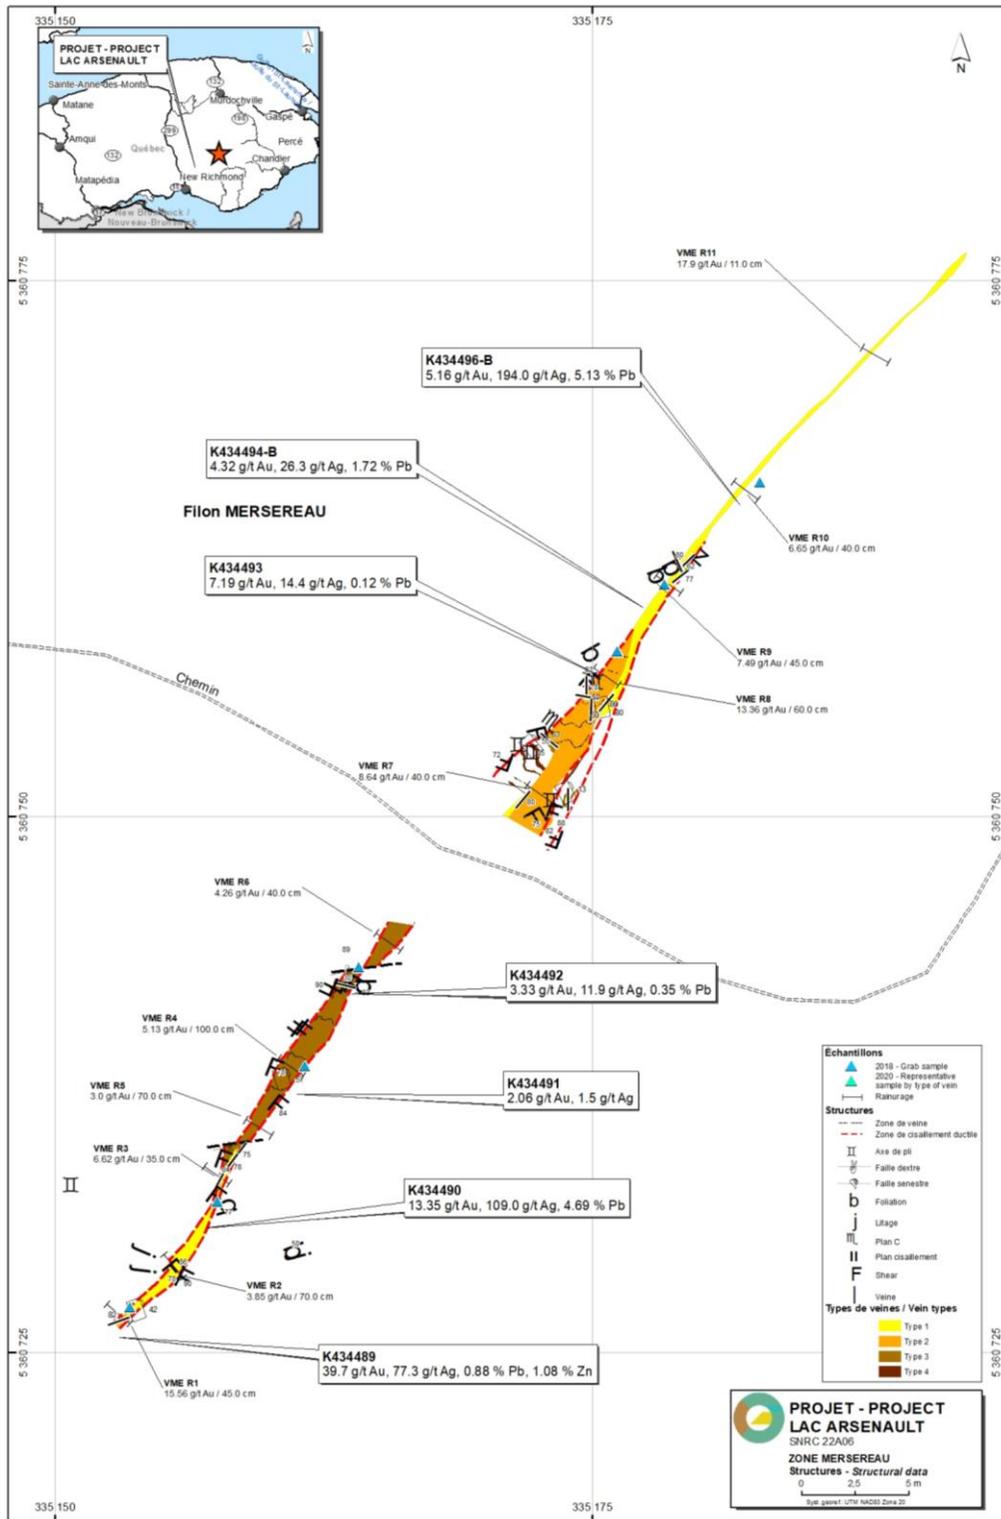


Figure 25 : Structural data and surface samples from Mersereau zone (1844)

9.2.2 Soil samples

During the fall of 2020, 1844 Resources initiated soil surveys in the southern part of the property. The purpose of these soil surveys was to define exploration targets for gold (Au), silver (Ag), copper (Cu) and other minerals. A total of 481 soil samples were collected (Figure 26). The soil samples were analysed by ALS Chemex of Val-d'Or using the ME-MS41L method for Au, Ag, Al, As, B, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, Hg, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Pt, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn and Zr (Table 7).

The assay results shows strong correlation between gold (Au) and lead (Pb) and moderate correlation with arsenic (As) and silver (Ag), (Bussi eres, 2021).

The correlation assemblages observed are:

- Au, Pb, As, Ag: quartz-carbonate veins;
- Hf, Zr, Th, Sc: hydrothermal systems;
- Al, Cr, S, Se, Fe, In: mafic intrusions with sulfides;
- Cu, Ni, Co, Zn: mafic intrusions with sulfides.

Base on the statistical correlation assemblages and the usual metal mineralization indicator elements, the author selected 23 elements (Ag, Al, As, Au, Ba, Ca, Co, Cr, Cu, Fe, Hf, In, Mg, Mn, Mo, Ni, Pb, Sb, Sc, Se, Th, Zn and Zr) to generate “thematic maps” showing element anomalies.

No general anomalous zones were outline by the soil survey (Figure 27 and Figure 28) and therefore no general follow-up program is recommended, except for three sites:

- The sites of samples A137 and A138, in the southwest corner of the survey grid, which are anomalous for most of the elements. A small trench is recommended to investigate the source of the anomalous values.
- The site of the Sc-anomalous zone in the northwest corner of the survey grid, which is also anomalous in Au, As, Co, Cu, Mn, Ni, Zn and corresponds to the intersection of faults. A small trench is also recommended to investigate a possible massive sulfide source.
- The northern border of the soil survey, located immediately south of a subsidiary fault of the Grand Pabos Fault, which correspond to the Sc-anomalous zone (Figure 29).

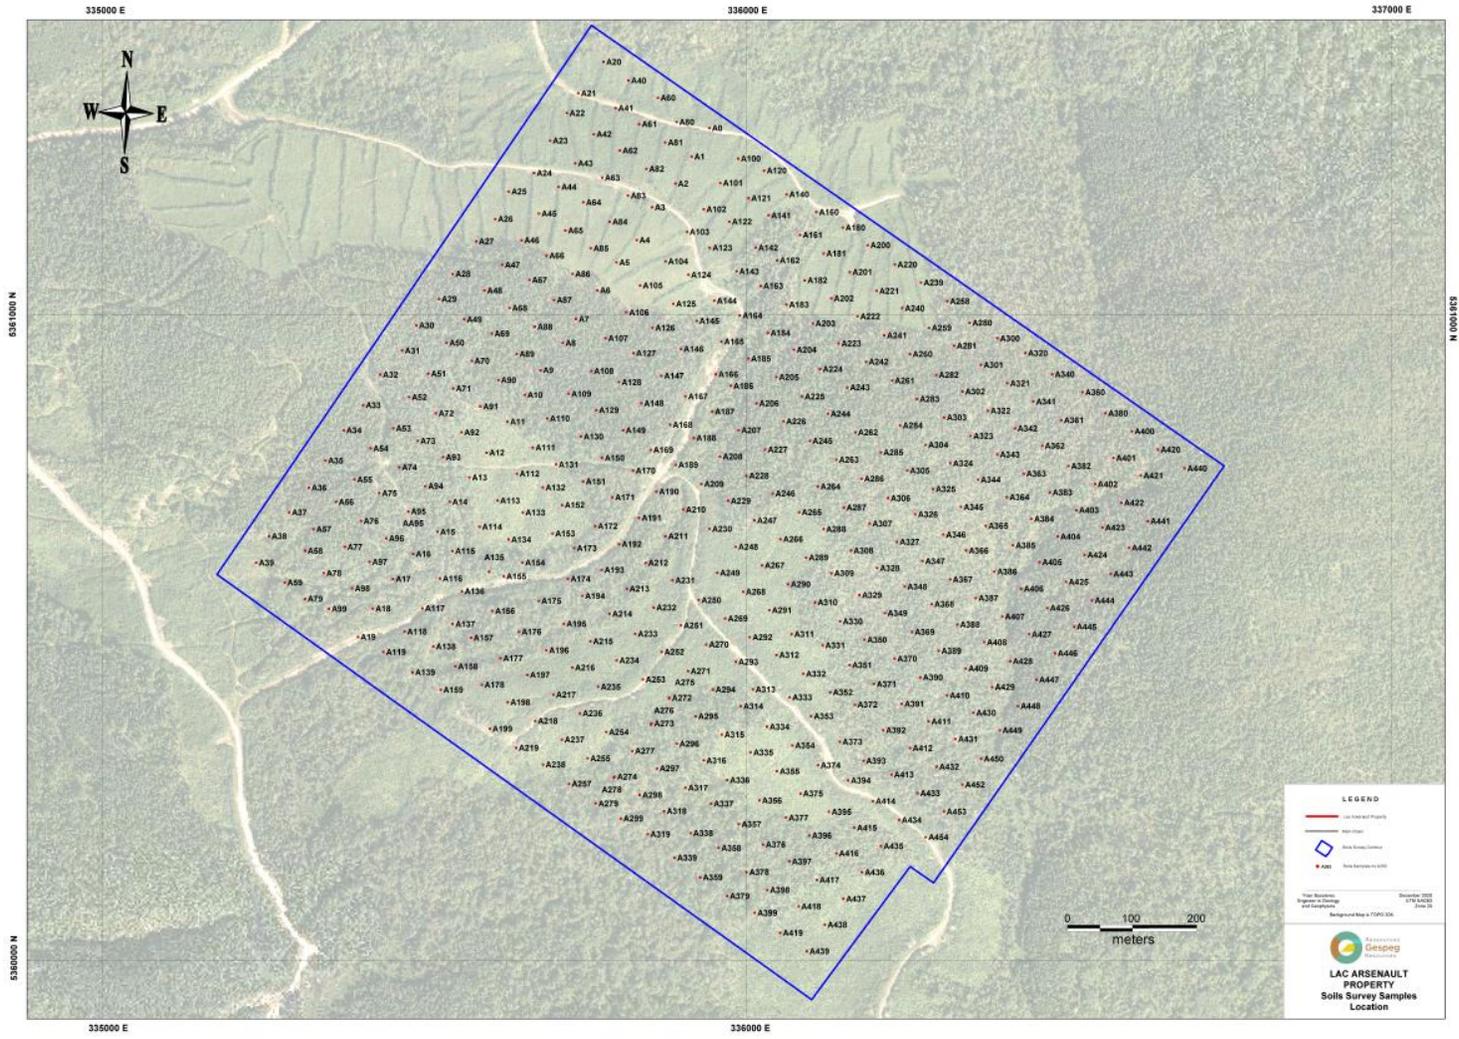


Figure 26 : Location of soil samples (1844)

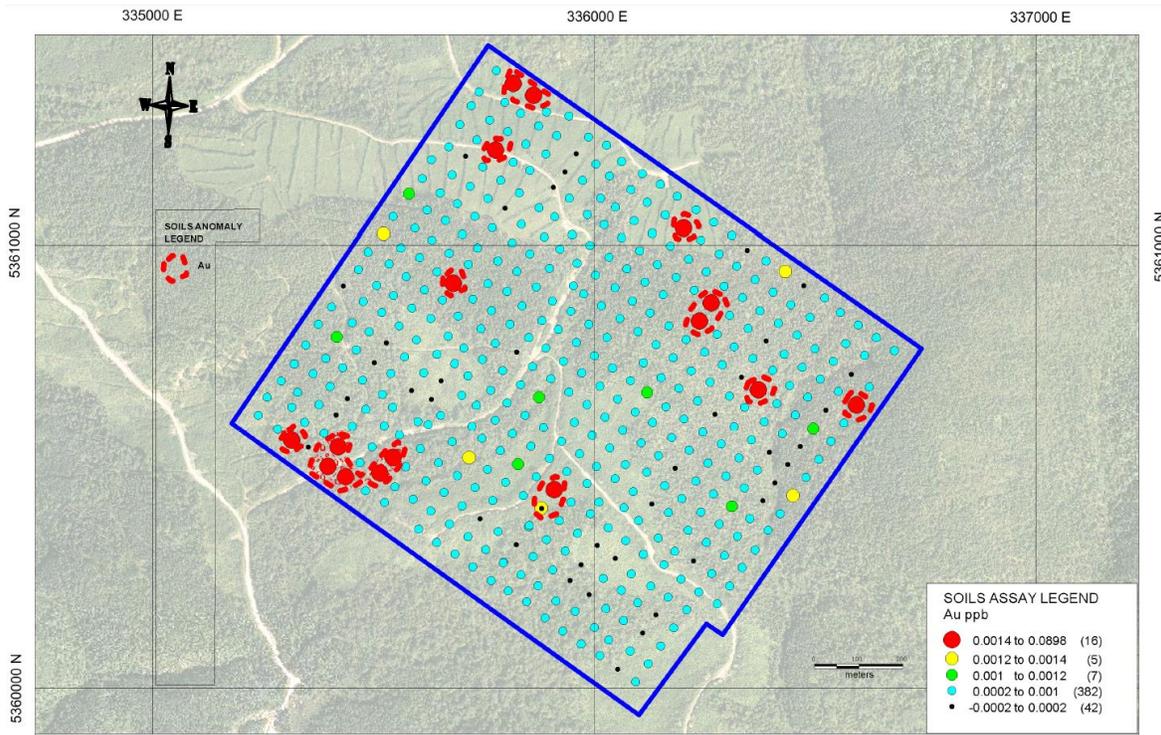


Figure 27 : Soil samples and Au (ppb) results (1844)

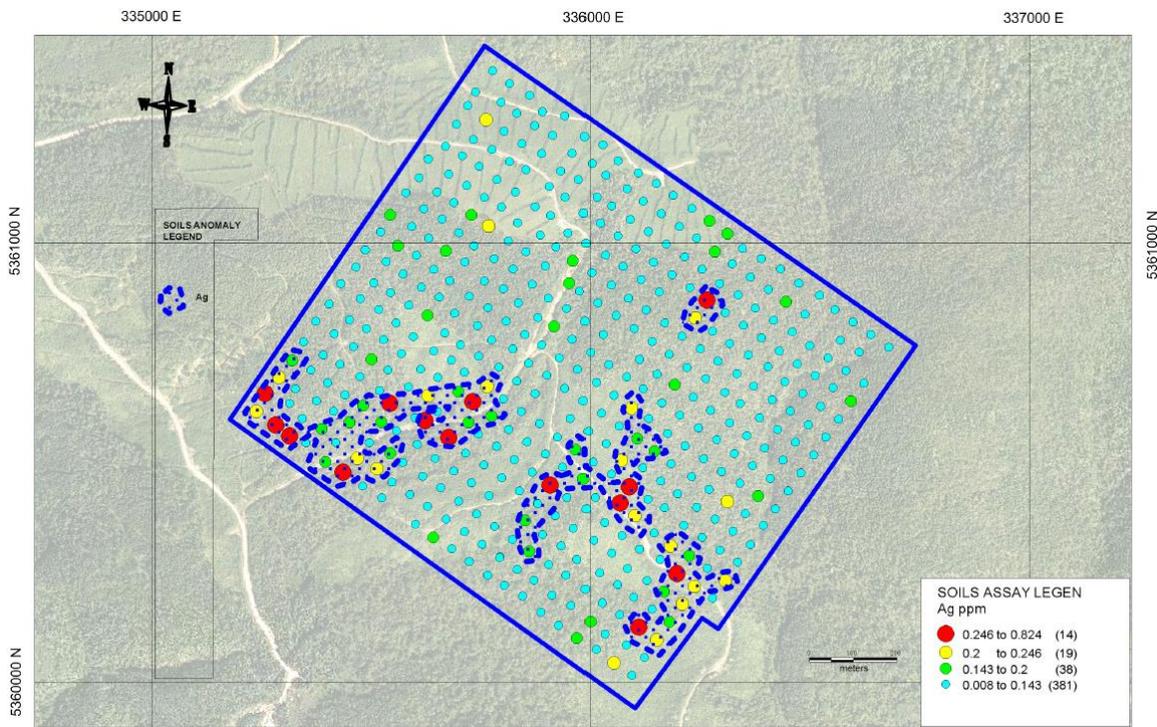


Figure 28 : Soil samples and Ag (ppb) results (1844)

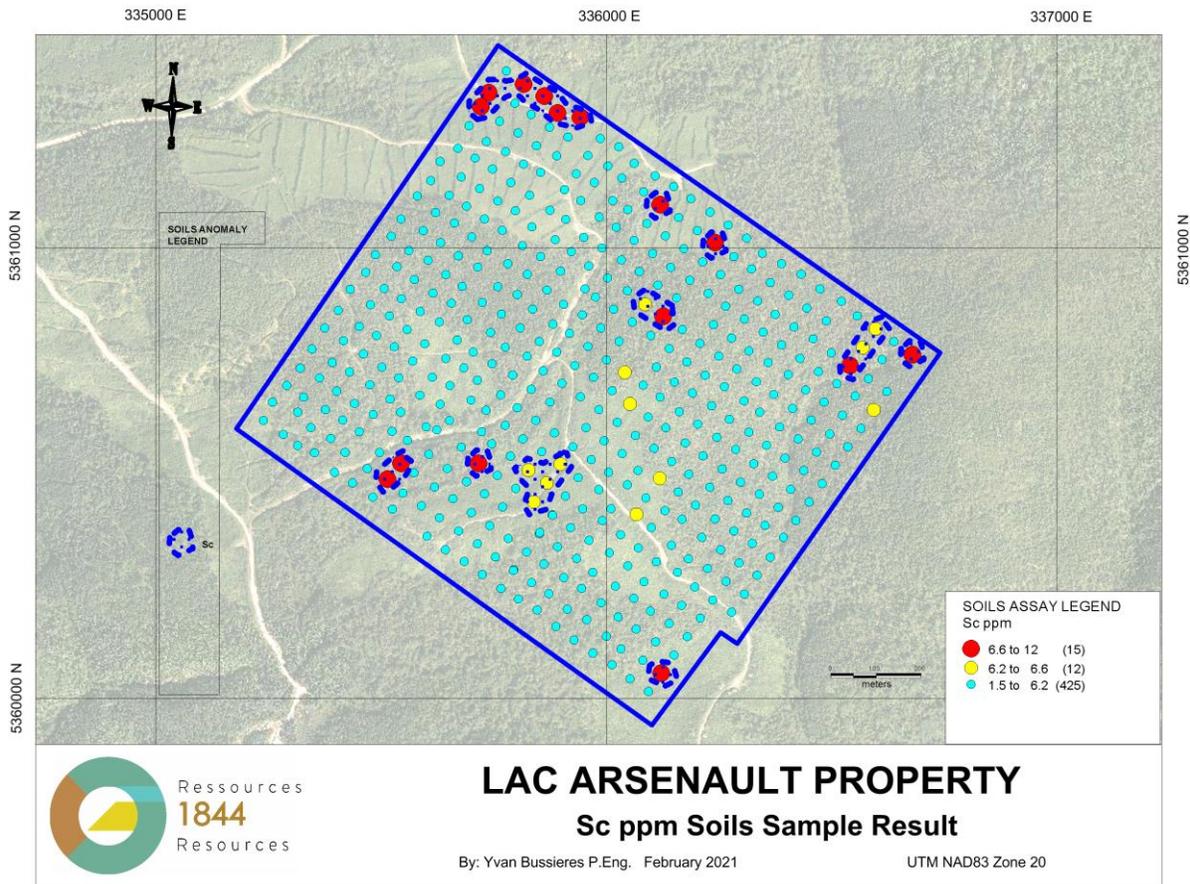


Figure 29 : Soil samples and Sc (ppm) results (1844)

Table 7 : Class of value per element

Element	Total no. of samples	Min	Median value	Anomalous threshold	High percentile	Max
Au_ppm	452	-0.0002	0.0004	0.0012	0.001447	0.0898
Ag_ppm	452	0.008	0.064	0.143	0.24504	0.824
Al_%	452	0.41	2.6	5.3435	5.3435	6.54
As_pmm	452	1.38	6.6	22.5	50.429	348
B_ppm	452	-10	N/A	10	10	10
Ba_ppm	452	17.3	45	100	252.47	517
Be_ppm	452	0.11	0.4 & 0.7	0.97	1.2241	2.38
Bi_ppm	452	0.0686	0.17 & 0.22 & 0.25	0.27	0.29776	0.895
Ca_%	452	0.01	0.02	0.1	0.4047	1.04
Cd_ppm	452	0.012	0.1	0.24	0.36152	1.87
Ce_ppm	452	9.8	32	52	59.329	132.5
Co_ppm	452	1.97	8	16	18.5675	40.1
Cr_ppm	452	12.15	67	102	105.97	130.5
Cs_ppm	452	0.347	1	1.9	2.6264	6.61
Cu_ppm	452	5.43	17 & 29.6	31.5	34.235	56.7
Fe_%	452	1.87	5.4	8.2	8.6641	11.6
Ga_ppm	452	2.85	11	15.5	16.0205	20.5
Ge_ppm	452	0.024	0.068	0.097	0.11094	0.53
Hf_ppm	452	0.004	0.026 & 0.064 & 0.1	0.124	0.15488	0.274
Hg_ppm	452	0.012	0.088	0.18	0.19682	0.563
In_ppm	452	0.01	0.04	0.06	0.064	0.126
K_%	452	0.04	0.07	0.11	0.11	0.15
La_ppm	452	3.11	14	26	29.641	151.5
Li_ppm	452	0.9	23	57	60.441	84.8
Mg_ppm	452	0.05	0.08 & 0.4	0.87	0.94	1.3
Mn_ppm	452	80.1	250	800	1667.05	4820
Mo_ppm	452	0.1	0.23	0.5	1.4894	2.18
Na_%	452	-0.001	0.004	0.009	0.009	0.012
Nb_ppm	452	0.114	0.48 & 1.16	1.05	1.79145	4.47
Ni_ppm	452	11.35	40 & 79	108	122	195
P_%	452	0.021	0.1 & 0.18 & 0.25	0.313	0.35594	0.523
Pb_ppm	452	4.89	13.6	20.5	30.982	448
Pd_ppm	452	-0.001	N/A	0.003	0.003	0.012
Pt_ppm	452	-0.002	N/A	2	-0.002	0.007
Rb_ppm	452	6.81	17.2	24.4	25.147	36.6
Re_ppm	452	-0.0002	0.0003	0.0003	0.0003	0.0018
S_%	452	0.01	0.03	0.07	0.07	0.09
Sb_ppm	452	0.077	0.192	0.31	0.40793	0.541
Sc_ppm	452	1.535	3.92	6.2	6.6347	11.95
Se_ppm	452	0.07	0.5	1.15	1.2547	1.795
Sn_ppm	452	0.29	0.8	1.25	1.25	2.54
Sr_ppm	452	1.34	3.4	9.4	28.429	58
Ta_ppm	452	-0.005	0.09	0.01	0.01	0.017
Te_ppm	452	0.011	0.038	0.06447	0.06447	0.096
Th_ppm	452	0.343	3	4.8035	4.8035	6.45
Ti_%	452	0.001	0.006	0.019	0.027	0.084
Tl_ppm	452	0.062	0.124	0.184	0.184	0.474
U_ppm	452	0.143	0.38	0.63	0.74652	4.76
V_ppm	452	28.6	56	94	97.163	141.5
W_ppm	452	0.012	0.044	0.08	0.09447	0.272
Y_ppm	452	1.44	3.2	5.3	16.8675	137
Zn_ppm	452	18.4	65	126	140.47	230

9.3 Recent work by Canadian Gold & 1844

9.3.1 Mapping & Prospection 2023

Bernard Olivier Martel has carried out a prospection campaign and prepared areport in November 2023 for 1844 & Canadian Gold Ltd.

The small program occured with mapping and tracing over 19670m. no samples for gold were taken.

56 stations of outcrop point were identified and visited. The following maps present the traverses and points.

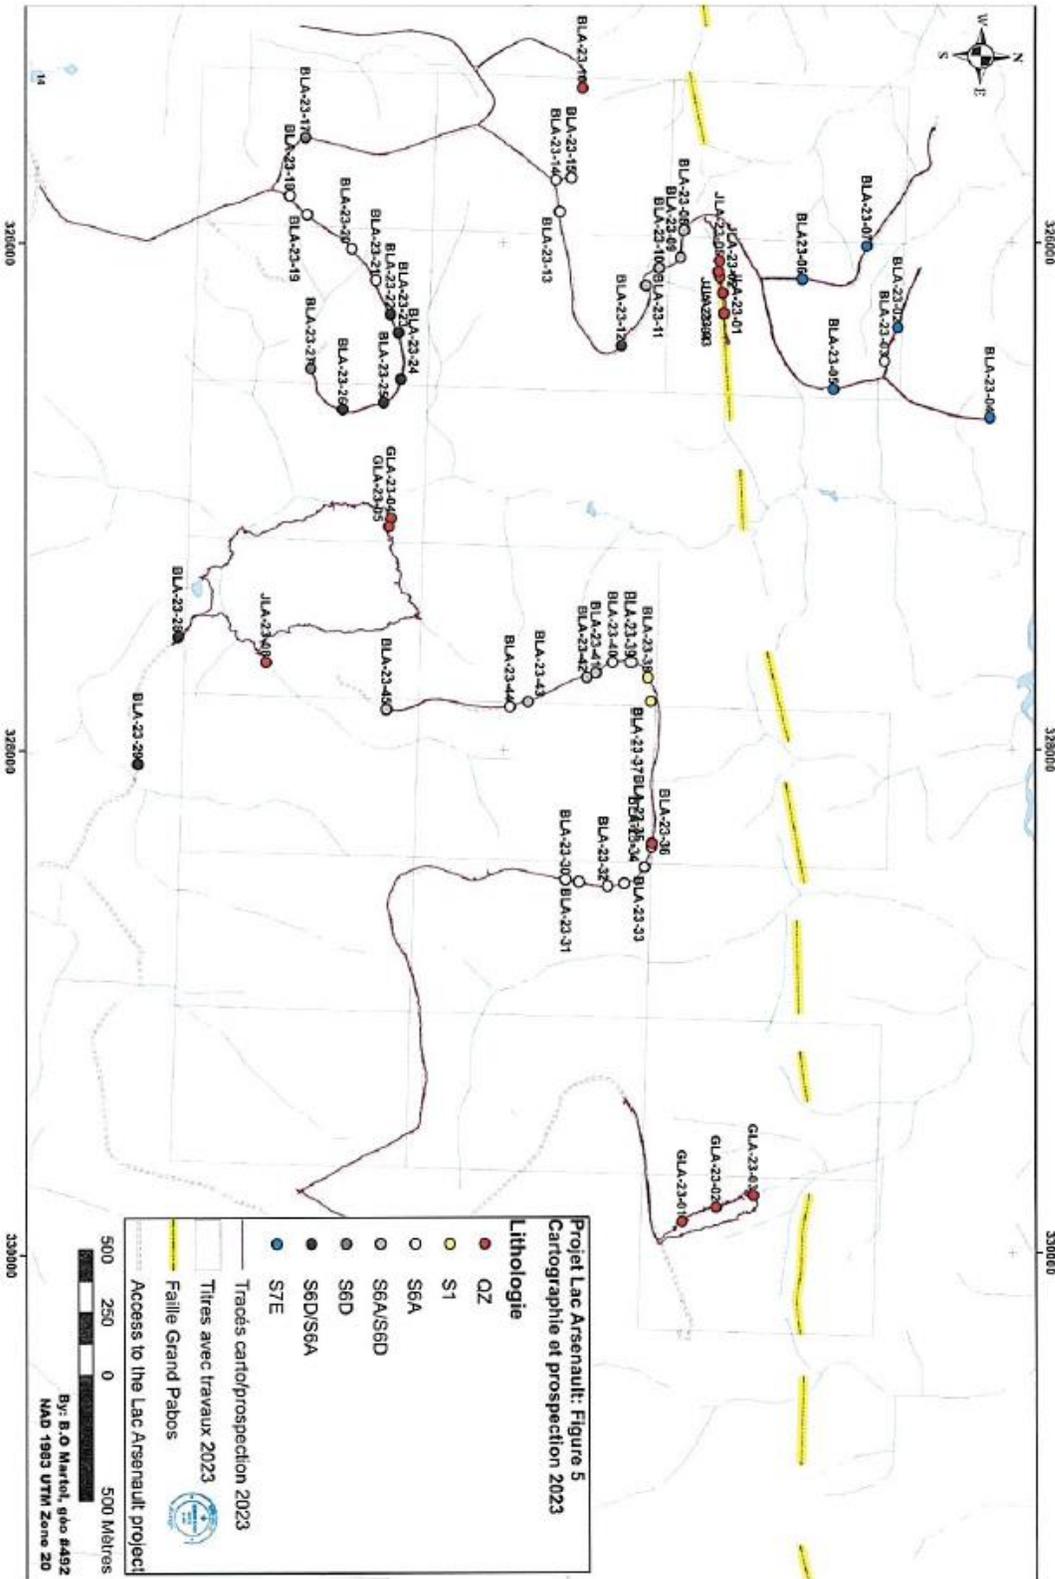


Figure 30: Traverse and sample points (B.O. Martel 2023)

9.3.2 GoldMinds site visit of June 2024

A site visit by the QP Claude Duplessis Eng. and Hortense Côté B. Sc. was done on June 12 as a preface to this technical report. There was no material changes since its last visit. Access were verified and confirmed as well as validation that mineralization is already stripped for the bulk sample. Zones were marked with Orange Fluorescent paint and approximative width for the future bulk sample location.

Composite samples were taken for future tests.



Figure 31: Duplessis marking sample bag and vein in the steep slope

Nice mineralization banding in the Mersereau vein in the abrupt slope following pictures.



Figure 32: Mersereau Vein in steep slope



Figure 33: Close-up view of vein mineralization

10 Drilling (Item 10)

Historical (PREVIOUS PROPERTY OWNER) Neither Amseco Exploration Ltd. (Issuer) nor Canadian Gold Resources Ltd. (Target) have done exploration or drilling on the property. Except sampling of a 30 kg composite in June 2024 for Metallurgical testing and soil sampling in 2023.

10.1 Historical drilling

There has been various exploration campaign over time in the past, all these are considered historical and can not relied upon as not verified and some data is missing.

The database used in CSV format composed by 93 drillholes (totaling 7269.41m, three drillholes named 86-1, 86-2 and 86-35 not covered by the mining claims), 19 deviations data, 601 assays and 421 lithologies data (Figure 34). All collar survey coordinates are presented in UTM (Zone 20, NAD83; Figure 34). The database was provided by Bernard Olivier Martel geo of 1844.

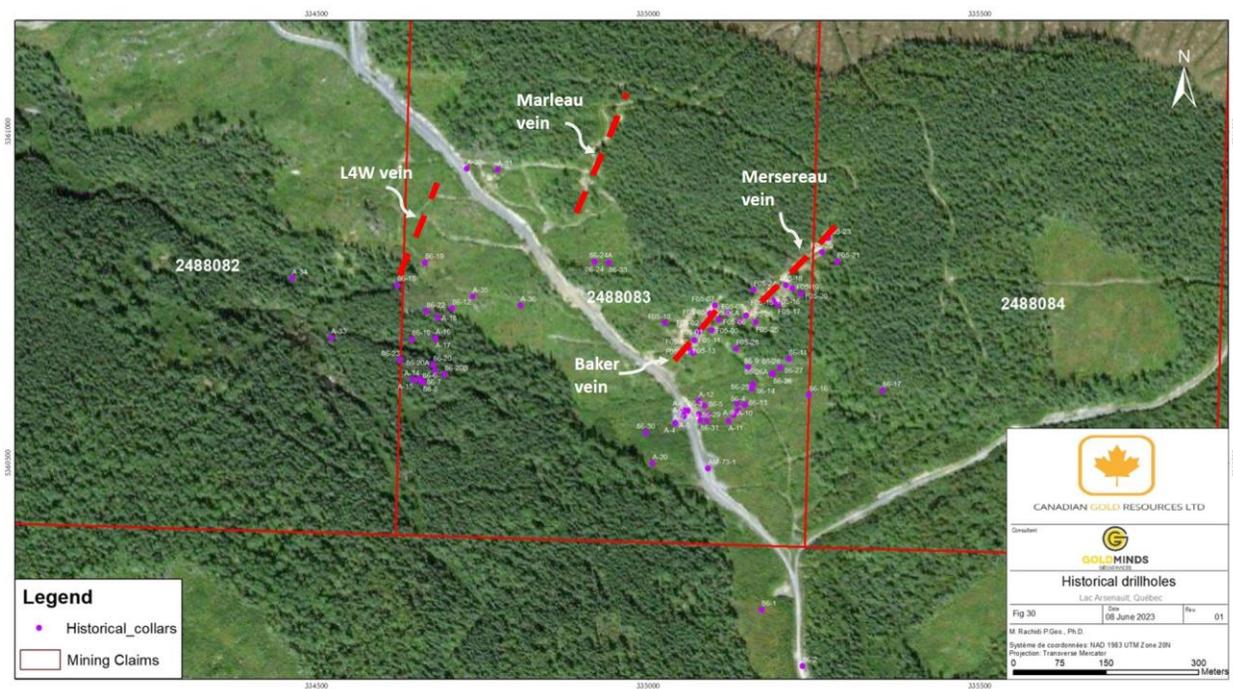


Figure 34: Historical drillholes

In September 2001, two holes (SER-T-2001-01 and -02) were drilled of 100 feet each to test the N-S structures within Nadeau fault. Holes are located in Zone A (SER-T-2001-01 2+93N, 2+47E and Zone B (SER-T-2001-02; 2+47N, 3+86E. No significant results were reported from these holes (Liboiron, 2001).

In 2005 Ressources Appalaches concluded with Scorpio Mining Corporation the option to acquire a 51% interest in the Lac Arsenault property. A drilling program started in august 2005 and consist of 29 holes totaling 1721.4m (Table 8). All these holes are concentrated on claims 2488083 and 2488084 (Figure 35).



Figure 35 : Drill holes location program 2005

Table 8 : Drill holes program 2005 information

Hole name	Easting	Northing	Elevation	Azimut	Dip	Length (m)
F05-01	335084	5360708	443	300	-48	42
F05-02	335084	5360708	443	300	-72	75
F05-03	335097	5360700	440	300	-69	100
F05-04	335094	5360725	449	300	-45	42
F05-05	335094	5360725	449	300	-68	60
F05-06	335107	5360716	442	300	-64	80
F05-06A	335107	5360716	442	300	-57	33
F05-07	335101	5360737	452	300	-74	54
F05-08	335120	5360726	448	300	-60	72
F05-09	335077	5360698	438	300	-60	60

Hole name	Easting	Northing	Elevation	Azimut	Dip	Length (m)
F05-10	335026	5360711	434	120	-45	39
F05-11	335070	5360685	432	300	-70	65,4
F05-12	335062	5360673	428	300	-45	45
F05-13	335062	5360673	428	300	-63	60
F05-14	335068	5360665	428	300	-64	78
F05-15	335196	5360739	476	300	-47	45
F05-16	335189	5360744	476	300	-45	33
F05-17	335196	5360739	476	300	-63	60
F05-18	335208	5360768	486	300	-45	30
F05-19	335218	5360763	488	300	-55	54
F05-20	335231	5360755	489	300	-62	90
F05-21	335286	5360803	498	300	-45	43
F05-22	335263	5360818	500	300	-45	75
F05-23	335272	5360839	503	300	-45	69
F05-24	335160	5360761	468	120	-45	27
F05-25	335163	5360712	454	300	-45	35
F05-26	335148	5360722	453	300	-45	42
F05-27	335139	5360714	451	300	-47	33
F05-28	335133	5360672	443	305	-62	180

This drilling program has mainly focused on the Baker and Mersereau veins to verify their gold content as well as their extensions (Figure 35). The best drilling results come from the Baker vein with 7.2 g/t Au over 3 m and 14.7g/t Au over 0.7 m, respectively in drill holes F05-01 and F05-07. The Mersereau vein obtains a maximum grade of 6.74 g/t Au over 40 cm in hole F05-17 (Table 9).

Table 9 : The main mineralized intervals intersected during 2005 dilling program

Hole name	From	To	Length	Au g/t	Ag g/t
F05-01	31.5	32.2	0.7	16.85	96.2
F05-01	33.7	34	0.3	3.77	32.4
F05-01	34	34.55	0.55	15.9	115
F05-02	46.9	47.15	0.25	14.95	151
F05-03	56.7	56.9	0.2	11.95	51.1
F05-05	46.7	47.5	0.8	4.62	16
F05-07	44.05	44.3	0.25	9.47	358
F05-07	44.3	44.5	0.2	19.65	25.7
F05-07	44.5	44.7	0.2	16.15	65.6
F05-15	34	34.4	0.4	5.37	13.9
F05-17	47.2	47.6	0.4	6.74	45.2

F05-24	25.1	25.6	0.5	4.83	5.3
F05-28	104	104.5	0.5	7.43	74.3

10.2 Surface diamond drilling

In 2021 the company start a diamond drilling program at the Lac Arsenault property. The drilling program consist of eleven holes drilled on three claims (2488082, 2488083 and 2488084) totaling 1951.9 metres (Figure 36). A total of 366 assay intervals (not including blank, standards and duplicate) totaling 376.4 meters were taken from NQ cores size and 54 QAQC control samples. The samples were analyzed by ALS laboratory at Val d’Or, Québec.

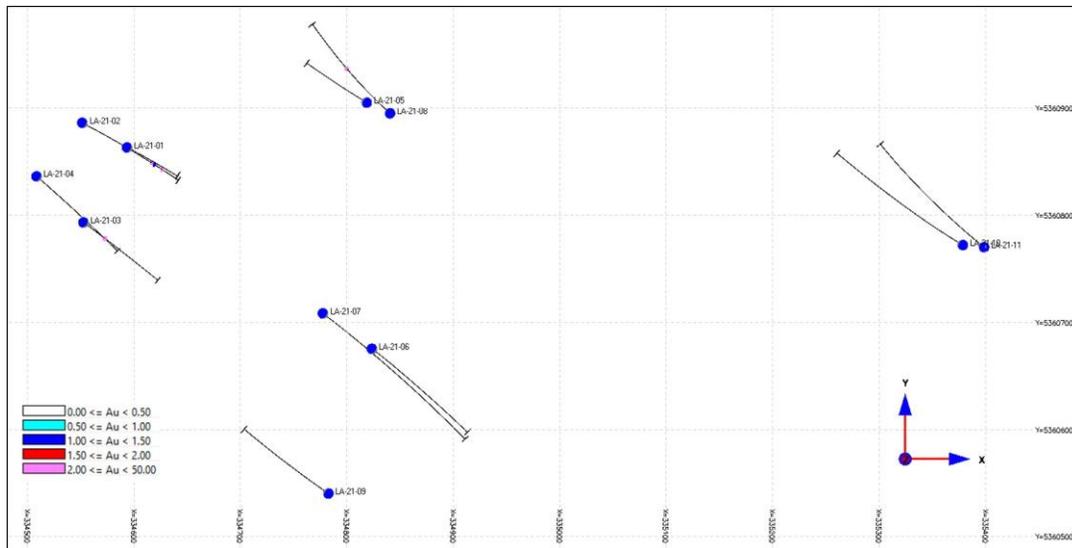


Figure 36: Collars location, drilling program 2021

Table 10 : Summary of the drilling program 2021

Hole Name	Easting	Northing	Elevation	Azimuth	Dip	Length	Hole Type
LA-21-01	334593	5360864	395	116	-45.5	78	DDH
LA-21-02	334551	5360887	392	118	-45.5	150	DDH
LA-21-03	334552	5360794	375	125	-45	123	DDH
LA-21-04	334508	5360837	372	129	-44	142.7	DDH
LA-21-05	334818	5360906	433	300	-45	96	DDH
LA-21-06	334823	5360676	382	126	-45	165	DDH
LA-21-07	334777	5360709	380	126	-45	252.2	DDH
LA-21-08	334840	5360896	432	310	-65	261	DDH
LA-21-09	334782	5360541	379	304	-45	138	DDH

LA-21-10	335378	5360773	503	300	-52	225	DDH
LA-21-11	335398	5360771	502	308	-66	321	DDH

Several pyrite-rich intervals were intersected within quartz veins and returned gold-bearing sections. The table below (Table 11) show the high grade intervals intersected during the 2021 drilling program.

Table 11: The high grade intervals intersected during 2021 drilling program

Hole Name	From	To	Sample Number	length	Au	Ag	Cu	Co	Pb	Zn	Ni
LA-21-03	34.4	34.7	X340188	0.30	3.23	8.91	220	7.6	5140	3010	29.6
LA-21-03	34.7	35.8	X340190	1.10	2.23	2.63	120	0.8	175	4410	5.6
LA-21-02	107.2	107.3	X340172	0.10	5.84	13.65	219	3.3	2140	92	32.7
LA-21-02	111.53	111.8	X340177	0.27	1.19	1.03	43.6	2.5	1460	39	16.3
LA-21-02	123.9	124.15	X340181	0.25	2.92	1.11	3.8	2.9	133	8	26.8
LA-21-08	138.9	139.07	X340442	0.17	2.02	1.39	15.3	10.7	39	73	89.9

11 Sample preparation, analysis and security (Item 11)

11.1 soil sampling

During the fall of 2020, 1844 Resources initiated soil surveys in the southern part of the property. The purpose of these soil surveys was to define exploration targets for gold (Au), silver (Ag), copper (Cu) and other minerals.

11.1.1 Sampling procedures

The purpose of soil sampling was to delineate zones of soil enrich with element from weathered underlying mineralized zones. The soil samples are collected with a special tool, a soil auger (Figure 37). The procedure for collecting a soil sample is as follows:

- Turn the auger down to take a first scoop of soil;

- Discard this first scoop of soil so as to eliminate any soil remaining in the auger scoop from the previous soil sample;
- Turn the auger down to take the second scoop of soil. If Horizon B is not reached, discard the soil and repeat the filling process;
- When the Horizon B soil is reached, put a Baggies-type plastic bag over your hand to avoid touching and contaminating the soil with your hand;
- Put the Horizon B soil into a soil sample bag. A soil sample bag is a special small brown paper bag numbered on both sides with a red marker so that the sample number can be read even when the bag is wet and darkened with soil;
- Taking note of the parameters of the soil sample, like soil color, humidity, texture, % of coarse material, shape of material and type of topography of the sample site;
- Fold the Baggies-type plastic bag over the paper soil bag to avoid contamination during transport in the backpack and to the lab;
- Tie a numbered ribbon at the sampled site;
- Take a GPS reading of the location of the sampled site.



Figure 37 : Soil sampler Auger (example)

11.1.2 Samples preparation and analysis

A total of 481 soil samples were collected. The soil samples were analysed by ALS Chemex of Val-d'Or using the ME-MS41L method for Au, Ag, Al, As, B, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, Hg, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Pt, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn and Zr.

When the soil samples arrived at the laboratory, the soil paper bags were taken out of the plastic bags and hung to dry. Once dried, the soil was screened with a 180-micron sieve. The small fraction was entirely crushed to less than 2 mm. A 250-gram representative portion of the sample was crushed to less than 75 microns.

The soil samples were assayed using ALS Chemex's ME-MS41L1 assay method. This assay method is an Aqua Regia extraction with ICP-MS finish. The assay is performed using 0.5 grams of the 75-micron fraction. The samples are digested with concentrated nitric acid for half an hour.

After cooling, hydrochloric acid is added to produce Aqua Regia and the mixture is then digested for an additional hour and a half. If molybdenum is to be measured, an ionization suppressant is added. The resulting solution is diluted to 100 or 250 mL with demineralized water, mixed and then analysed by ionizing the solution with inductively coupled plasma mass spectrometry (ICP-MS) against matrix-matched standards.

11.2 Drilling

11.2.1 Core sampling procedures

All logging activities took place at the core shack located on Lac Arsenault's property following procedures further described herein. At reception, all core boxes were stacked on tables where quick logging is performed (Figure 38). Once complete, they are then palletted and stored within the fenced property until the full complete log is performed. All meterage wood blocks were verified to control core box numbers and any possible mistakes made during drilling procedures.

Sample length average is of around 1 meter with a maximum length sample is 2.05m and a minimum length sample is 0.07m.

Numbered sample tags were placed at the beginning of each sample, together with distinctive arrows on the core marking the beginning and end intervals. The tag numbers are integrated in the database on GéoticLog software.

Blanks and standards tags were inserted and each batch of 20 samples includes at least one standard and one blank.



Figure 38 : Drill core boxes (hole LA-21-01)

- **Sample preparation**

All core samples were cut in half using the wet cutting saw for rock at 1844 Resources Inc's facilities. For all samples, half of the core was retained and placed back in the core box, respecting the original orientation and position. Sample tags were stapled to the bottom of the box at the beginning of each sample interval, so that each sample could be relocated following future handling, transportation and storage.



Figure 39: Electrical saw used for cutting the core samples

The core was cut using a rock saw, with one half placed in a plastic bag with the sample tag and sealed, while the second half was returned to the core box for storage on site. Except for the highly

mineralized zones the core samples were totally sent to the laboratory for assaying and were not splitted to let the second half core for the archive.

All samples were securely bagged and sealed with plastic zip-ties in translucent plastic bags before being placed, by group of seven (7) to nine (9), in much larger rice bags. All rice bags were shipped to ALS laboratory (Val d'Or, Québec), for gold fire assay (FA ICP-AES finish), silver by aqua regia digestion and multi-elements (ICP-AES).

Sample submittal forms were included in emails informing the laboratory of the date and method of expedition of every shipment made regarding these samples. Shipped samples were received in good standing.

The drill core samples of the mineralized intervals less than 25 cm length were not splitted and were totally sent to the lab for assaying. This later do not reflect the best practice of drill holes sampling. Even in the mineralized intervals the core has to be cut in half with one half to the lab and the other half to be archived for future use.

All drill holes boxes are then orderly stored on the racks located outside on Lac Arsenault's property.

11.2.2 Sample preparation at the laboratory

After the reception of core samples, they were dried at 80°C in a forced air circulation system, then crushed to > 70% passing 2 mm using low chrome steel jaw plates. Then samples were split using a rotary splitter to obtain 2 portions (pulp and reject). Samples were then pulverized to >85% passing 75 for multi element analysis. Two aliquots were riffled from the minus fraction and submitted for analysis (weight of these aliquots is around 50g). The grade was calculated with the contribution of each fraction weight.

11.3 Quality Assurance/Quality Control (QA/QC) program

11.3.1 Drilling program

A QA/QC program was established by the 1844 Resources Inc. geologist. This procedure included the addition of blanks, certified standards (STD1 = Oreas 603b and STD2 = Oreas 606) and duplicate (Figure 40, Figure 41 Figure 42 and Figure 43). The blanks and standards were inserted into each batch of 40 samples (Blank. STD1. Blank. STD2. Blank. etc.). In addition, a duplicate sample was inserted every batch of 20 samples. The control samples were inserted on site to avoid mix-ups.

A total of eight standards samples were assayed and consist of Oreas 603b and Oreas 606. A total of 14 Blank samples, were inserted within core samples and consist of coarse silica.

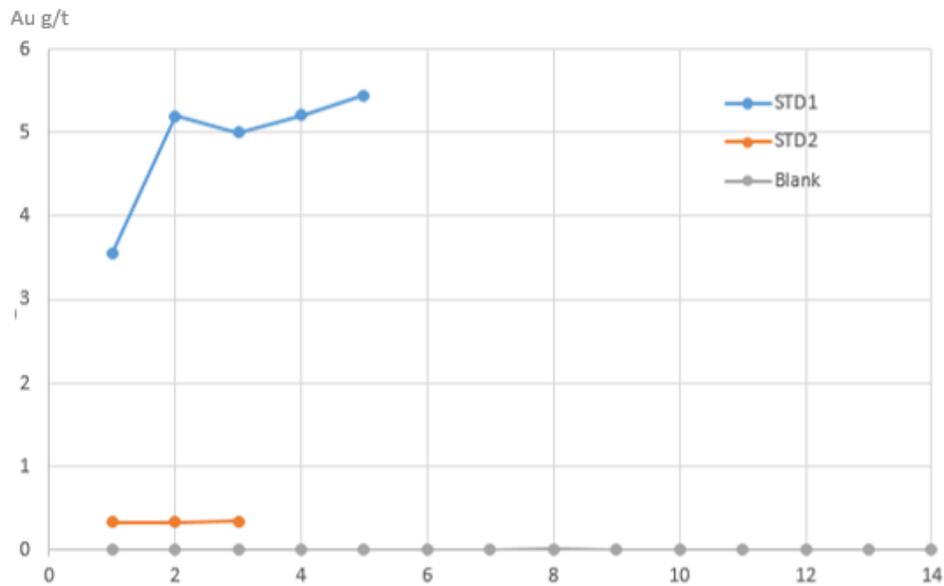


Figure 40 : Standards and blank samples, Au g/t

Figure 40, show the Au (g/t) assays distribution for the standards and blank samples. For STD1 we have 3 assays averaging 0.33 Au g/t and for STD2 the average is 5.2 Au g/t except for sample X340250 showing a value of 3.55 Au g/t which less than the certified value of 5.21 Au g/t.

A total of seventeen duplicate were inserted. Table 12, show the original assays and their duplicate (Figure 41, Figure 42 and Figure 43). There was no bias evident between original and duplicate drill core samples.

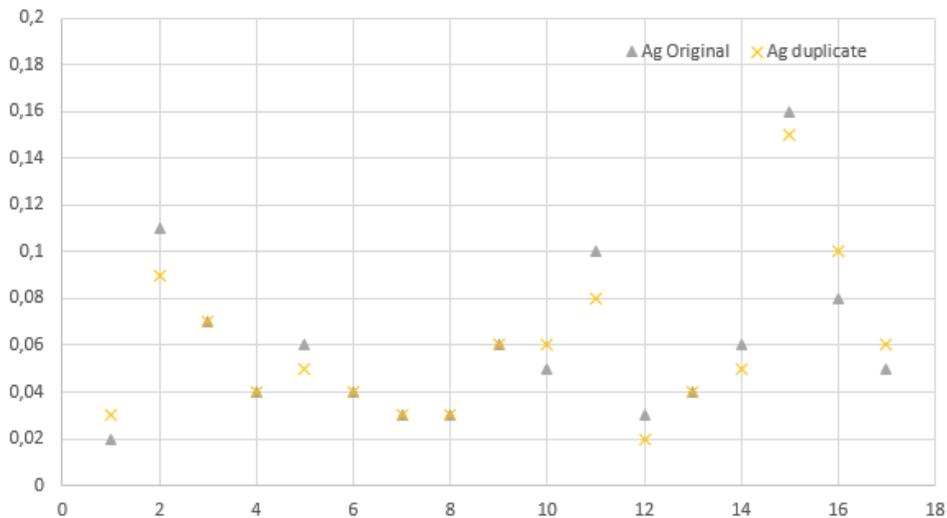


Figure 41 : Original assays and duplicate Au g/t

Table 12 : Core sample original assays and their duplicates

Hole name	From	To	Sample	Assays			Duplicate			
				Au (g/t)	Ag (ppm)	Cu (ppm)	Sample	Au g/t	Ag (ppm)	Cu (ppm)
LA-21-02	15	15.5	X340160	0	0.02	19	X340159	0.004	0.03	19.5
LA-21-02	123	123.9	X340180	0.012	0.11	22.2	X340179	0	0.09	22
LA-21-04	130.2	130.95	X340220	0	0.07	25.4	X340219	0.001	0.07	25.2
LA-21-05	62.5	64	X340260	0.004	0.04	21.5	X340259	0.005	0.04	22.6
LA-21-06	93.8	94.8	X340280	0.007	0.06	31.3	X340279	0.009	0.05	31.9
LA-21-06	116.1	117.2	X340300	0.0005	0.04	39.8	X340299	0.0005	0.04	40.4
LA-21-06	136	137.5	X340319	0.0005	0.03	23.5	X340318	0.0005	0.03	20.9
LA-21-06	159	160.2	X340340	0.0005	0.03	30.3	X340339	0.0005	0.03	30.4
LA-21-07	178.5	180	X340360	0.004	0.06	37.5	X340359	0.004	0.06	37.7
LA-21-07	198	199.5	X340380	0.001	0.05	37.8	X340379	0.001	0.06	36.2
LA-21-08	137.9	138.1	X340440	0	0.1	18.9	X340439	0	0.08	17.1
LA-21-08	183	184	X340480	0.00025	0.03	19.8	X340479	0.0025	0.02	18.8
LA-21-09	16.5	18	X340540	0	0.04	20.2	X340539	0	0.04	20.8
LA-21-09	113.2	114	X340560	0.001	0.06	32.9	X340559	0.001	0.05	34.3
LA-21-10	156	157.5	X340620	0.003	0.16	32	X340619	0.002	0.15	31.2
LA-21-11	65	66	X340640	0.001	0.08	26.4	X340639	0.001	0.1	27.5
LA-21-11	320.1	320.7	X340680	0.001	0.05	45.9	X340679	0.001	0.06	48.6

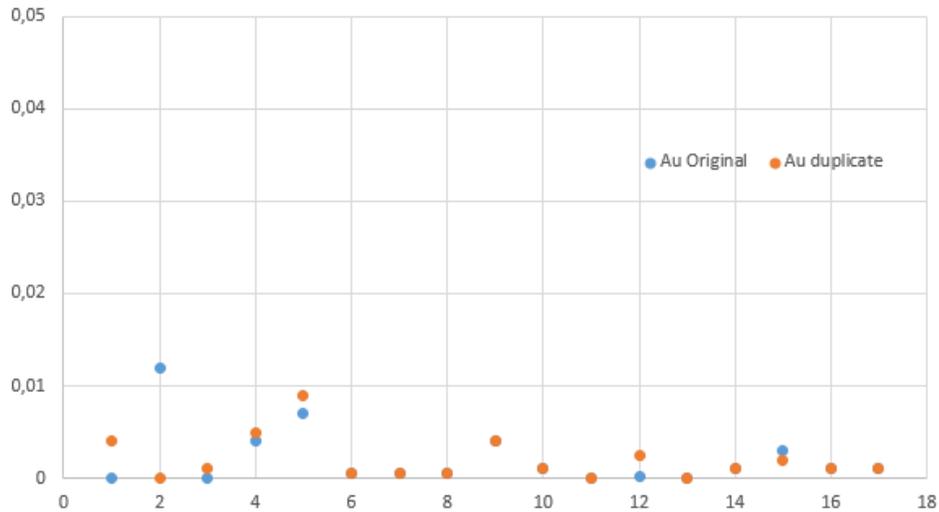


Figure 42 : Original assays and duplicate Ag g/t

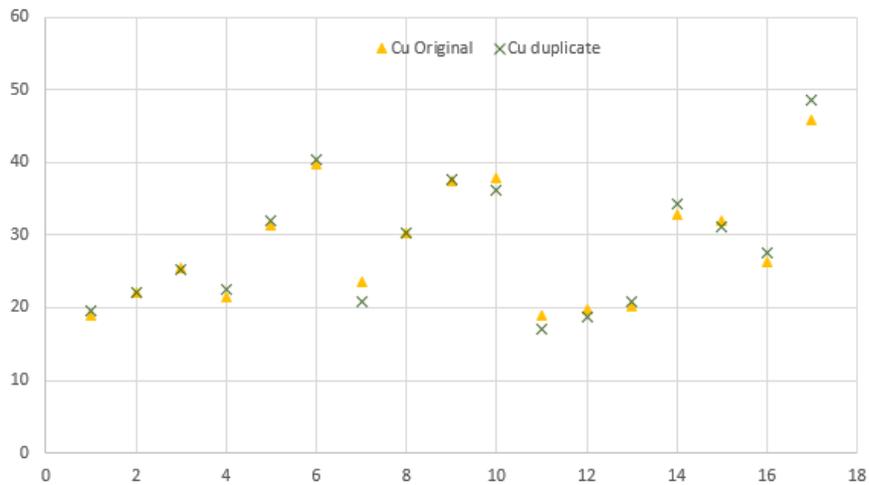


Figure 43 : Original assays and duplicate Cu ppm

The results from the combination of blank, standards and the internal QA/QC met the quality criteria, indicating that 1844 Resources Inc. can rely on these values for the sample program.

11.3.2 Soil sampling program

Soil sample assay quality control was enhanced by duplicate samples. The guideline was to duplicate a sample for each batch of 15 samples (Bussi eres, 2021). The duplicate consisted of a second soil sample taken beside the sample being duplicated. A total of 29 soil samples were duplicated during the soil survey. Assays versus duplicate assays show that the repeatability of assays was very good for all elements (Figure 44, Figure 46 and Figure 47).

Figure 44, shows the repeatability of Au, Ag, As and Pb, which is very good for these elements, and the correlation between high and low values of these elements is also good. Only some high values of Ag and Cu did not correlate with other elements of the assemblage, which simply indicates that these samples are mineralized in Ag and Cu, without gold association.

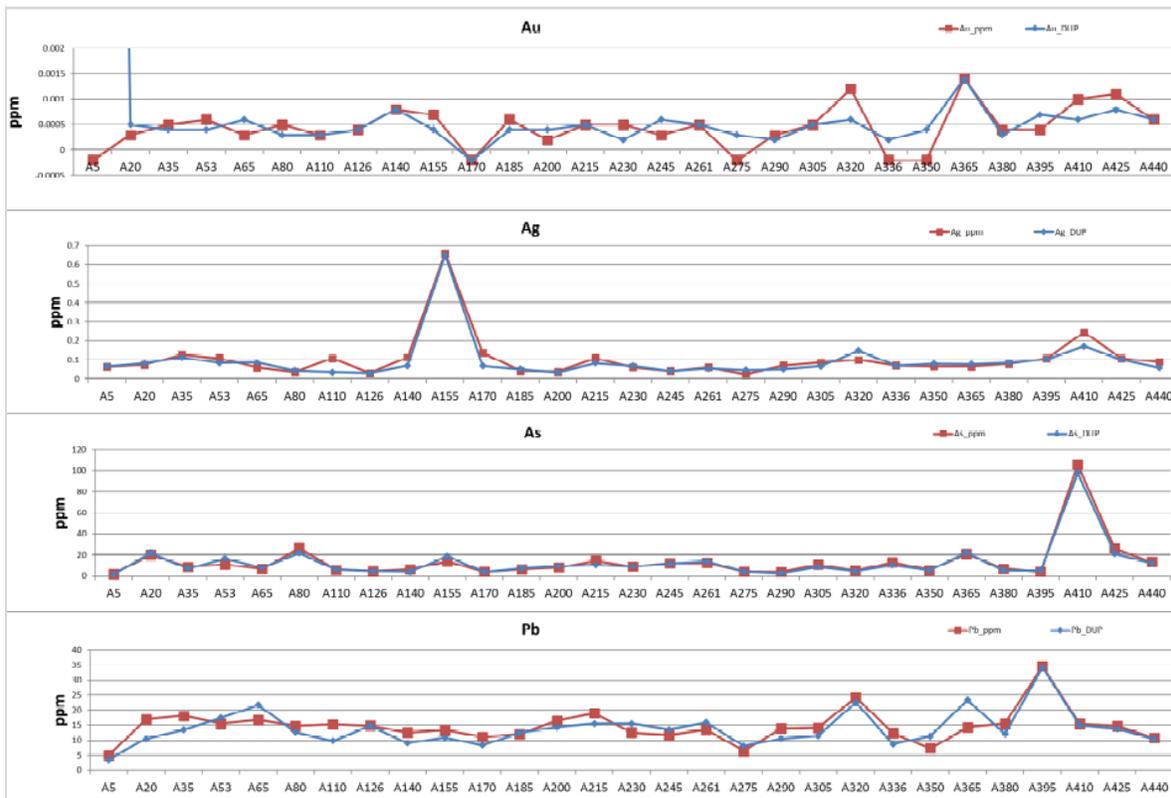


Figure 44 : Soil sample duplicate for Au-Ag-As-Pb assemblage.

Figure 46, shows the repeatability of Cu, Co, Ni and Zn, which is the correlation assemblage for mafic intrusions with sulfides. The repeatability is very good for these elements, and the correlation between high and low values of these elements is also very good, confirming the correlation assemblage.

Figure 47, shows the repeatability of Cr and Ti (the elements associated with ultramafic rocks), Mo (an element associated with some granitoid-type rocks) and Sb (an element of stibine, an antimony sulfide often associated with gold mineralization). The repeatability is very good for these elements. As outlined by the statistical study, these elements show no correlation between their high and low values.

The ALS Chemex internal laboratory quality control for each batch of 36 samples consists of assaying two blank samples; assaying three standard samples; and re-assaying one sample from the batch. A total of 104 soil samples were re-assayed by ALS Chemex. Assays versus ALS re-assays shows that the repeatability of assays was very good (Figure 47) and confirmed the repeatability of the assays performed at the ALS Chemex laboratory.

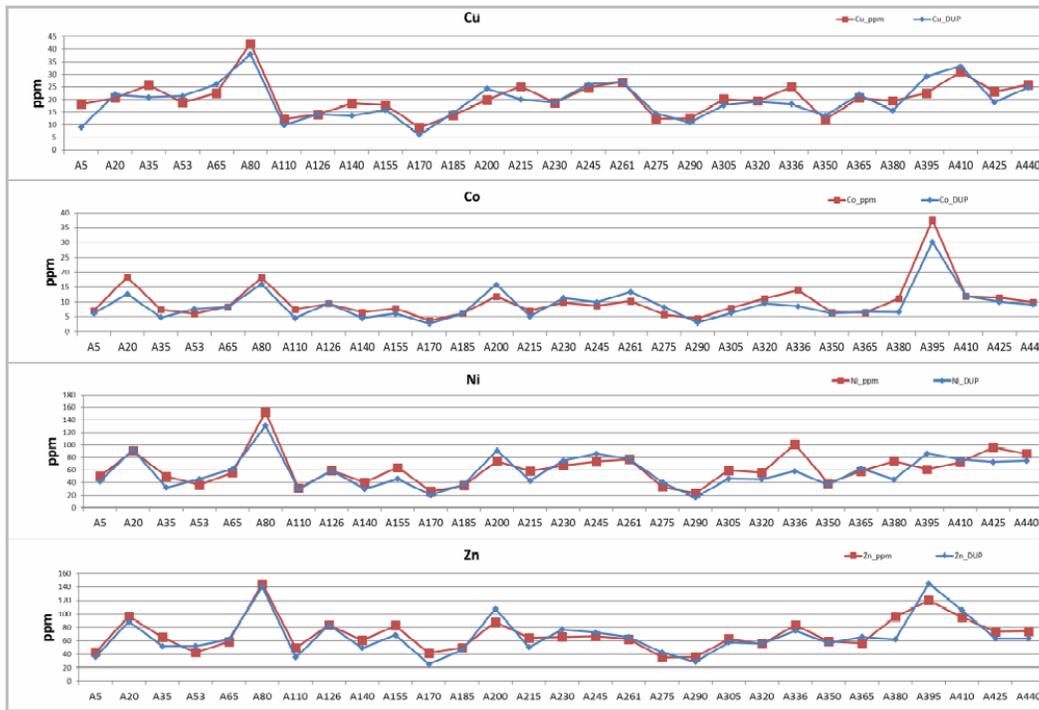


Figure 45 : Soil sample duplicate for Cu-Co-Ni-Zn assemblage

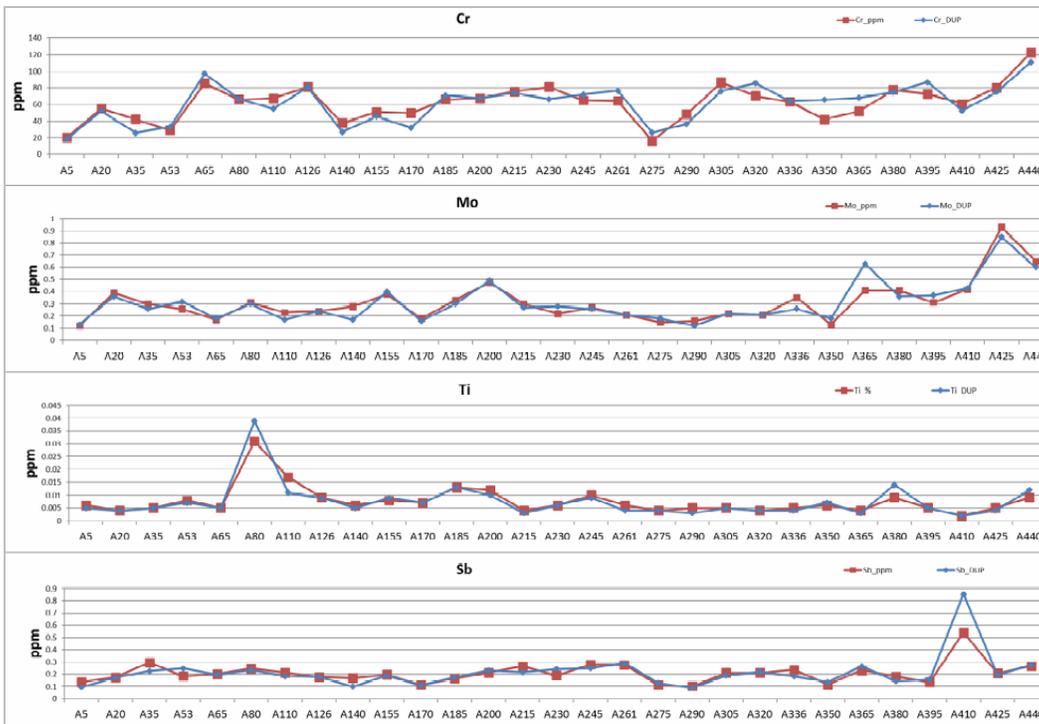


Figure 46 : Soil sample duplicate for Cr-Mo-Ti-Sb.

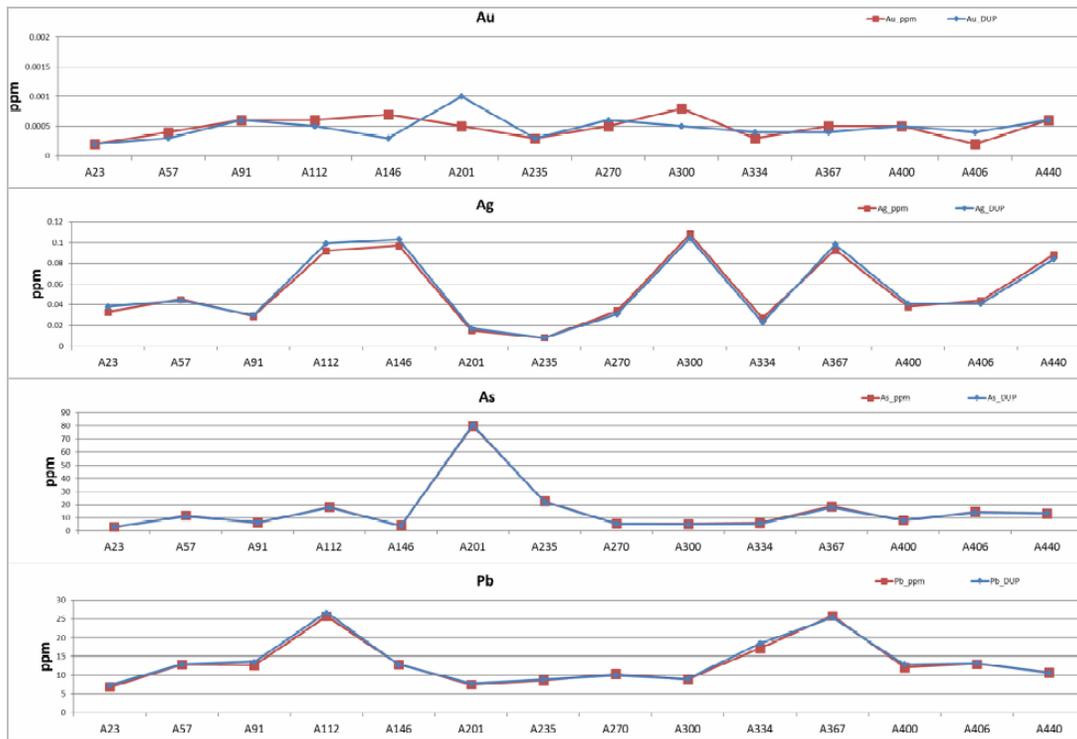


Figure 47 : ALS soil sample re-assays.

11.4 Security

The core sample preparation, handling and transport all followed a safety procedure that included a strict chain of custody from sampling to the laboratory.

The authors visited the independent ALS laboratory (at Rouyn Noranda, Québec). This laboratory is well-known in Quebec and Canada. It has a reliable industry reputation and the QA/QC support this affirmation.

The ALS Laboratory is an ISO-certified lab and is independent of the issuer and GoldMinds Geoservices.

The author believes that the sampling preparation, security, and analytical procedures were adequate and consistent with generally accepted industry best practices Except for assaying the total core from the mineralized intervals that do not respect the classic sampling method.

12 Data verification (item 12)

12.1 The database

The diamond drilling data were verified and validated by the authors, after that they have been integrated into the database. Claude Duplessis visited the property and used a portable GPS for collars location (Figure 48).

Downhole surveys (Reflex multi-shots taken every 3 metres) were available for all the holes used. The authors were granted access to the certificates of assays for the 2021 drilling campaign. No modifications were made to the database and it was considered valid and reliable.



Figure 48 : Drill hole location

The diamond drillhole collar locations were not yet surveyed with a Total Station. The geologist used a portable GPS for collars location. The collar surveys are considered adequate for the purpose of this report, but it is recommended that all collars be surveyed using a total station.

12.2 Site visit

Mr. Duplessis visited the property from July 28 to 30 July 2021 for previous owner Resources 1844. The site visit focused on the verification of the field data, independent sampling and the visit of the core shack situated in the Municipality of Paspebiac (Figure 49).

The location of several borehole collars in the main zone was verified in the field. No discrepancies were found between the location, numbering, or orientation of the boreholes verified in the field, on plans and in the database examined by the authors.

The issuer kept the core boxes from 2020 to current date in the core shack and the core boxes were in good condition and clearly identified (Figure 49), the samples tags were present. The wooden blocks placed at the beginning and end of each drill run still in the boxes and match the indicated footage on each box.



Figure 49 : A) Core shack racks; B) Core boxe showing tag sample at the end of the sample interval; C) Independent core samples taken by M. Duplessis for assay.

Mr. Duplessis examined core from several boreholes and found that the logging information accurately reflects actual core. The lithology contacts checked by Mr. Duplessis match the information reported in the core logs. During his site visit, Mr. Duplessis collected five core samples for independent verification. Another visit took place on June 12th 2024 see section Exploration for pictures.

12.3 QA/QC program

The exploration work and drilling program were conducted using documented procedures, and involved wide verifications and validation of exploration data. The authors analyzed the analytical quality control data produced by 1844 resources for the 2021 drilling program. The issuer's geologists implement industry standard measures designed to ensure the consistency and reliability of the exploration data (Table 13).

Table 13 : Summary of analytical quality control data produced by 1844 Resources inc.

	Core	%	Comment
Sample count	366	-	
Blanks	15	4,10	Coarse silica
Duplicate	17	4,64	
Standards	8	2,19	Oreas 603b and Oreas 606
Total quality control samples	40	10,93	

Analyses of blank materials consistently yielded gold values below 0.05 g/t gold. 1844 Resources used two certified reference materials (standards). All standards performed generally within expected ranges and mean grades are similar to expected values with only one standard sample (sample number X340250) showing less than the expected value.

All core samples were assayed in one laboratory (ALS) and no external laboratory used. GMG had access to the assay certificates and the geological logs. In general, the authors considers that the quality control program implemented during the drilling campaign meet industry best practices. The authors did not identify any accuracy or precision issues and concluded that the analytical data reviewed are acceptable.

12.4 Independent sampling

During the site visit Mr. Duplessis cannot review the mineralized drill holes intersections because the entire core were sent to the laboratory. The author mention that is not the good manner to proceed and the half core has to be kept in the core shack for future use. As part of the verification procedures Mr. Duplessis took five intervals for re-assays from two drill holes LA-21-11 and LA-21-05. The verification samples were collected by taking the remaining half core for assaying at SGS Canada inc. Minerals Services, Lakefield Ontario (SGS Lakefield), along with one control sample (standard with certified reference).

The table (Table 14), below show the comparison between the original assays and the SGS re-assays for control data quality. The control data quality shows a very small and a non significant variation.

Table 14 : Correlation between original assays and SGS re-assays control data for Au, Ag, Cu, Pb and Zn

Hole name	From	To	Length	SGS Minerals Services Geochemistry, Vancouver					ALS Canada Ltd.						
				Sample number GMG	Au g/t	Ag g/t	Cu ppm	Pb ppm	Zn ppm	Sample 1844	Au (g/t)	Ag (g/t)	Cu (ppm)	Pb (ppm)	Zn (ppm)
La-21-11	70	71	1.00	21910A		1	30.2	101	36	X340645		0.1	41.4	49	34
La-21-11	69	70	1.00	21911A		1	28.9	56	59	X340644	0.07	27.1	26.7	0.47	12.7
La-21-05	66.3	67.7	1.4	21912A		1	21.5	29	68	X340264	0.04	21.6	13.8	0.41	7.9
La-21-05	59.3	59.7	0.40	21913A		1	28.1	14	79	X340256	0.04	27.7	19.7	0.46	8.6
La-21-05	69	70.5	1.5	21914A		1	15.00	7	49	X340266	0.04	14.3	14	0.32	6

Such a small core samples collection cannot be considered representative to verify the gold grades obtained by 1844 resources Inc. Mr. Duplessis took also some surface samples (channels and grab samples). Table 15, show the assays results from three channels and three grab. Assay results for the verification samples confirmed the presence of gold showing a maximum value of 17.43 g/t Au and a minimum value of 6.04 g/t Au (Table 15, Figure 50).

Table 15 : Surface samples Assays (Au, Ag, Cu, Pb and Zn)

Location	Sample	Type	Au g/t	Ag g/t	Cu ppm	Pb %	Zn %	As %
L4W	21904A	channel		1	17	0.002	0.002	0.135
L4W	21905A	channel	6.04	17	387	0.803	0.269	1.870
L4W	21906A	channel	11.23	129	916	3.520	1.470	3.710
Mersereau	21907A	Grab	7.49	114	262	4.720	0.222	5.010
Baker	21908A	Grab	17.43	204	266	8.290	0.064	3.610
Marleau	21909A	Grab		1	9	0.047	0.002	0.949

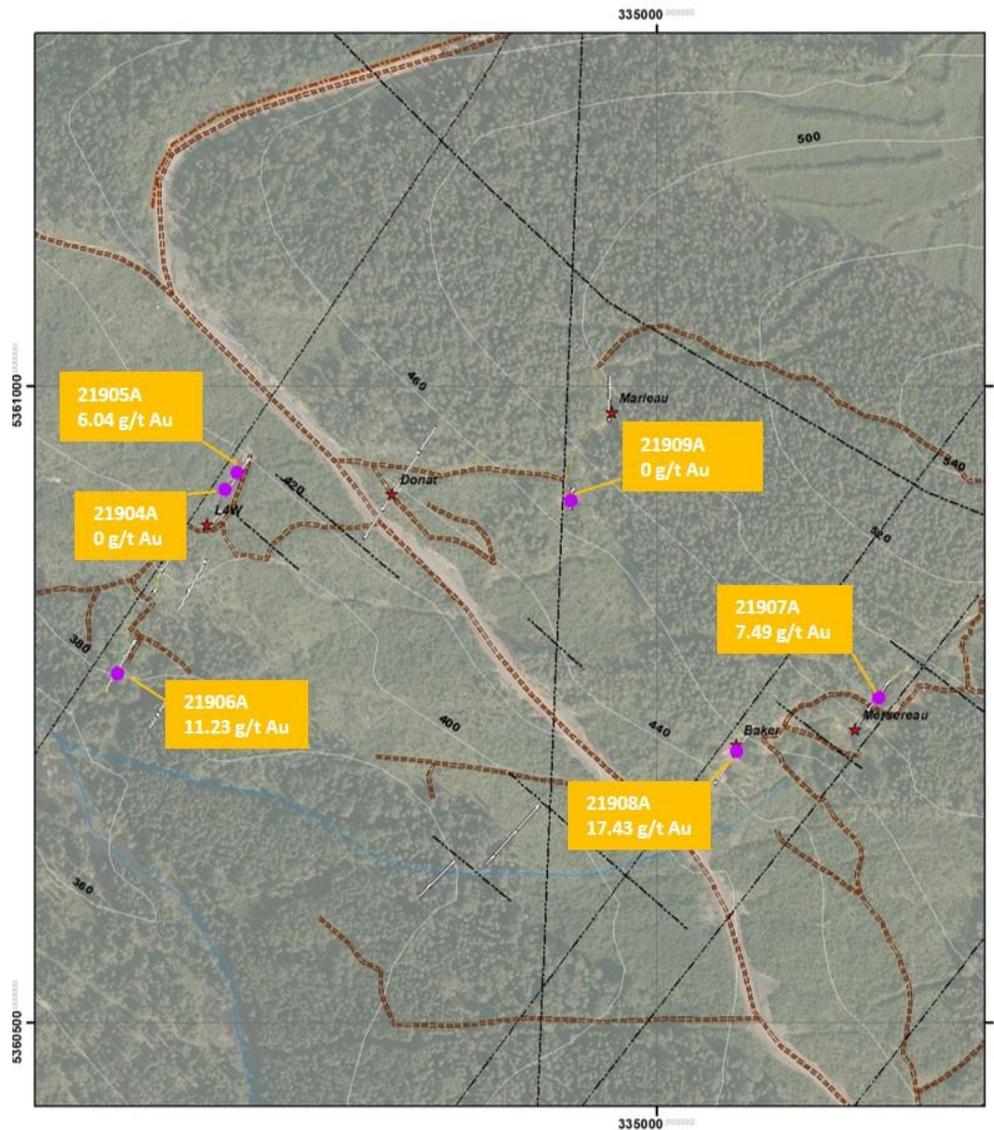


Figure 50 : Location of the independent surface samples, Lac Arsenault

Another site visit took place for Canadian Gold Resources Ltd. In June 2024. The purpose was to have a current site visit in addition to sampling of a representative composite along the veins to enable metallurgical testing. The samples have been submitted to SGS Québec laboratory at the moment of writing this report. Details of the independent current site visit are presented in section 9.3.2 as the author consider this a site visit and sampling work for metallurgical testing.

13 Mineral processing and metallurgical testing (Item 13)

No metallurgical tests were done on the Lac Arsenault Zone.

Samples were taken during site visit in June by GoldMinds for Canadian Gold and have been sent to SGS laboratory in Qc for flotation and recoveries tests.

Environmental tests

Canadian Gold Ltd. for the purpose of mineral characterization for its bulk sample request for permit has initiated an evaluation of the potential of acid generation as well as potential of lixiviation of metals.

Tests were done at SGS Laboratory and compilation of analytical results was prepared by Laury Gauthier MBA-Chemist (Laury Gauthier Enr.) on May 15th 2024. Conclusion extract :

Five out of six ore* samples were classified as "potentially acidogenic" mainly due to their low carbonate content. For waste rock, two samples out of five were qualified as “potentially acidogenic”. Assuming that waste rock produced on a large scale would be combined before storage, the combined material could clearly be described as "non-acidogenic".

* there is no ore at Lac Arsenault.

14 Mineral resource estimate (Item 14)

There are no mineral resources for this report.

23 Adjacent properties (Item 23)

Following information of this subsection are collected from GESTIM website run by the Ministère de l'Énergie et des Ressources Naturelles du Québec, on July 2024. There are different properties directly adjacent to the Lac Arsenault property and located in a radius of about 5 km. Those can be visualized on Figure 51. The closest properties to the Lac Arsenault are to the East Patricia Lafontaine and Glenn Griesbach. The property has a notch with claims of Patricia Lafontaine.

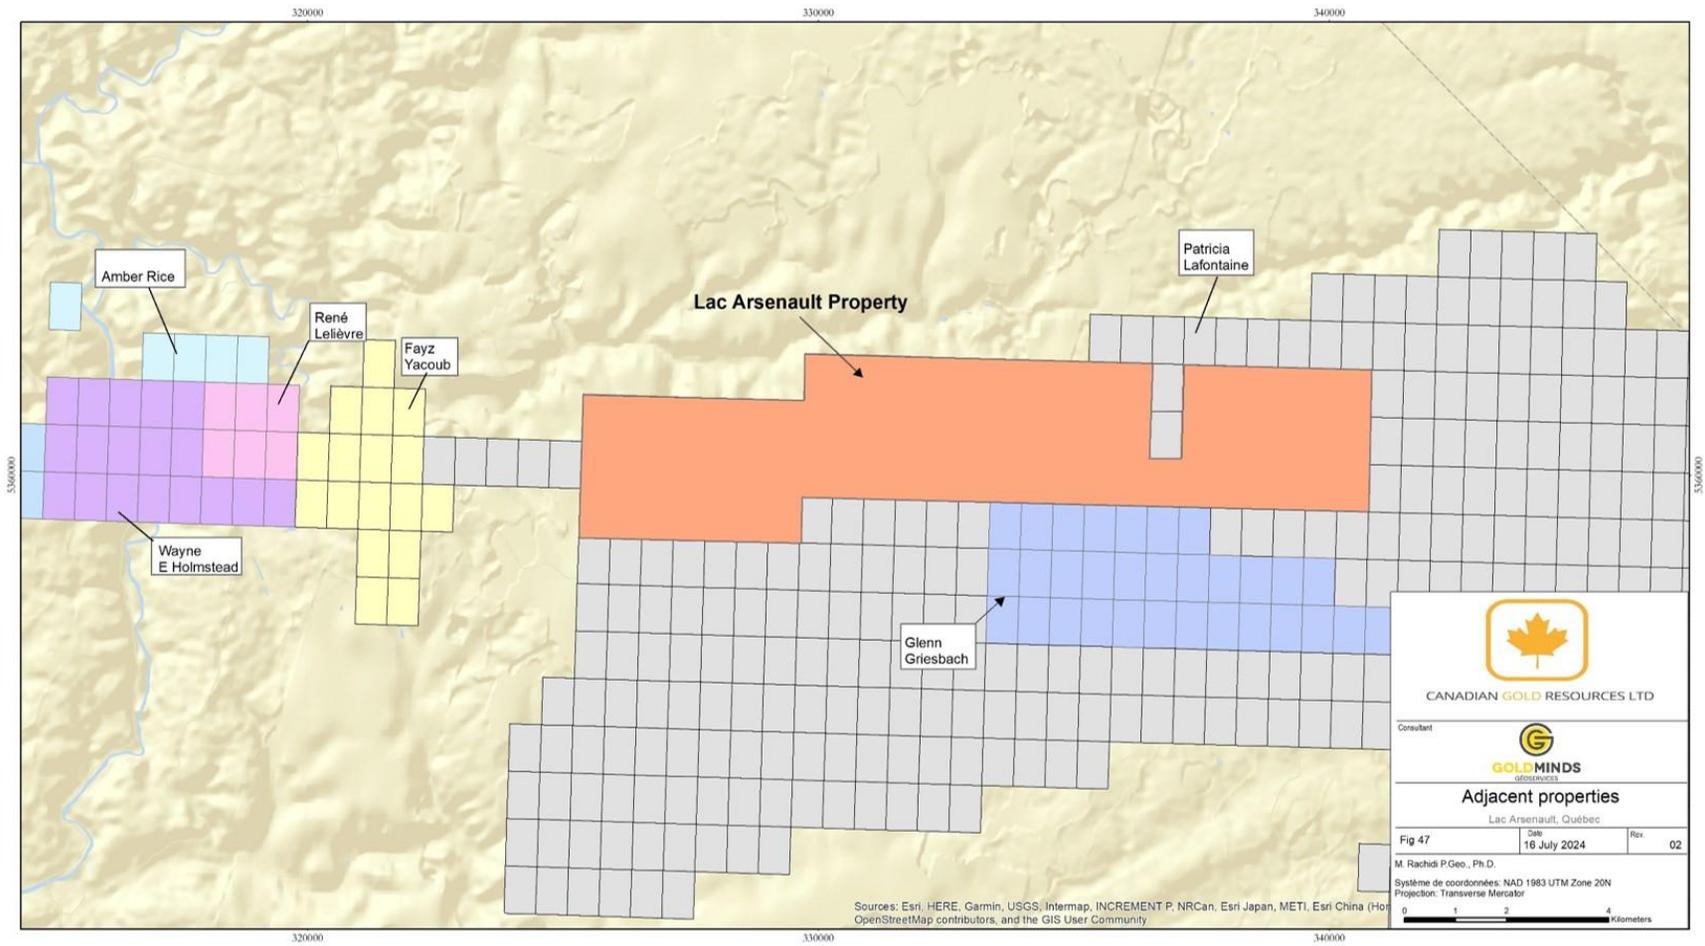


Figure 51 : Adjacent properties

24 Other relevant data and information (Item 24)

No adverse protests or objections to the mine development and exploration have been observed at Lac Arsenault property. The local population expressed their confidence in the project, as it is expected that new jobs will be created in this region.

Canadian Gold Ltd. has started the process of demand for a bulk sample at Lac Arsenault property. Amongst the permits and requests are:

- + ATI Authorisation for work with impacts (brand new May 6th 2024) to Ministry of Mines
- + Request for bulk sample documents to Ministry of Mines
- + Reclamation plan to Ministry of Mines
- + Environmental authorization to Ministry of Environment MDDELCCFP
- + Request for logging and brush cutting MERN Forest

All these documents are in progress with various questions and answers from all parties

As the MERN ask for a detail mine plan for a 5000T bulk sample, the company is actually working on getting a LIDAR survey to provide that detailed plan.

The plan is to mine a 5,000 T from Baker and Mersereau vein, have it shipped to New-Brunswick by truck and thereafter barged to Newfoundland & Labrador to be haul to Beaver Brook Antimony Mine mill near Gander.

25 Interpretation and conclusions (Item 25)

The authors have reviewed the data and drill hole database and inspected the QAQC program. The authors believe that the data presented in this report are generally accurate and reasonable representation of the Lac Arsenault property.

The lac Arsenault property 100% owned by Canadian Gold Ltd. is located in the province of Québec, Gaspé Peninsula, approximately twenty-five kilometers north of the village of Paspébiac.

The mineralization in the Lac Arsenault property occurs within the Honorat Group rocks. The mineralization is vein type, characterized by brittle deformation and occurs in competent Honorat Group sandstones and greywackes. Four major veins systems were mapped at the property (Baker, Mesereau, Line 4W and Marleau Vein Systems). In addition to the mineralized vein systems, mineralized quartz vein float of unknown origin have also been located on the property.

A surface mapping using trenches was done in 2020 by the 1844 Resources's geologist (Desrochers, 2020). The mineralized zones correspond mainly to shear zones with extension veins locally folded. When these veins folded form panels oriented N-S to N030 with a maximum width of 1.6 metres. The deformation corridors which are associated with gold mineralization seem to be post-dating the folding phase in the sedimentary rocks (Desrochers, 2020).

The drilling program completed by 1844 Resources on the Lac Arsenault property consisted of eleven diamond holes drilled in 2021 totaling 1951.9 metres. A total of 366 assay intervals (not including blank, standards and duplicate) totaling 376.4 meters were analyzed by ALS laboratory at Val d'Or, Québec. The diamond drilling data were verified and validated by the authors. The best intersection come from drill holes LA-21-02, -03 and -08.

The author visit the site. A subsequent independent sampling show high mineralized zones with up to 17.43 g/t Au at Baker vein. The authors believe that the various mineralized structures on the Lac Arsenault property (L4W, Donat, Baker, Mersereau and Marleau), have excellent exploration potential along strike and at depth surrounding the Au showings. More detailed knowledge and understanding of the property-scale controls and structures will help guide and focus future drilling programs. The authors believe that the Canadian Gold Resources LTD., could continue to refine its understanding of the structural complexity to help interpret and define other potentially mineralized structures along the different vein zones.

The authors believe that the Canadian Gold Resources LTD. & Amseco Exploration Ltd., should continue follow-up exploration, drilling, metallurgical investigation and project development activities on the Property.

The mining exploration at Lac Arsenault is at an early stage of development, there is no guarantee that future work will lead to an economic viable project.

There are important risks and uncertainties expected to affect the reliability or confidence in the project. A major risk is obviously tied to the 2020-2021 Covid-19 pandemic relics. The Covid-19 pandemic affect some commodity prices, including gold, due to fluctuations in economic activity, all of which directly affect mining operations worldwide with demands. No one can predict how deep its effect on the worldwide economy and how wars (Ukraine and Palestine) and long economic and immigration crisis will last.

The authors are not aware of any external factors or risks that may affect the Lac Arsenault project (e.g., changes in metal prices, exchange rates, availability of investment capital, change in government regulations, etc.). Significant opportunities that could improve the economics; timing and permitting of the Project. Further information and evaluation are required before these opportunities can be included in the project economics.

26 Recommendations (Item 26)

The recommendations aims at validating what has been identified with metallurgical testing, bulk sample application and thereafter could be followed by additional drilling. It could in a subsequent phase test other known occurrences, to test new target areas, and to continue assess the overall potential of the Property. The second phase drilling program designed using the drillholes database and also surface samples taken from the exposed veins by Claude Duplessis Eng., (Independent qualified person) during the site visit. Four surface samples returned greater than 6 g/t Au, three were greater than 260 g/t Ag, and the highest value was 17.43 g/t Au from Baker vein (sample 21908A) also containing 204 g/t Ag. The authors recommend also a trenching program and surface exploration mainly in the area with gold potential (Table 16).

Should the client elect to go for a bulk sample underground, authors recommend geotechnical drillholes at the property and the following table shows the recommended works.

Table 16: Estimation of the exploration program at the Lac Arsenault property

Recommended works	All included cost (\$CAD)
Collar survey/topographic surface/density measurement	10,000
Metallurgical test for recovery	50,000
Environmental tests	50,000
Lidar survey	75,000
Surface exploration works - regular channel samples	50,000
Estimation of Mineral resources (update NI43-101 technical report); assistance in press release and act as independent QP	75,000
Application for Bulk samples & reclamation plan	100,000
Total	410,000

- The author suggests specific gravity measurement on sample program which should allow conversion at adequate estimation of tonnage.
- A collars survey using station total is needed for the 2021 drill holes.
- A topographic survey on all the property is highly recommended.
- A hydrogeological study is recommended to reduce risks associated with ground water and better define the water management strategy.
- A geotechnical data collection program is recommended if Underground bulk sample is selected to include more parameters (fractures, joints, shearing, roughness, weathering, alteration, etc).
- A metallurgical tests will be required at the Lac Arsenault zone.
- More exploration works on the corridors of deformation oriented NNE.

The authors believe that the recommended work program and proposed expenditures are appropriate and believe that the estimated budget reasonably reflects the type and amount of contemplated activities.

27 References (Item 27)

- Bussi eres, Y., 2021. REPORT ON DIAMOND DRILLING HONORAT PROSPECT GASPE PENINSULA QUEBEC ESSO MINERALS CANADA PROJECT QUEBEC 28 NTS 22 A/6, GM34955, 47p.
- Bussi eres, Y., 2021. SOIL GEOCHEMISTRY REPORT LAC ARSENAULT PROPERTY VOLUME 1 OF 4 Gasp e Peninsula, Qu ebec Honorat and Weir Townships NTS sheet 22A/06, 63p.
- Card, K.D., McIlwaine, W.H., and Meyn, H.D., 1970. Operation Maple Mountain, Districts of Timiskaming, Nipissing, and Sudbury; Ontario Dept. Mines and Northern Affairs OFR5050, 275p. Accompanied by Maps P.584, P.585, scale 1:63,360 or 1 inch to 1 mile.
- Campbell, R. A., (1994). Compilation Map on the Lac Arsenault Prospect, Scale 1 inch equals 200 feet.
- Desrochers, J-P., 2020. Structural mapping and Assessment of controls on gold mineralization Lac Arsenault project, Gasp esie, p 18.
- Dub e, J., 2020. High-Resolution Heliborne Magnetic Survey Lac Arsenault Property, Pasp ebiac area, Gasp esie region, Qu ebec, 2020, 24p.
- Hup e, A., and Baker, M., 2007. Propri et e Lac Arsenault Cantons Weir et Honorat (SNRC 22A/06), 62p.
- Jay Hodgson, C., 1987. The structure of shear-related, vein-type gold deposits: a Review, Ore Geology Reviews, 4, 231-273p.
- Liboiron, A., 2001. Dans le cadre du programme d'aide financi ere aux prospecteurs de la Gasp esie et des iles-De-La-Madeleine, GM 59742, 49p.
- Malo M, Pelchat C, Dub e B, Chagnon, A., 1998. Contrasting Styles of Gold Mineralization along the Grand Pabos-Restigouche Fault System: Implication for Carlin-like Au mineralization in the southwestern Gasp e Appalachians. Exploration and Mining Geology 7(3):217-235.
- Mersereau, T.G., 1987. REPORT ON MONDOR EXPLORATIONS INC. WEIR TOWNSHIP, QUEBEC CLAIM GROUP LAC ARSENEAU AREA, GASPE PENINSULA, P.Q., GM 45384, 302p.
- Pelchat, C., 1995. Cadre structural des min eralisations aurif eres le long de la faille du Grand-Pabos, gasp esie, Qu ebec. Qu ebec, Qu ebec, Canada, Universit e Laval, 85 p.
- Provost, J-M., 1989. RAPPORT FINAL DES TRAVAUX EFFECTUES SUR LA PROPRI ET E DU BLOC LECLERC OUEST, GM 49235, 115p.
- Robertson, J.A., Card, K.D., and Fraey, M.J., 1969. The Federal-Provincial Committee on Huronian Stratigraphy: Progress Report; Ontario Dept. Mines MP31, 26p.

Robertson, J.A., Frarey, M.J., and Card, K.D., 1969. The Federal-Provincial Committee on Huronian Stratigraphy: Progress Report; Canadian J. Earth Sci., Vol.6, No.2, p.335-336.

Robinson, D., 2015. ASSESSMENT REPORT ON Mapping MMI Geochemical Sampling Stripping and Channel Sampling Grid Rehabilitation Castle #3 Rehabilitation & Castle #1 Voluntary Rehabilitation, 197p.

Bernard O. Martel., 2023. Projet Lac Arsenault : Cartographie et Prospection 2023 SNRC 22A06

Gauthier L., 2024. Caractérisation de Minerais et Stériles Miniers – Projet Lac Arsenault – Évaluation du Potentiel de Génération d’acide et du potentiel de lixiviation.